VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

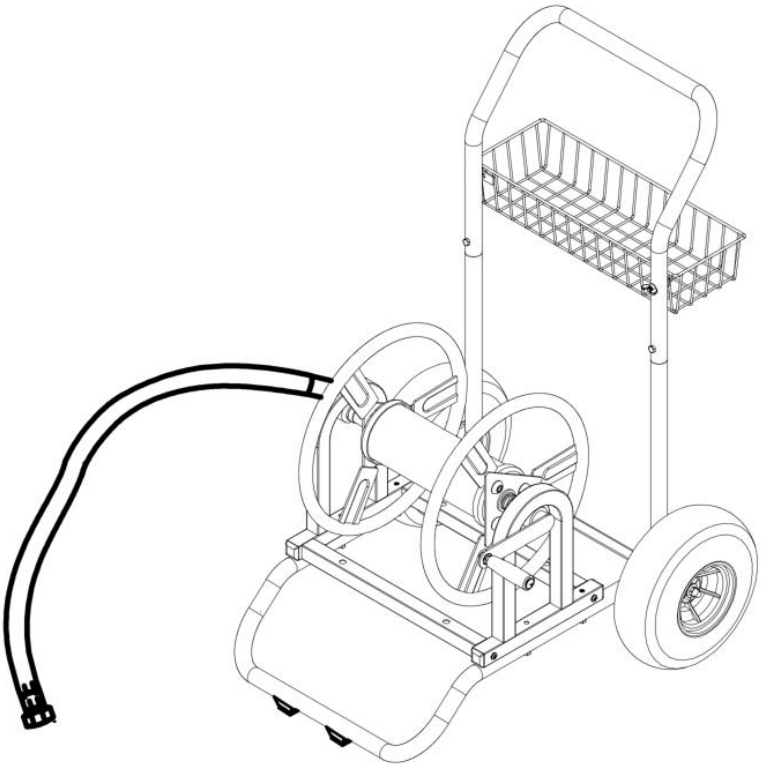
MODEL:ALQ-200-2

VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODEL:ALQ-200-2



This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This symbol, placed before a safety comment, indicates a kind of precaution, warning, or danger. Ignoring this warning may lead to an accident. To reduce the risk of injury, fire, or electrocution, please always follow the recommendation shown below.

Rules for Safe Operation

WARNING:

The following safety precautions are suggested. This Hose Reel Cart is designed, engineered and tested to offer reasonably safe and effective service, provided that it is operated in strict accordance with these instructions. Failure to do so may result in personal injury. Always observe the rules of safe operation.Please read and retain this manual.

1. Be alert for holes in the terrain and other hazards.
2. Follow maintenance and lubrication instructions as outlined in this manual.
3. Always wear substantial footwear.Do not wear loose fitting clothing that may get caught in moving parts.
4. DO NOT SIT OR STAND ON THIS ITEM.
5. This product is not a toy nor. Do not allow children to play with or near this item.
6. Use only on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Chest.
7. Use as intended only.
8. Inspect before every use; do not use if parts are loose or damaged.

ASSEMBLY PRECAUTIONS:

1.Assemble only according to these instructions. Improper assembly can create hazards.






2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3.Keep assembly area clean and well lit.
4.Keep bystanders out of the area during assembly.
5.Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6.Product capabilities apply to properly and completely assembled product only.
7.Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Pressure Washer Hose Reel Cart.




SAVE THESE INSTRUCTIONS





Model	ALQ-200-2
Maximum Capacity (5/8”Flexible Pipe)	200ft
Number of Wheels	2
Colour	Silver Gray

Carton Contents

Ref.	Description	Picture	QTY.
A1	Hose Reel -1		1
A2	Hose Reel -2		1


B	Drum		1
C	Left Bracket		1
D	Right Bracket		1
E	Horizontal Bar		2
F	Handle Rod		1
G	Net Basket		1
H	Front Outriggers		1

I	Putt		1
J	Support Pole		2
K	Wheel		2
L	Water Pipe		1
M	Axle		1
N	Water Pipe Connector		1
O	Three-way Connection		1
P	Handle		1


Q	Gasket		1
R	Screw M6*60		4
S	Screw M6*30		2
T	Screw M6*20		6
U	Screw M8*45		4
V	Screw M6*40		2
W	Nut M6		8
X	12mm Large Washer		2
Y	Nut M12		2

Assembly Instructions

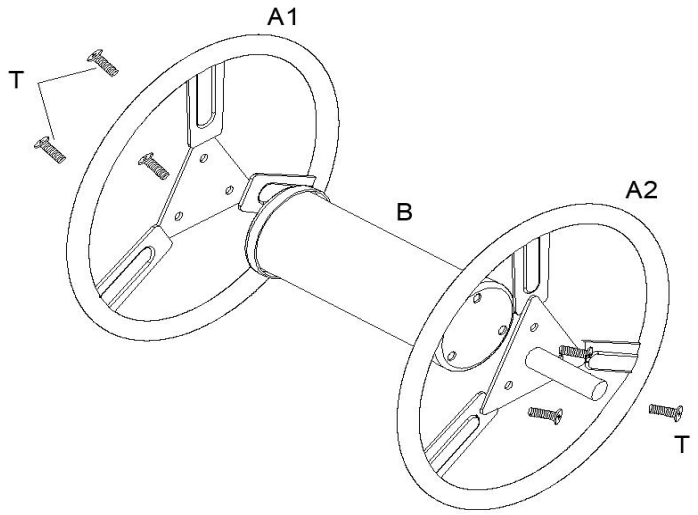
Step1.Attach Hose reel-1(A1) and Hose reel -2(A2) and drum (B) together with Screw M6*15mm bolts (T)



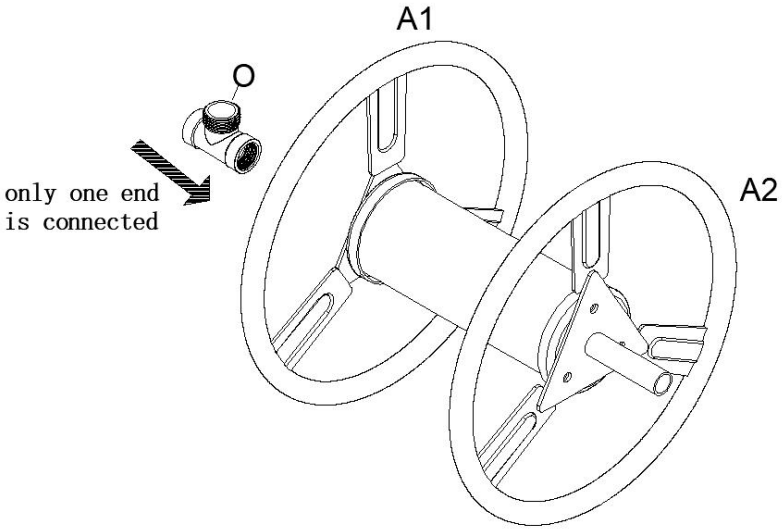
Step 2.Assemble Three-way CONNECTOR (o) to the Hose Reel-1 (A1)



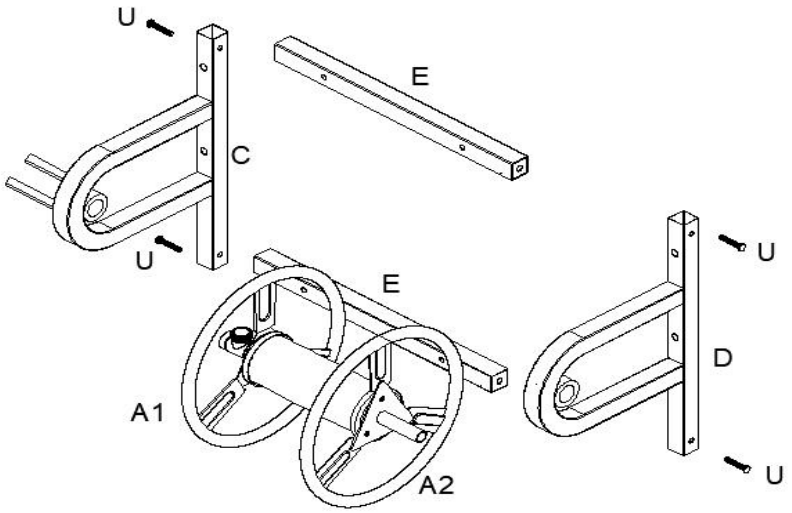Step 3.Insert hose reel (A2) of the accessory into the ringht brabcket (D) Attach left bracket (C) and right bracket (D) and horizontal bar (E) together with screw M8*45mm bolts (U).




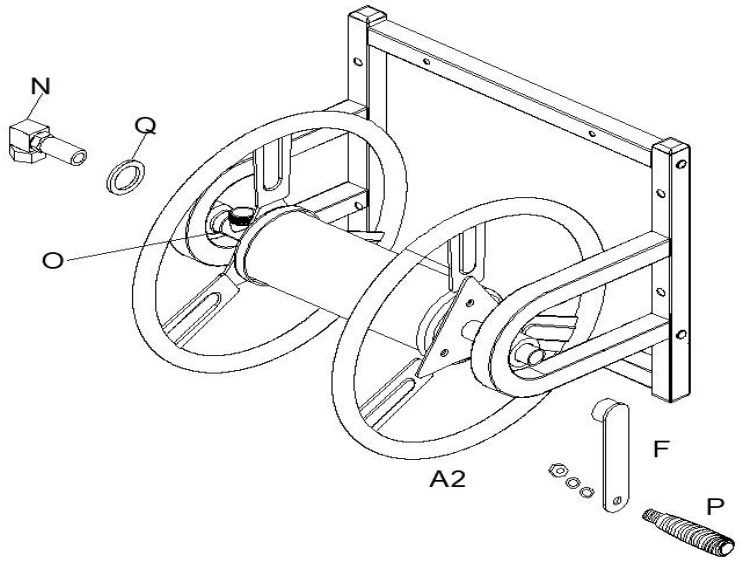Step 4.Assemble gasket (Q) and water pipe connector (N) and hose reel (A1) onto three-way connection (O).
Assemple Handle rod (F) onto hose reel (A2).Attach Handle W/bolt (P) to Crank handle using handle bolt.




Step 5.Slide axles (M) through tabs on the bottom of support pole (J)

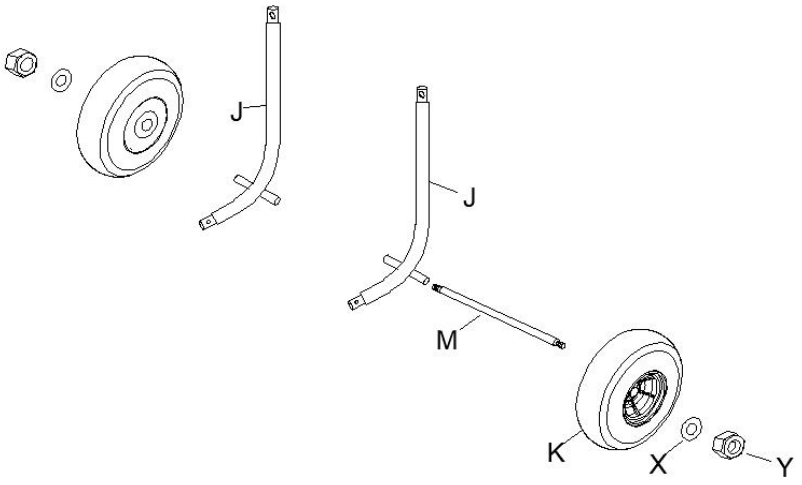Install wheel (K) using 12mm large washer (X) and nut M12 (Y)




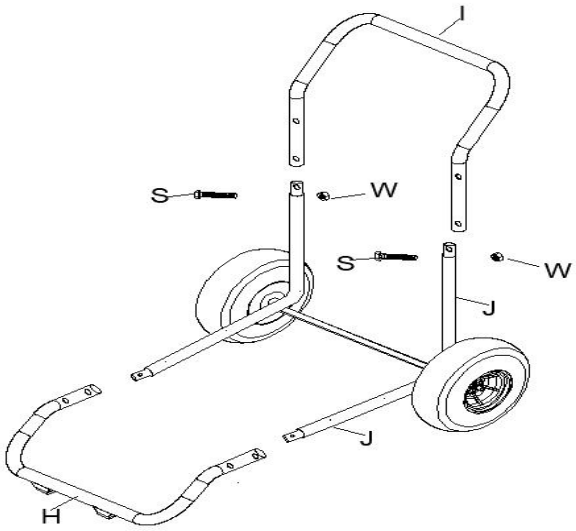Step 6.Attach Putt (I) and Support Pole (J) together with Screw M6*30mm bolt (S) and nut M6(W).
Attach Front outriggers (H) and Support Pole (J) together.




Step 7.Assemble STEP 4 and STEP 6 together using screw M6*60mm (R)

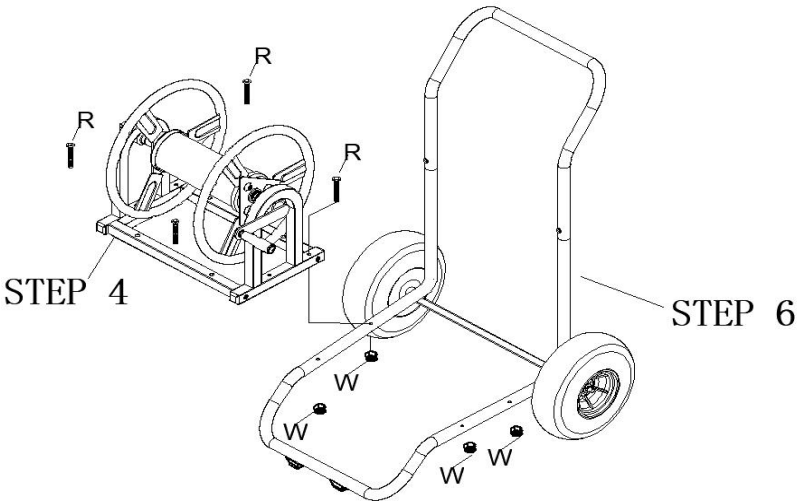
And nut M6 (W)



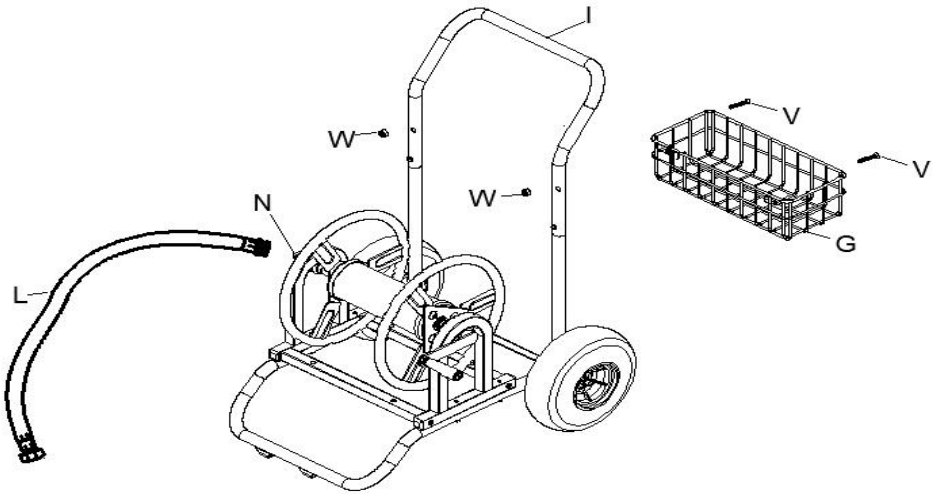Step8. Assemble Net basket (G) and putt (I) together using screw M6*40mm(V) and nut M6 (W).
Assemble Water pipe (L) and Waterpipe connector (N) together .



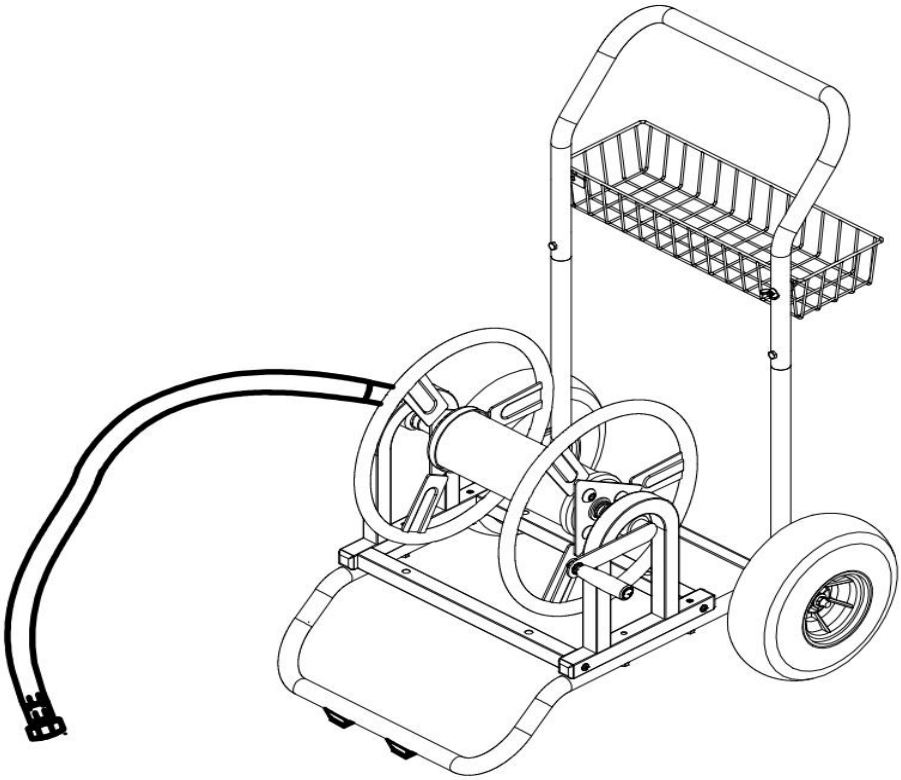Step 9.



Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

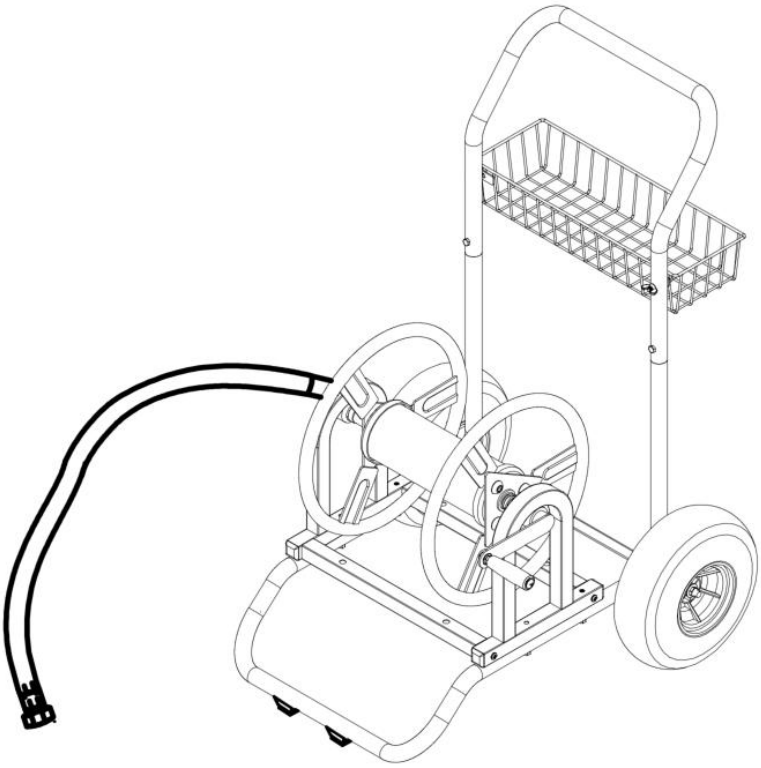
MODEL:ALQ-200-2

VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODEL:ALQ-200-2



This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This symbol, placed before a safety comment, indicates a kind of precaution, warning, or danger. Ignoring this warning may lead to an accident. To reduce the risk of injury, fire, or electrocution, please always follow the recommendation shown below.

Rules for Safe Operation

WARNING:

The following safety precautions are suggested. This Hose Reel Cart is designed, engineered and tested to offer reasonably safe and effective service, provided that it is operated in strict accordance with these instructions. Failure to do so may result in personal injury. Always observe the rules of safe operation.Please read and retain this manual.

1. Be alert for holes in the terrain and other hazards.
2. Follow maintenance and lubrication instructions as outlined in this manual.
3. Always wear substantial footwear.Do not wear loose fitting clothing that may get caught in moving parts.
4. DO NOT SIT OR STAND ON THIS ITEM.
5. This product is not a toy nor. Do not allow children to play with or near this item.
6. Use only on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Chest.
7. Use as intended only.
8. Inspect before every use; do not use if parts are loose or damaged.

ASSEMBLY PRECAUTIONS:

1.Assemble only according to these instructions. Improper assembly can create hazards.






2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3.Keep assembly area clean and well lit.
4.Keep bystanders out of the area during assembly.
5.Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6.Product capabilities apply to properly and completely assembled product only.
7.Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Pressure Washer Hose Reel Cart.




SAVE THESE INSTRUCTIONS





Model	ALQ-200-2
Maximum Capacity (5/8”Flexible Pipe)	200ft
Number of Wheels	2
Colour	Silver Gray

Carton Contents

Ref.	Description	Picture	QTY.
A1	Hose Reel -1		1
A2	Hose Reel -2		1

B	Drum		1
C	Left Bracket		1
D	Right Bracket		1
E	Horizontal Bar		2
F	Handle Rod		1
G	Net Basket		1
H	Front Outriggers		1


I	Putt		1
J	Support Pole		2
K	Wheel		2
L	Water Pipe		1
M	Axle		1
N	Water Pipe Connector		1
O	Three-way Connection		1
P	Handle		1

Q	Gasket		1
R	Screw M6*60		4
S	Screw M6*30		2
T	Screw M6*20		6
U	Screw M8*45		4
V	Screw M6*40		2
W	Nut M6		8
X	12mm Large Washer		2
Y	Nut M12		2


Assembly Instructions

Step1.Attach Hose reel-1(A1) and Hose reel -2(A2) and drum (B) together

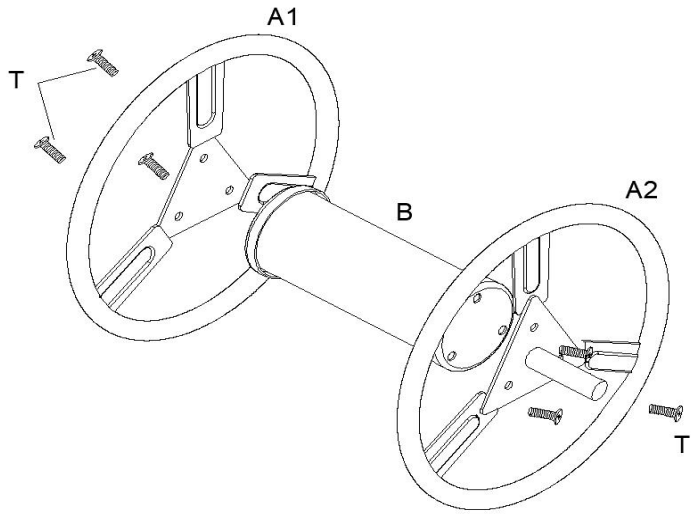with Screw M6*15mm bolts (T)




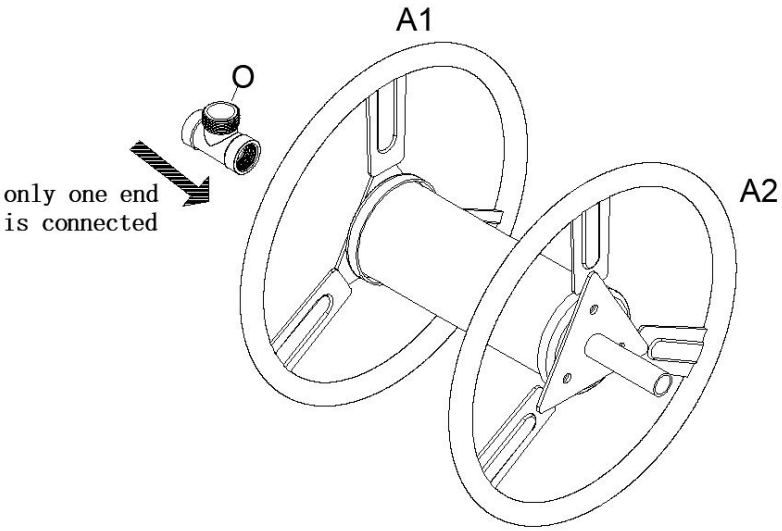Step 2.Assemble Three-way CONNECTOR (o) to the Hose Reel-1 (A1)




Step 3.Insert hose reel (A2) of the accessory into the ringht brabcket (D)
Attach left bracket (C) and right bracket (D) and horizontal bar (E) together

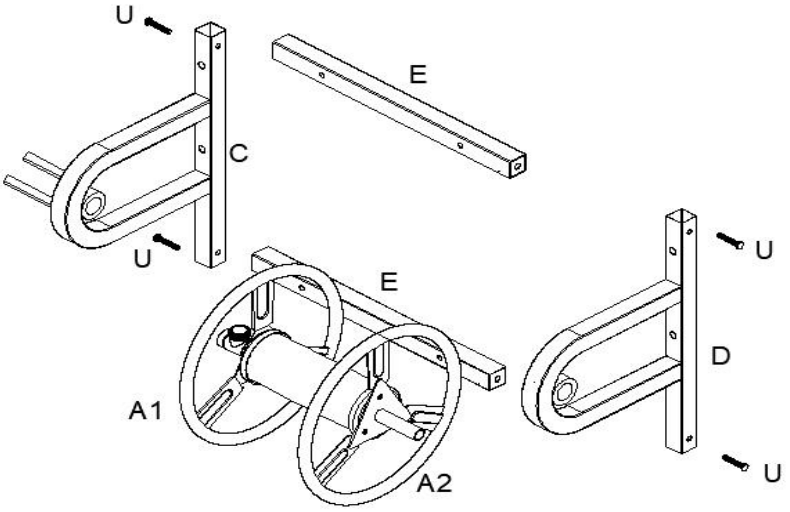
with screw M8*45mm bolts (U).



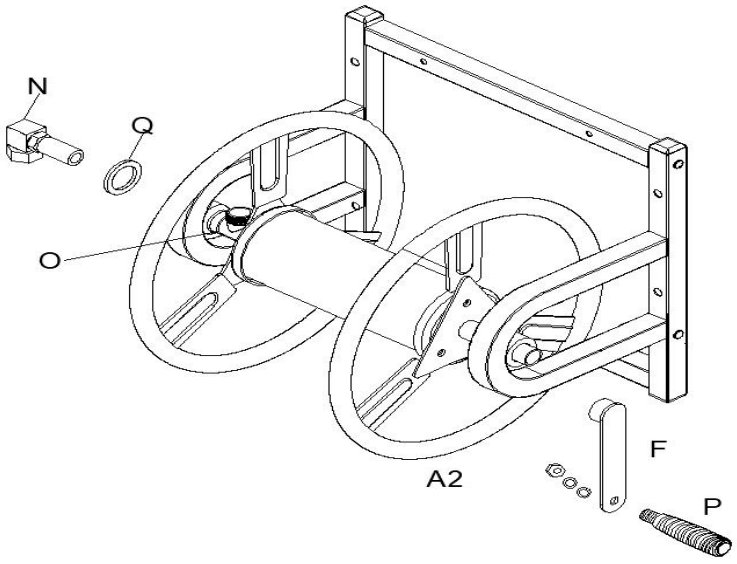
Step 4.Assemble gasket (Q) and water pipe connector (N) and hose reel (A1) onto three-way connection (O).
Assemple Handle rod (F) onto hose reel (A2).Attach Handle W/bolt (P) to Crank handle using handle bolt.



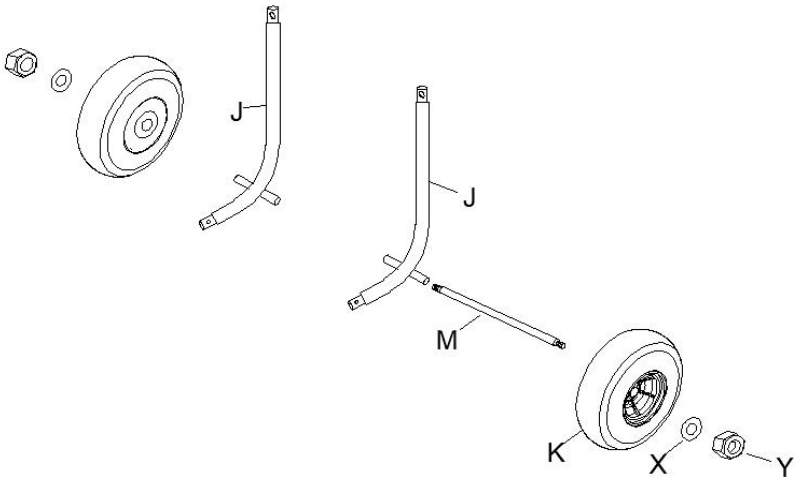
Step 5.Slide axles (M) through tabs on the bottom of support pole (J)
Install wheel (K) using 12mm large washer (X) and nut M12 (Y)



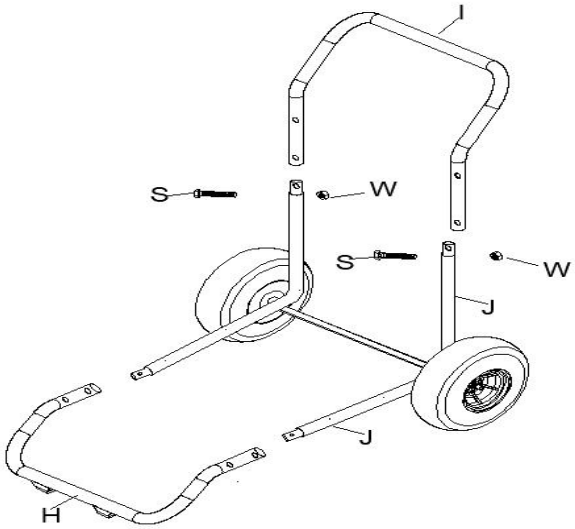
Step 6.Attach Putt (I) and Support Pole (J) together with Screw M6*30mm bolt (S) and nut M6(W).
Attach Front outriggers (H) and Support Pole (J) together.



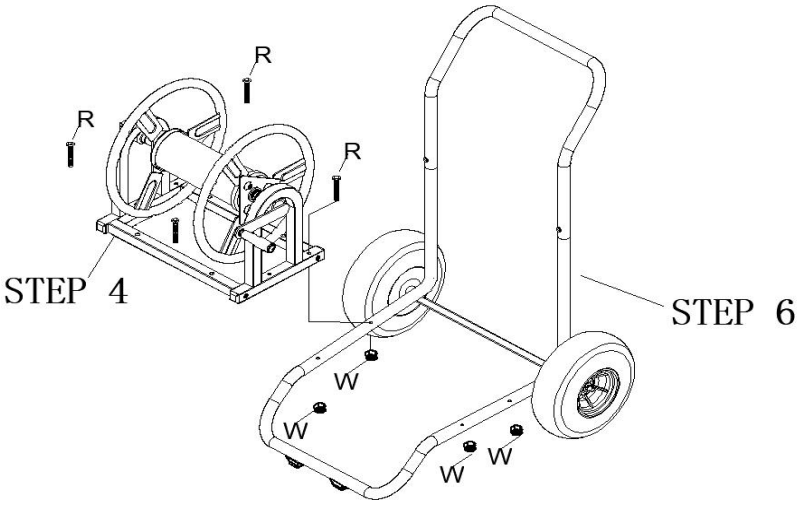
Step 7.Assemble STEP 4 and STEP 6 together using screw M6*60mm (R) And nut M6 (W)



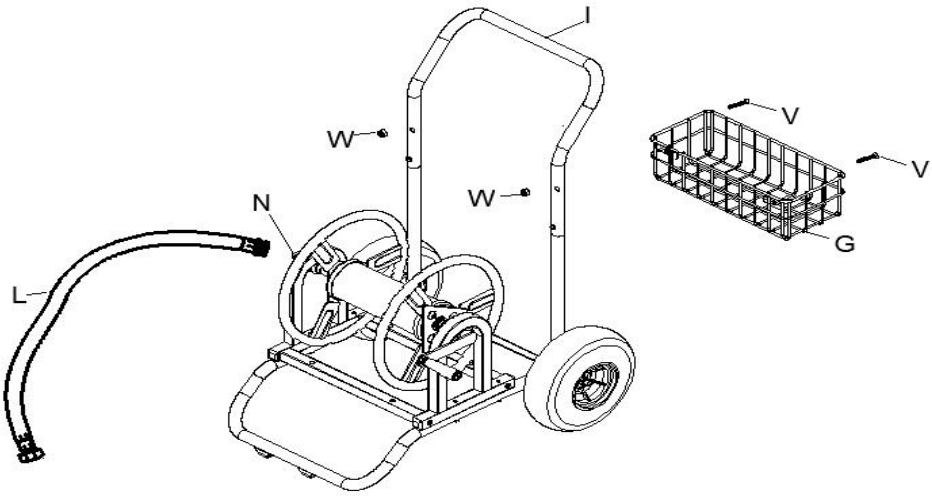Step8. Assemble Net basket (G) and putt (I) together using screw M6*40mm(V) and nut M6 (W).
Assemble Water pipe (L) and Waterpipe connector (N) together .



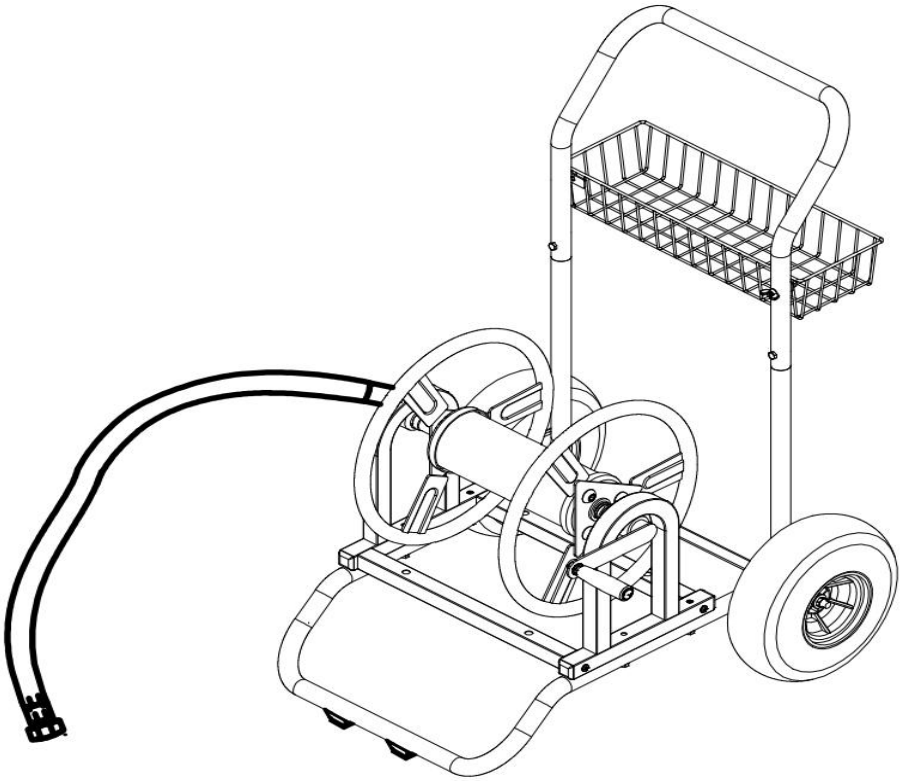Step 9.



Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Affordable. Reliable. Home Improvement.

WASSERSCHLAUCHWAGEN

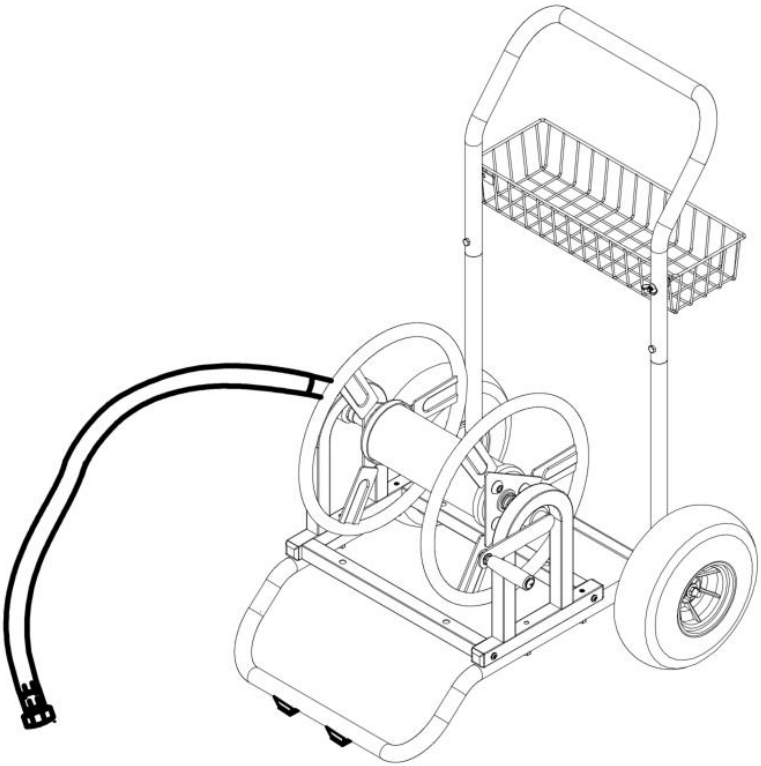
MODELL: ALQ-200-2

VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODELL: ALQ-200-2



Dies ist die Originalanleitung. Bitte lesen Sie alle Anweisungen sorgfältig durch, bevor Sie das Gerät in Betrieb nehmen. VEVOR behält sich eine klare Auslegung unserer Bedienungsanleitung vor. Das Aussehen des Produkts hängt vom gelieferten Produkt ab. Bitte haben Sie Verständnis dafür, dass wir Sie nicht erneut über Technologie- oder Software-Updates informieren.

	Warnung: Um das Verletzungsrisiko zu verringern, muss der Benutzer die Bedienungsanleitung sorgfältig lesen.
	Dieses Symbol vor einem Sicherheitshinweis weist auf eine Vorsichtsmaßnahme, Warnung oder Gefahr hin. Das Nichtbeachten dieser Warnung kann zu einem Unfall führen. Um das Risiko von Verletzungen, Bränden oder Stromschlägen zu verringern, befolgen Sie bitte stets die unten stehenden Empfehlungen.

Regeln für den sicheren Betrieb

WARNUNG:

Die folgenden Sicherheitsvorkehrungen werden empfohlen. Dieser Schlauchwagen ist entworfen, konstruiert und getestet, um einigermaßen sichere und wirksame Dienst, sofern er in strikter Übereinstimmung mit diesen betrieben wird Anweisungen. Die Nichtbeachtung kann zu persönlich Verletzung. Immer beachten Die Regeln von sicher Betrieb.Bitte lesen Und zurückbehalten dieses Handbuch.

1. Achten Sie auf Löcher im Gelände und andere Gefahren.
2. Befolgen Sie die Wartungs- und Schmieranweisungen in diesem Handbuch.
3. Tragen Sie immer festes Schuhwerk. Tragen Sie keine weite Kleidung, die sich in beweglichen Teilen verfangen könnte.
4. SITZEN ODER STEHEN SIE NICHT AUF DIESEM ARTIKEL.
5. Dieses Produkt ist kein Spielzeug. Erlauben Sie Kindern nicht, mit diesem Artikel oder in dessen Nähe zu spielen.
6. Nur auf einer flachen, ebenen, harten und glatten Oberfläche verwenden, die eine voll beladene Truhe sicher tragen kann.
7. Nur bestimmungsgemäß verwenden.
8. Vor jedem Gebrauch prüfen; nicht verwenden, wenn Teile lose oder beschädigt sind.

VORSICHTSMASSNAHMEN BEI DER MONTAGE:





1. Montieren Sie das Gerät nur gemäß dieser Anleitung. Eine unsachgemäße Montage kann zu Gefahren führen.
2. Tragen Sie während der Montage eine ANSI-zugelassene Schutzbrille und strapazierfähige Arbeitshandschuhe.
3.Halten Sie den Versammlungsbereich sauber und gut beleuchtet.
4. Halten Sie während der Montage unbeteiligte Personen vom Bereich fern.
5. Nicht zusammenbauen, wenn Sie müde sind oder unter dem Einfluss von Alkohol, Drogen oder Medikamenten stehen.
6. Die Produktfunktionen gelten nur für ordnungsgemäß und vollständig montierte Produkte.
7.Auf einer flachen, ebenen, harten und glatten Oberfläche montieren, die einen voll beladenen Hochdruckreiniger-Schlauchwagen sicher tragen kann.





BEWAHREN SIE DIESE ANWEISUNGEN AUF





Modell	ALQ-200-2
Maximale Kapazität (flexibles 5 / 8- Zoll - Rohr)	200 Fuß
Anzahl der Räder	2
Farbe	Silbergrau

Karton Inhalt

Art.-Nr.	Beschreibung	Bild	MENGE.
A1	Schlauchaufroller -1		1

A2	Schlauchaufroller -2		1
B	Trommel		1
C	Linke Klammer		1
D	Rechte Klammer		1
E	Reck		2
F	Griffstange		1
G	Netzkorb		1


H	Vordere Ausleger		1
ICH	Putten		1
J	Stützstange		2
K	Rad		2
L	Wasserleitung		1
M	Achse		1
N	Wasserrohrverbinder		1

O	Dreiwegeverbindung		1
P	Handhaben		1
Q	Dichtung		1
R	Schrauben M6*60		4
S	Schrauben M6* 30		2
T	Schrauben M6* 20		6
Du	Schrauben M 8 * 45		4
V	Schrauben M6* 40		2
W	Nuss M6		8
X	12 mm große Unterlegscheibe		2


Y	Nuss M 12		2

Montageanleitung

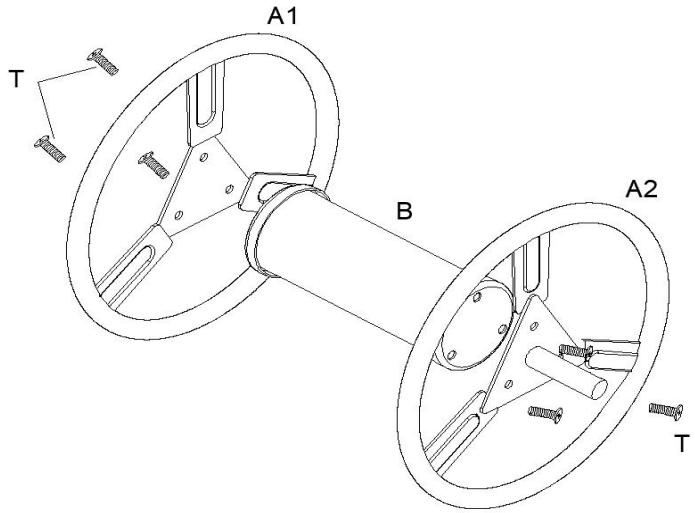Schritt 1. Befestigen Sie Schlauchaufroller 1 (A1) und Schlauchaufroller 2 (A2) und Trommel (B) mit Schrauben M6 x 15 mm (T).




Schritt 2. Montieren Sie den Dreiwege-ANSCHLUSS (o) an der Schlauchtrommel-1 (A1).

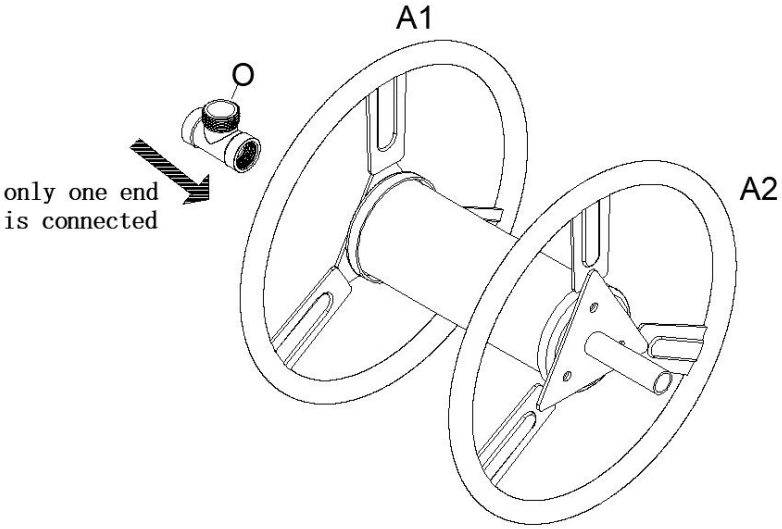


Schritt 3. Schlauchtrommel (A2) des Zubehörs in die Ringhalterung (D) einsetzen

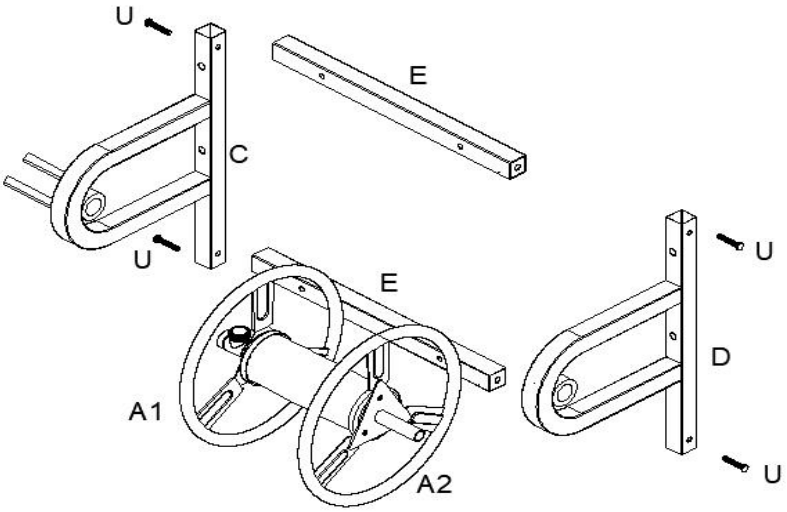
Befestigen Sie die linke Halterung (C) und die rechte Halterung (D) sowie die horizontale Stange (E) mit den Schrauben M8*45 mm (U).




Schritt 4. Montieren Sie die Dichtung (Q), den Wasserrohranschluss (N) und die Schlauchtrommel (A1) am Dreiwegeanschluss (O).
Montieren Sie die Griffstange (F) an der Schlauchtrommel (A2). Befestigen Sie den Griff mit Schraube (P) mithilfe der Griffschraube an der Kurbel.

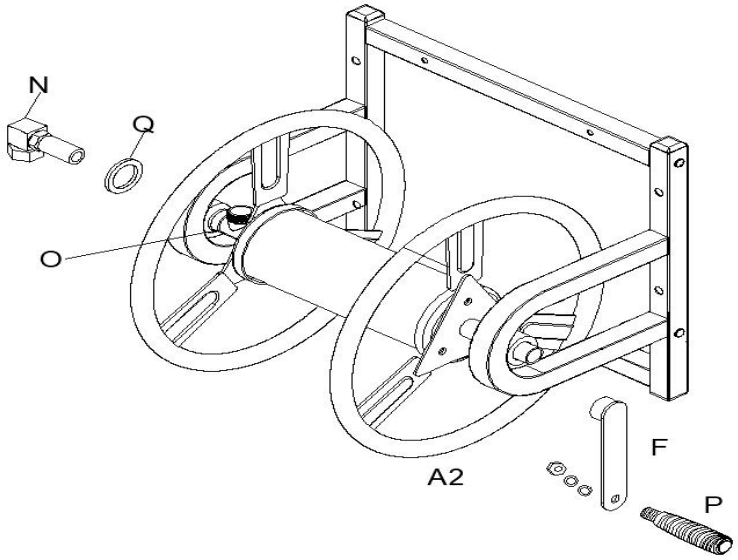

Schritt 5. Schieben Sie die Achsen (M) durch die Laschen an der Unterseite der Stützstange (J).
Rad (K) mit 12 mm großer Unterlegscheibe (X) und Mutter M12 (Y) montieren

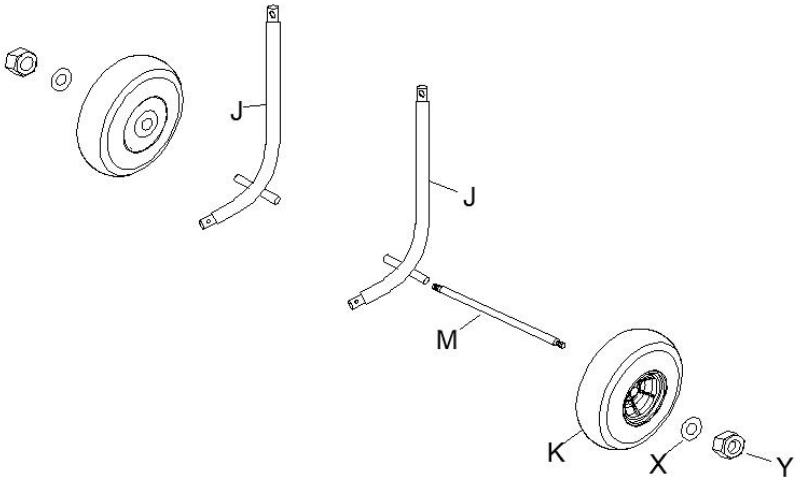


Schritt 6. Befestigen Sie Putt (I) und Stützstange (J) mit der Schraube M6*30mm (S) und der Mutter M6 (W).
Befestigen Sie die vorderen Ausleger (H) und die Stützstange (J) zusammen.

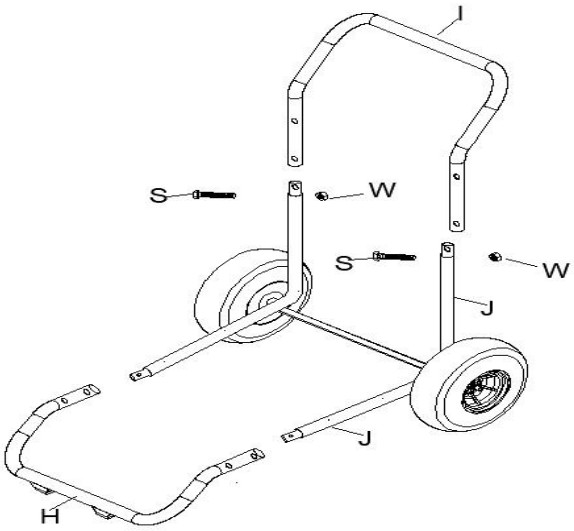


Schritt 7. Montieren Sie SCHRITT 4 und SCHRITT 6 mit der Schraube

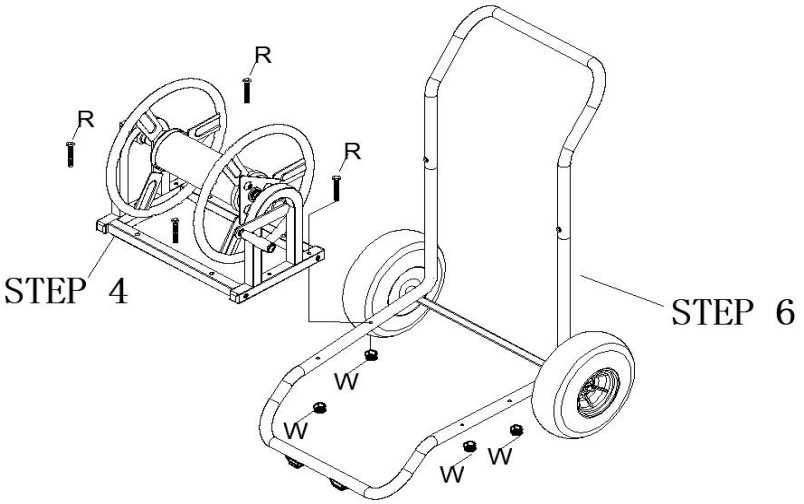
M6*60mm (R)
Und Mutter M6 (W)



Schritt 8. Setzen Sie den Netzkorb (G) und den Putt (I) mit der Schraube M6*40 mm (V) und der Mutter M6 (W) zusammen.
Bauen Sie Wasserrohr (L) und Wasserrohrverbinder (N) zusammen.

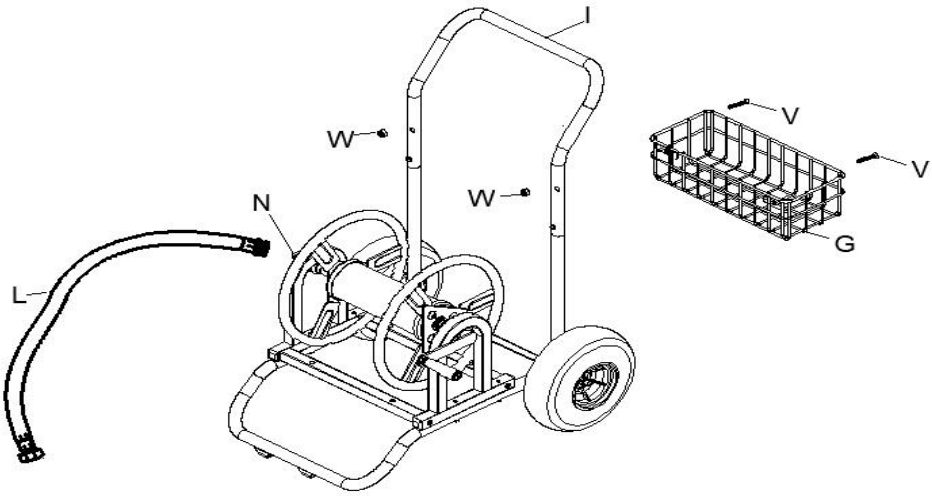

Schritt 9.

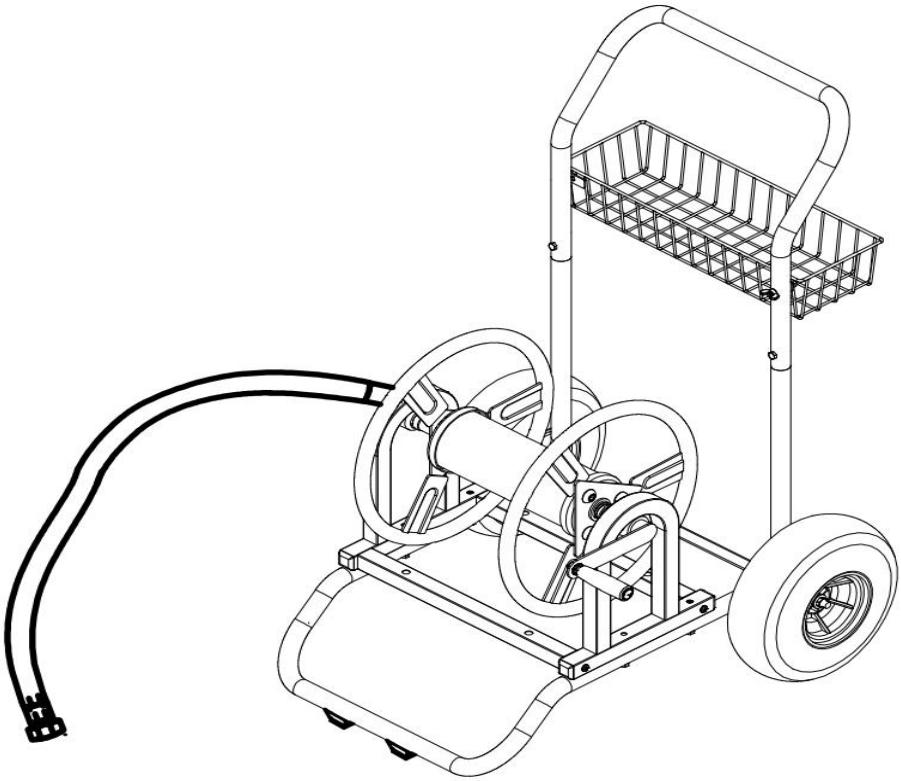

Hersteller: Shanghaimuxinmuyeyouxiangongsi
Adresse: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghai 200000 CN.
Importiert nach AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australien
Importiert in die USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

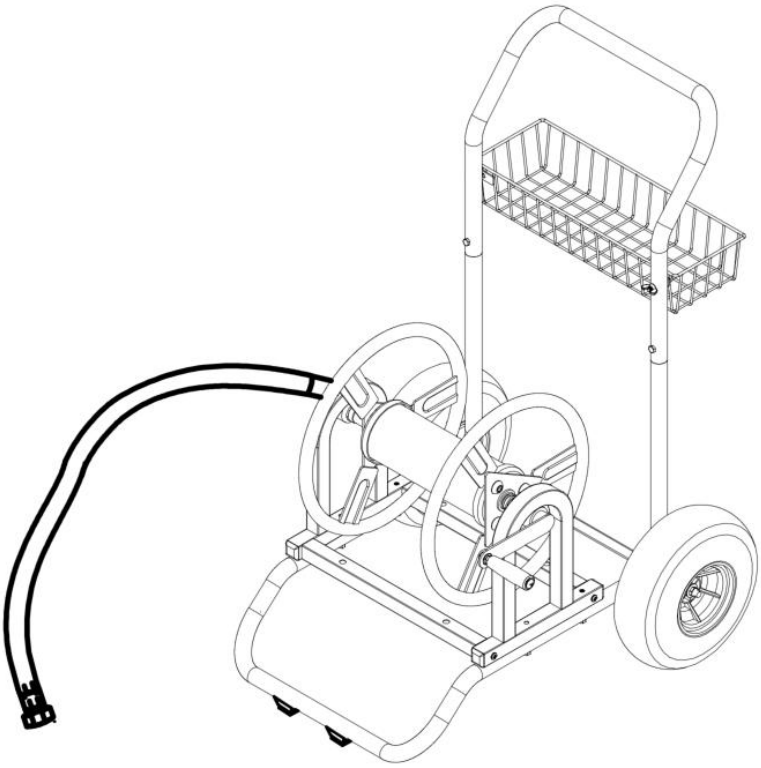
MODEL:ALQ-200-2

VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODEL:ALQ-200-2



This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This symbol, placed before a safety comment, indicates a kind of precaution, warning, or danger. Ignoring this warning may lead to an accident. To reduce the risk of injury, fire, or electrocution, please always follow the recommendation shown below.

Rules for Safe Operation

WARNING:

The following safety precautions are suggested. This Hose Reel Cart is designed, engineered and tested to offer reasonably safe and effective service, provided that it is operated in strict accordance with these instructions. Failure to do so may result in personal injury. Always observe the rules of safe operation.Please read and retain this manual.

1. Be alert for holes in the terrain and other hazards.
2. Follow maintenance and lubrication instructions as outlined in this manual.
3. Always wear substantial footwear.Do not wear loose fitting clothing that may get caught in moving parts.
4. DO NOT SIT OR STAND ON THIS ITEM.
5. This product is not a toy nor. Do not allow children to play with or near this item.
6. Use only on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Chest.
7. Use as intended only.
8. Inspect before every use; do not use if parts are loose or damaged.

ASSEMBLY PRECAUTIONS:

1.Assemble only according to these instructions. Improper assembly can create hazards.






2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3.Keep assembly area clean and well lit.
4.Keep bystanders out of the area during assembly.
5.Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6.Product capabilities apply to properly and completely assembled product only.
7.Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Pressure Washer Hose Reel Cart.




SAVE THESE INSTRUCTIONS





Model	ALQ-200-2
Maximum Capacity (5/8”Flexible Pipe)	200ft
Number of Wheels	2
Colour	Silver Gray

Carton Contents

Ref.	Description	Picture	QTY.
A1	Hose Reel -1		1
A2	Hose Reel -2		1

B	Drum		1
C	Left Bracket		1
D	Right Bracket		1
E	Horizontal Bar		2
F	Handle Rod		1
G	Net Basket		1
H	Front Outriggers		1


I	Putt		1
J	Support Pole		2
K	Wheel		2
L	Water Pipe		1
M	Axle		1
N	Water Pipe Connector		1
O	Three-way Connection		1
P	Handle		1

Q	Gasket		1
R	Screw M6*60		4
S	Screw M6*30		2
T	Screw M6*20		6
U	Screw M8*45		4
V	Screw M6*40		2
W	Nut M6		8
X	12mm Large Washer		2
Y	Nut M12		2


Assembly Instructions

Step1.Attach Hose reel-1(A1) and Hose reel -2(A2) and drum (B) together

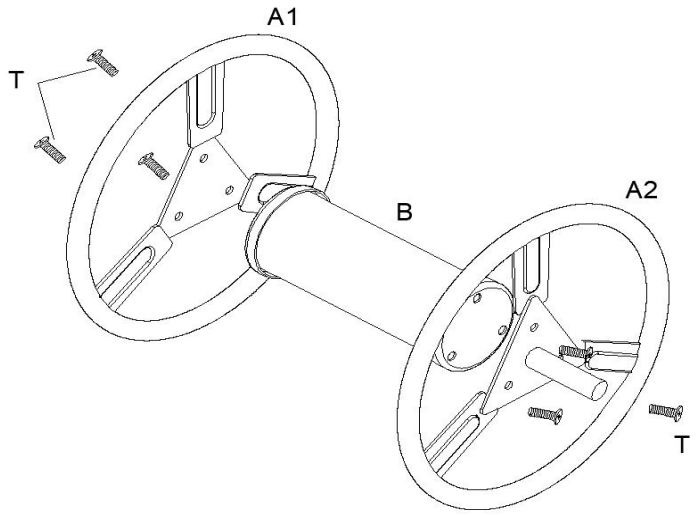with Screw M6*15mm bolts (T)




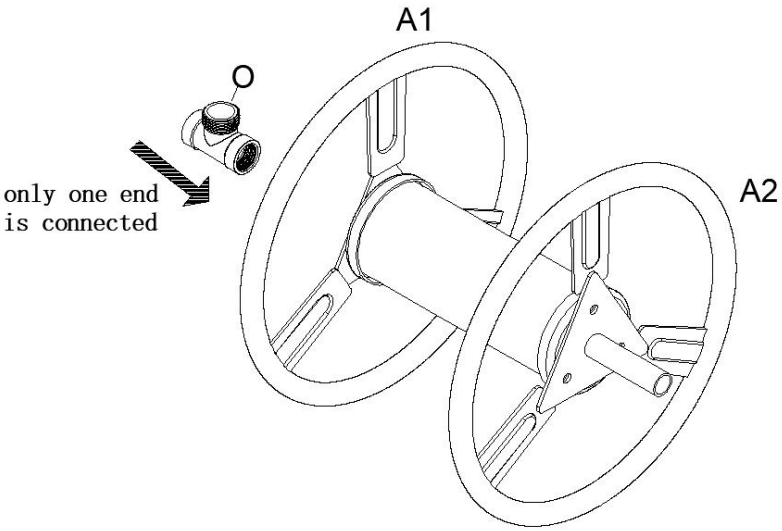Step 2.Assemble Three-way CONNECTOR (o) to the Hose Reel-1 (A1)




Step 3.Insert hose reel (A2) of the accessory into the ringht brabcket (D)
Attach left bracket (C) and right bracket (D) and horizontal bar (E) together

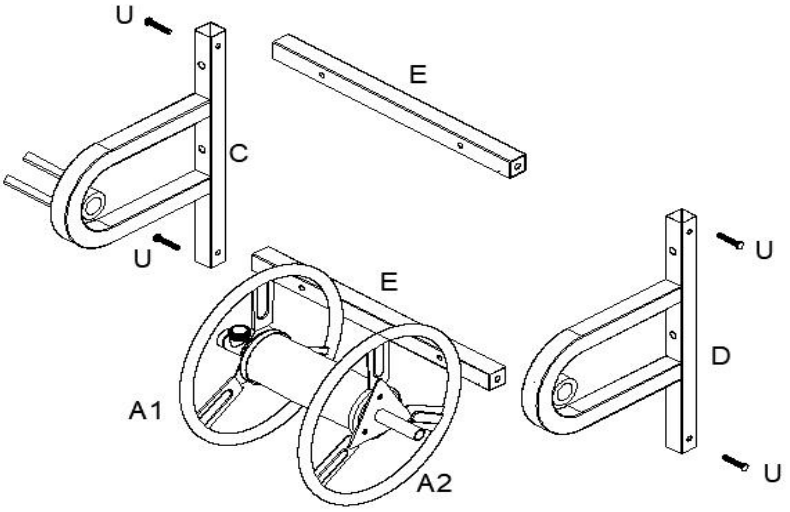
with screw M8*45mm bolts (U).



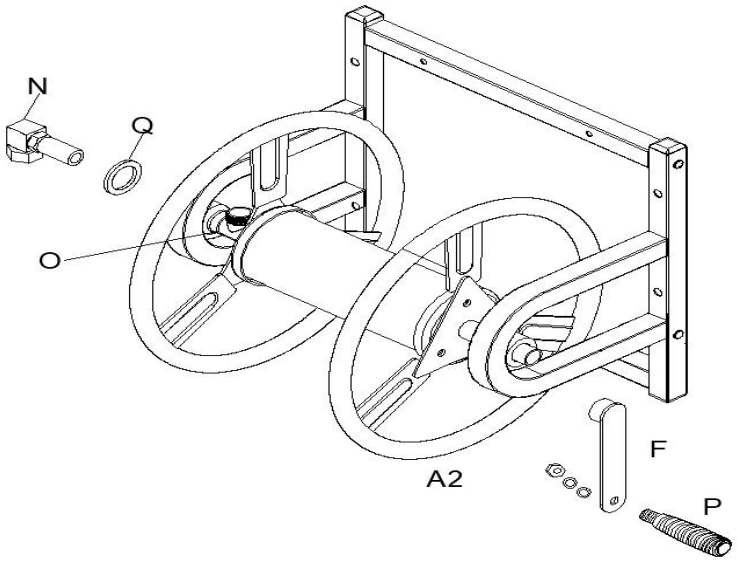
Step 4.Assemble gasket (Q) and water pipe connector (N) and hose reel (A1) onto three-way connection (O).
Assemple Handle rod (F) onto hose reel (A2).Attach Handle W/bolt (P) to Crank handle using handle bolt.



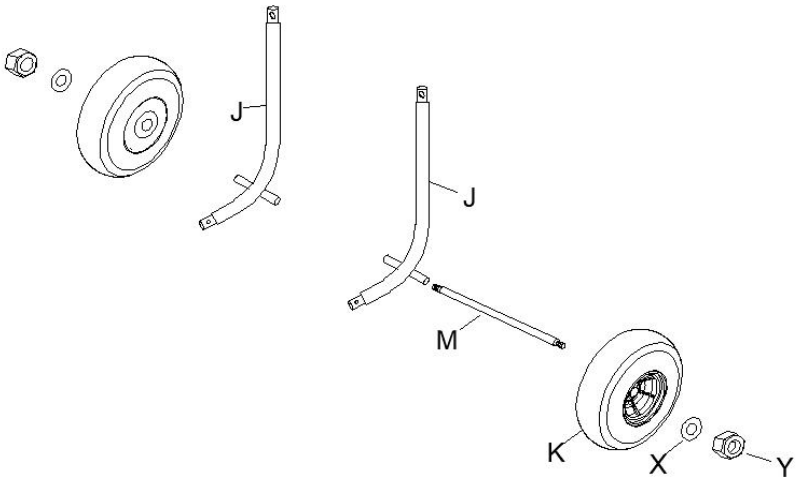
Step 5.Slide axles (M) through tabs on the bottom of support pole (J)
Install wheel (K) using 12mm large washer (X) and nut M12 (Y)



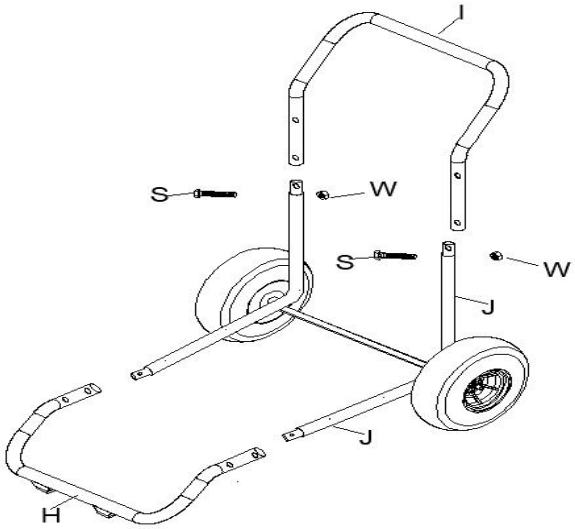
Step 6.Attach Putt (I) and Support Pole (J) together with Screw M6*30mm bolt (S) and nut M6(W).
Attach Front outriggers (H) and Support Pole (J) together.



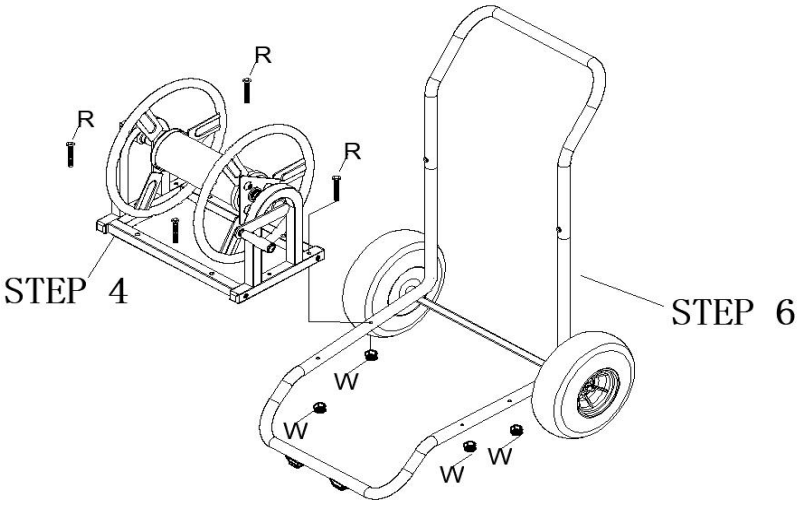
Step 7.Assemble STEP 4 and STEP 6 together using screw M6*60mm (R) And nut M6 (W)



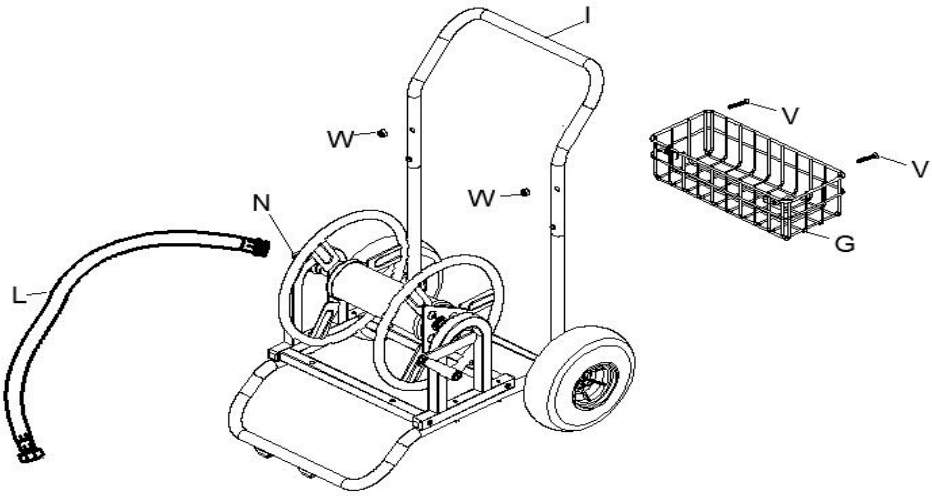Step8. Assemble Net basket (G) and putt (I) together using screw M6*40mm(V) and nut M6 (W).
Assemble Water pipe (L) and Waterpipe connector (N) together .



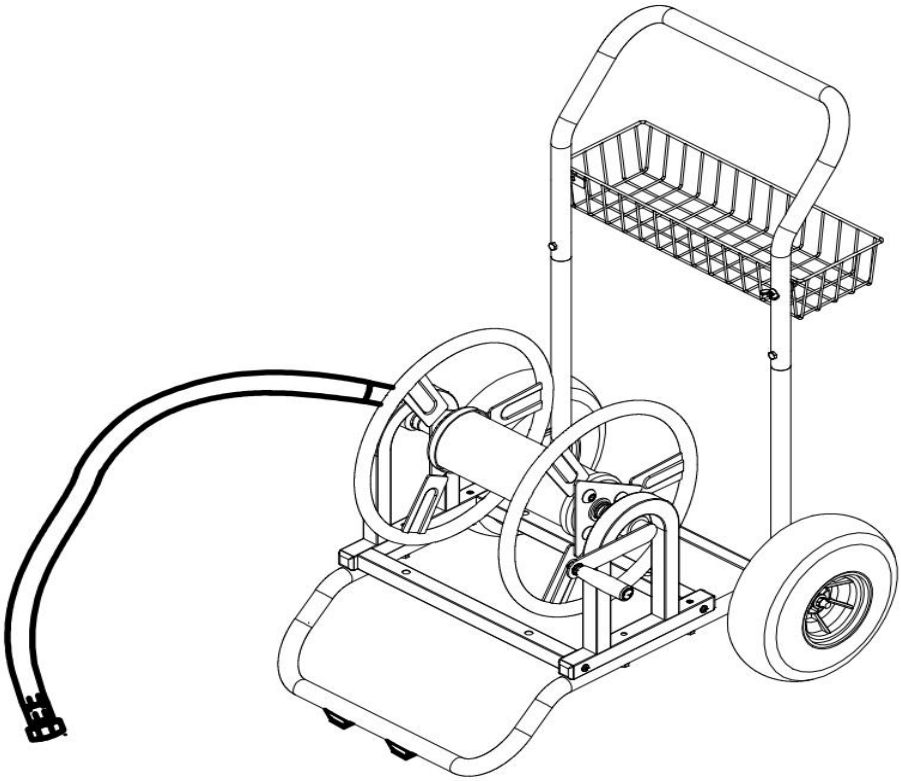Step 9.



Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

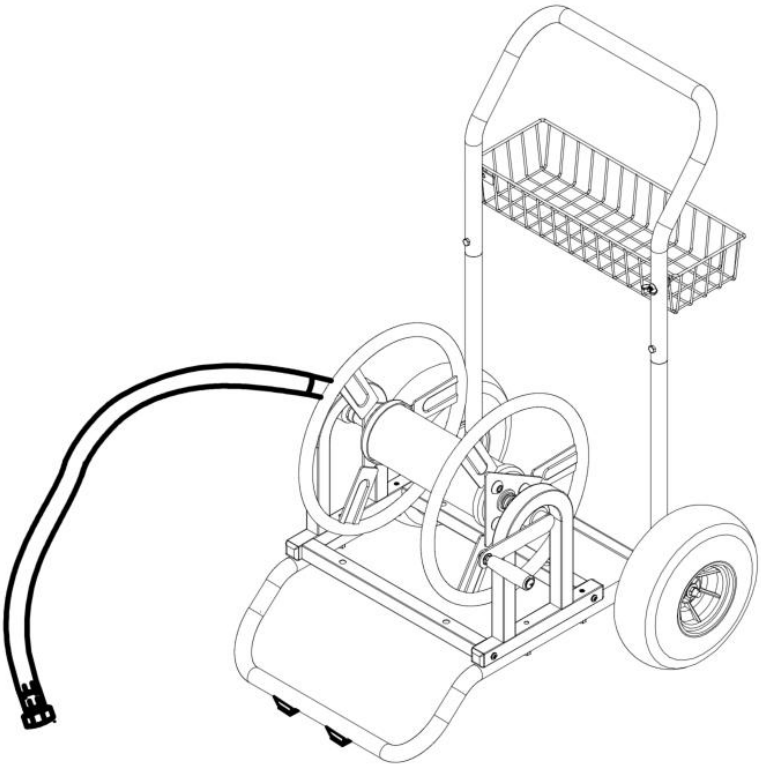
MODEL:ALQ-200-2

VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODEL:ALQ-200-2



This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This symbol, placed before a safety comment, indicates a kind of precaution, warning, or danger. Ignoring this warning may lead to an accident. To reduce the risk of injury, fire, or electrocution, please always follow the recommendation shown below.

Rules for Safe Operation

WARNING:

The following safety precautions are suggested. This Hose Reel Cart is designed, engineered and tested to offer reasonably safe and effective service, provided that it is operated in strict accordance with these instructions. Failure to do so may result in personal injury. Always observe the rules of safe operation.Please read and retain this manual.

1. Be alert for holes in the terrain and other hazards.
2. Follow maintenance and lubrication instructions as outlined in this manual.
3. Always wear substantial footwear.Do not wear loose fitting clothing that may get caught in moving parts.
4. DO NOT SIT OR STAND ON THIS ITEM.
5. This product is not a toy nor. Do not allow children to play with or near this item.
6. Use only on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Chest.
7. Use as intended only.
8. Inspect before every use; do not use if parts are loose or damaged.

ASSEMBLY PRECAUTIONS:

1.Assemble only according to these instructions. Improper assembly can create hazards.






2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3.Keep assembly area clean and well lit.
4.Keep bystanders out of the area during assembly.
5.Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6.Product capabilities apply to properly and completely assembled product only.
7.Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Pressure Washer Hose Reel Cart.




SAVE THESE INSTRUCTIONS





Model	ALQ-200-2
Maximum Capacity (5/8”Flexible Pipe)	200ft
Number of Wheels	2
Colour	Silver Gray

Carton Contents

Ref.	Description	Picture	QTY.
A1	Hose Reel -1		1
A2	Hose Reel -2		1

B	Drum		1
C	Left Bracket		1
D	Right Bracket		1
E	Horizontal Bar		2
F	Handle Rod		1
G	Net Basket		1
H	Front Outriggers		1


I	Putt		1
J	Support Pole		2
K	Wheel		2
L	Water Pipe		1
M	Axle		1
N	Water Pipe Connector		1
O	Three-way Connection		1
P	Handle		1

Q	Gasket		1
R	Screw M6*60		4
S	Screw M6*30		2
T	Screw M6*20		6
U	Screw M8*45		4
V	Screw M6*40		2
W	Nut M6		8
X	12mm Large Washer		2
Y	Nut M12		2


Assembly Instructions

Step1.Attach Hose reel-1(A1) and Hose reel -2(A2) and drum (B) together

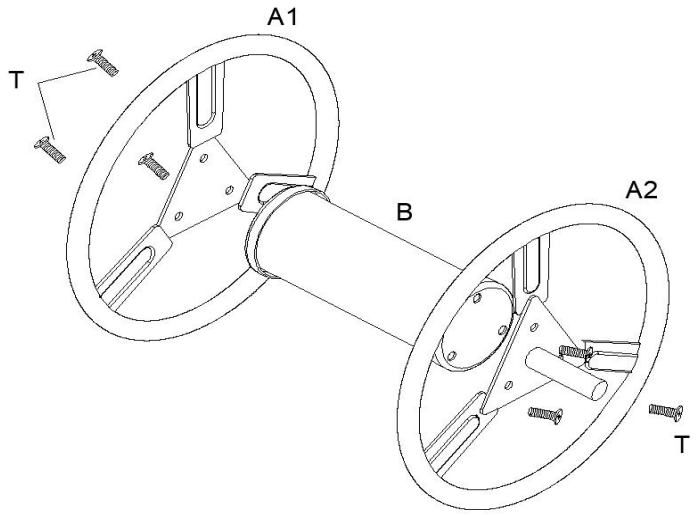with Screw M6*15mm bolts (T)




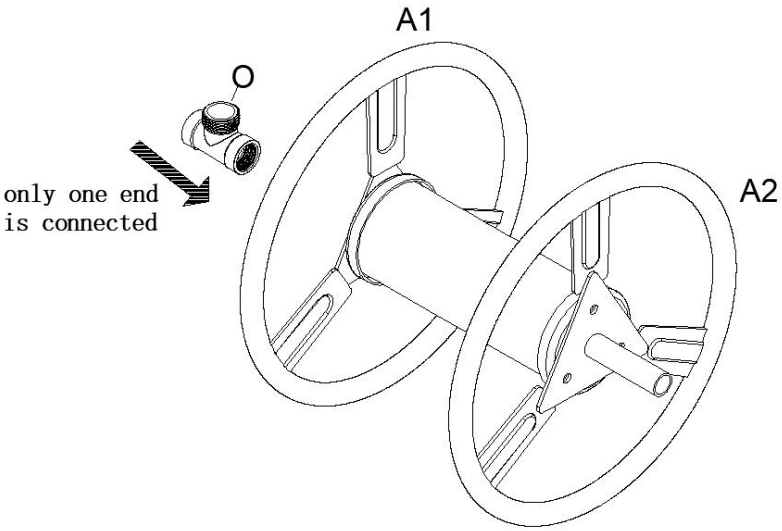Step 2.Assemble Three-way CONNECTOR (o) to the Hose Reel-1 (A1)




Step 3.Insert hose reel (A2) of the accessory into the ringht brabcket (D)
Attach left bracket (C) and right bracket (D) and horizontal bar (E) together

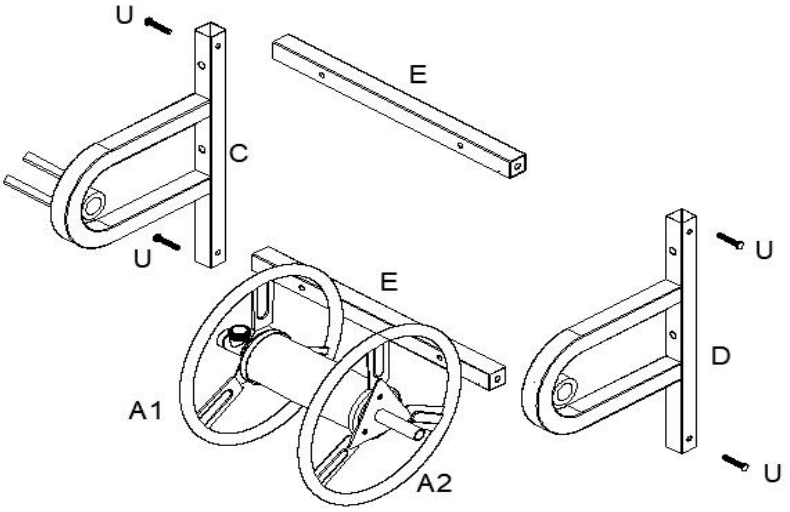
with screw M8*45mm bolts (U).



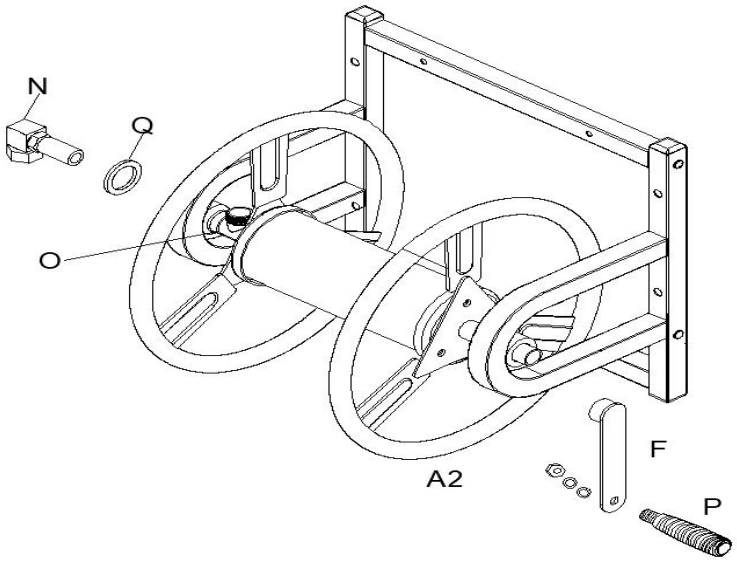
Step 4.Assemble gasket (Q) and water pipe connector (N) and hose reel (A1) onto three-way connection (O).
Assemple Handle rod (F) onto hose reel (A2).Attach Handle W/bolt (P) to Crank handle using handle bolt.



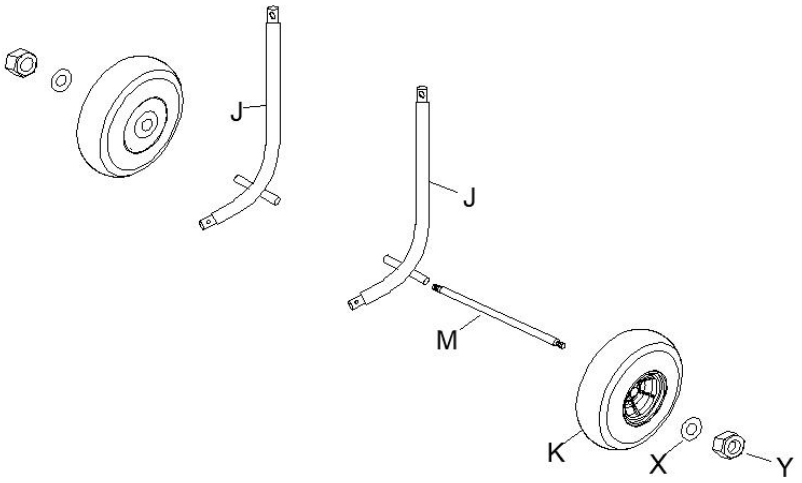
Step 5.Slide axles (M) through tabs on the bottom of support pole (J)
Install wheel (K) using 12mm large washer (X) and nut M12 (Y)



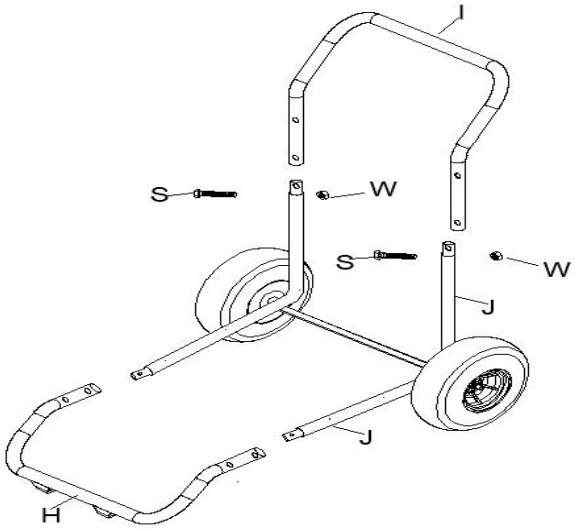
Step 6.Attach Putt (I) and Support Pole (J) together with Screw M6*30mm bolt (S) and nut M6(W).
Attach Front outriggers (H) and Support Pole (J) together.



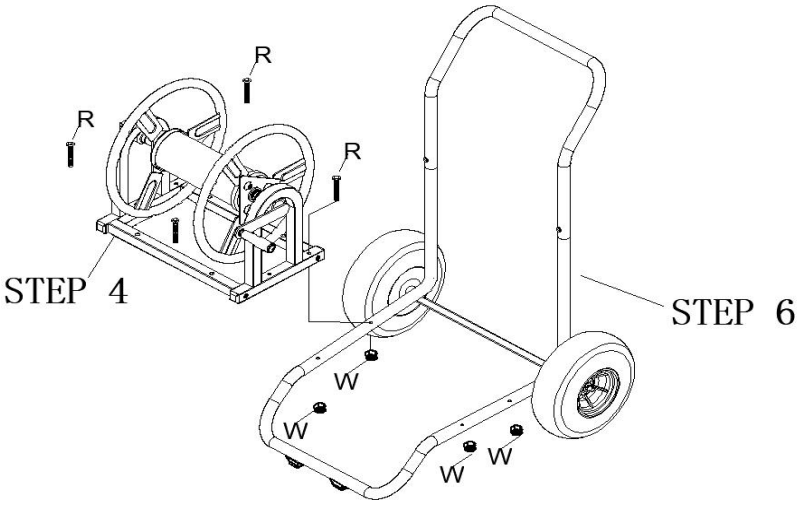
Step 7.Assemble STEP 4 and STEP 6 together using screw M6*60mm (R) And nut M6 (W)



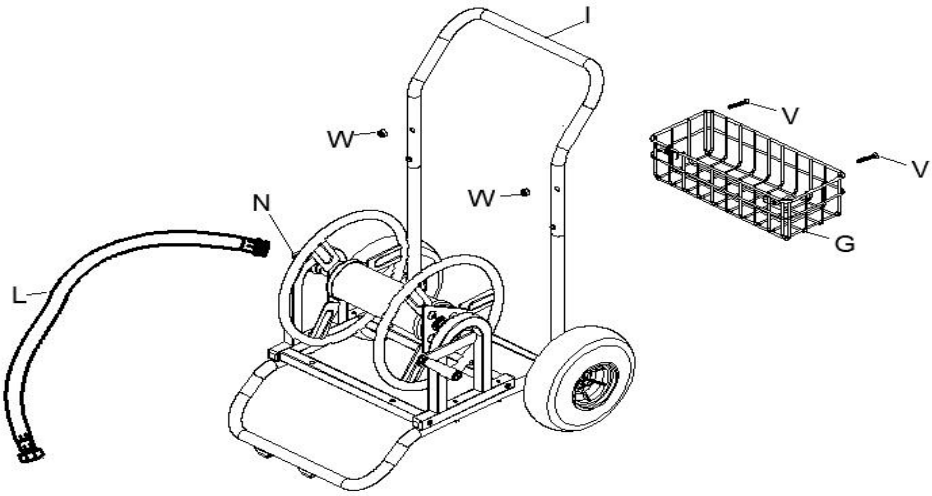Step8. Assemble Net basket (G) and putt (I) together using screw M6*40mm(V) and nut M6 (W).
Assemble Water pipe (L) and Waterpipe connector (N) together .



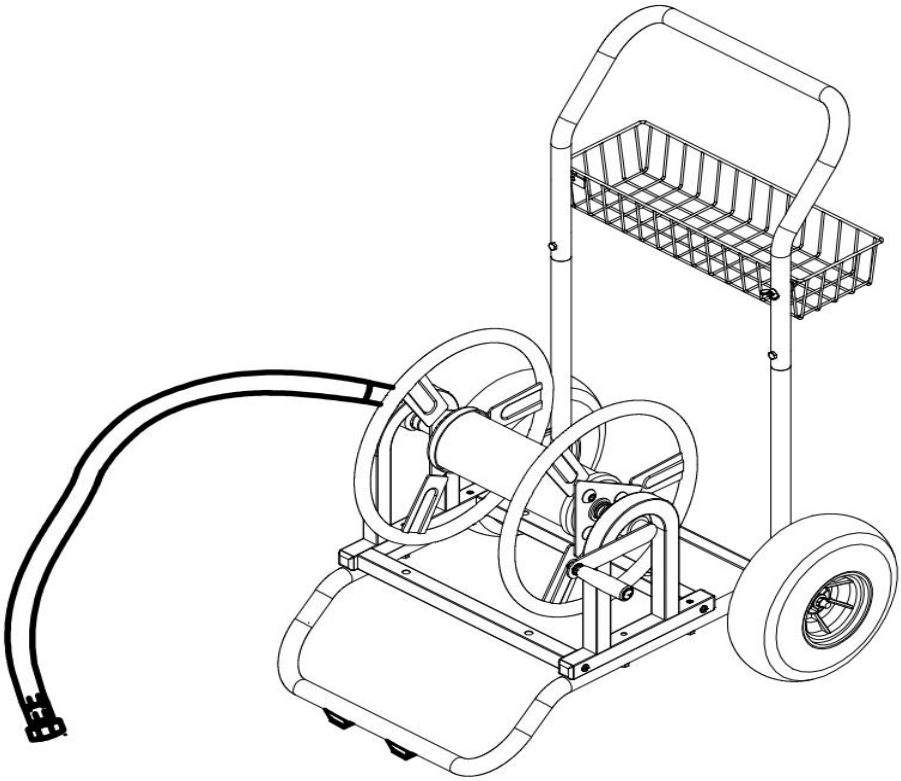Step 9.



Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

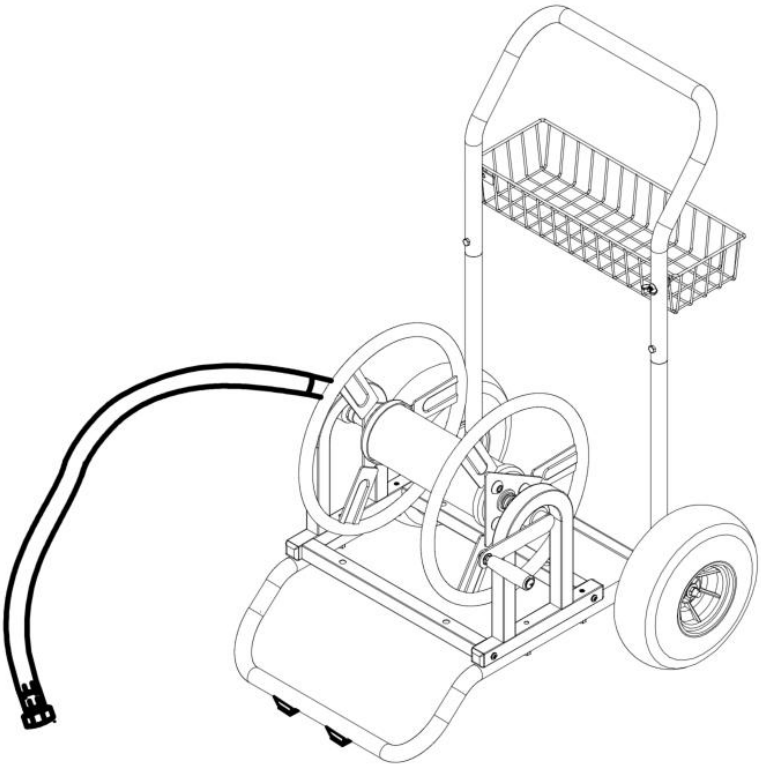
MODEL:ALQ-200-2

VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODEL:ALQ-200-2



This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This symbol, placed before a safety comment, indicates a kind of precaution, warning, or danger. Ignoring this warning may lead to an accident. To reduce the risk of injury, fire, or electrocution, please always follow the recommendation shown below.

Rules for Safe Operation

WARNING:

The following safety precautions are suggested. This Hose Reel Cart is designed, engineered and tested to offer reasonably safe and effective service, provided that it is operated in strict accordance with these instructions. Failure to do so may result in personal injury. Always observe the rules of safe operation.Please read and retain this manual.

1. Be alert for holes in the terrain and other hazards.
2. Follow maintenance and lubrication instructions as outlined in this manual.
3. Always wear substantial footwear.Do not wear loose fitting clothing that may get caught in moving parts.
4. DO NOT SIT OR STAND ON THIS ITEM.
5. This product is not a toy nor. Do not allow children to play with or near this item.
6. Use only on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Chest.
7. Use as intended only.
8. Inspect before every use; do not use if parts are loose or damaged.

ASSEMBLY PRECAUTIONS:

1.Assemble only according to these instructions. Improper assembly can create hazards.






2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3.Keep assembly area clean and well lit.
4.Keep bystanders out of the area during assembly.
5.Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6.Product capabilities apply to properly and completely assembled product only.
7.Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Pressure Washer Hose Reel Cart.




SAVE THESE INSTRUCTIONS





Model	ALQ-200-2
Maximum Capacity (5/8”Flexible Pipe)	200ft
Number of Wheels	2
Colour	Silver Gray

Carton Contents

Ref.	Description	Picture	QTY.
A1	Hose Reel -1		1
A2	Hose Reel -2		1

B	Drum		1
C	Left Bracket		1
D	Right Bracket		1
E	Horizontal Bar		2
F	Handle Rod		1
G	Net Basket		1
H	Front Outriggers		1


I	Putt		1
J	Support Pole		2
K	Wheel		2
L	Water Pipe		1
M	Axle		1
N	Water Pipe Connector		1
O	Three-way Connection		1
P	Handle		1

Q	Gasket		1
R	Screw M6*60		4
S	Screw M6*30		2
T	Screw M6*20		6
U	Screw M8*45		4
V	Screw M6*40		2
W	Nut M6		8
X	12mm Large Washer		2
Y	Nut M12		2


Assembly Instructions

Step1.Attach Hose reel-1(A1) and Hose reel -2(A2) and drum (B) together

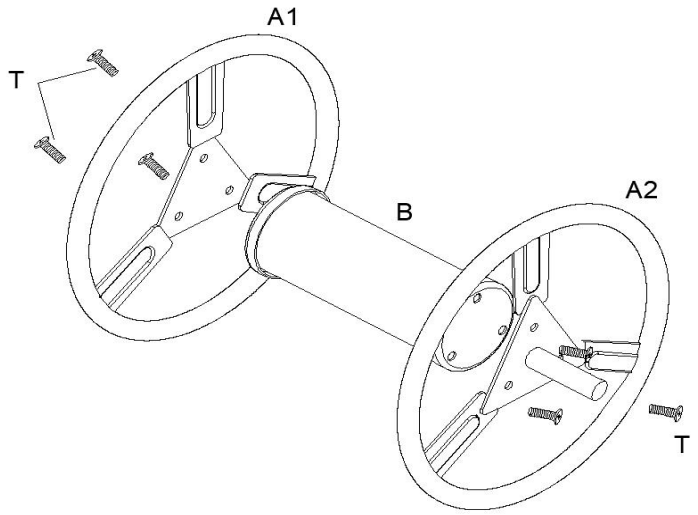with Screw M6*15mm bolts (T)




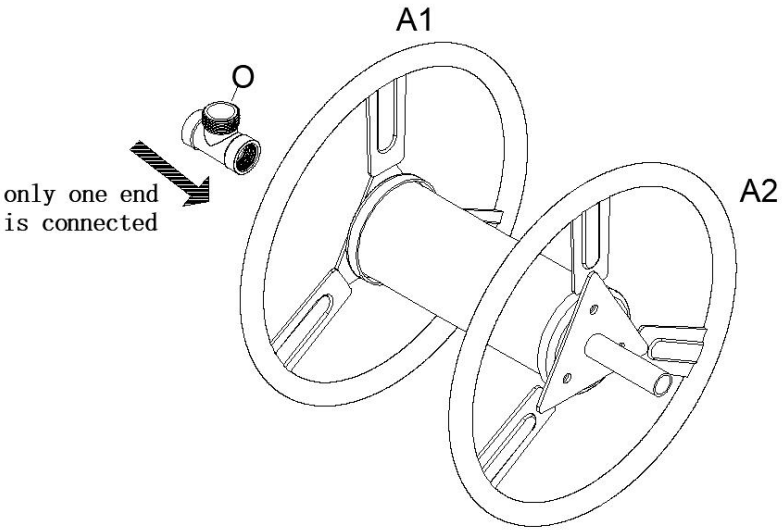Step 2.Assemble Three-way CONNECTOR (o) to the Hose Reel-1 (A1)




Step 3.Insert hose reel (A2) of the accessory into the ringht brabcket (D)
Attach left bracket (C) and right bracket (D) and horizontal bar (E) together

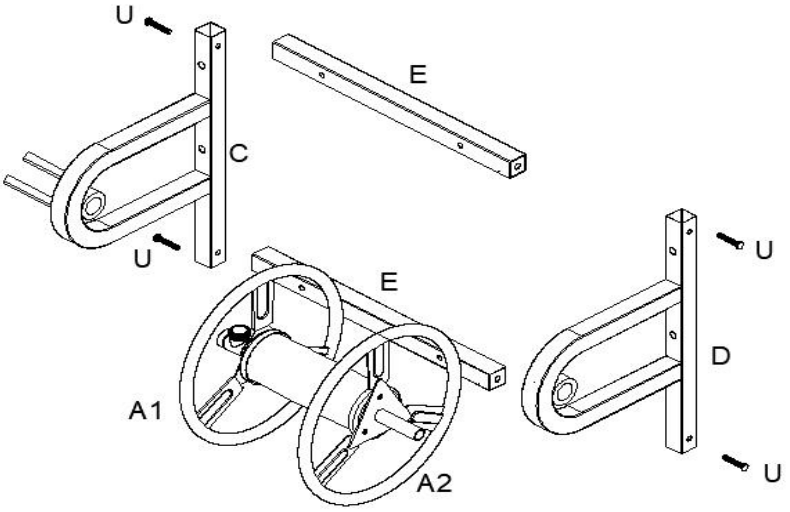
with screw M8*45mm bolts (U).



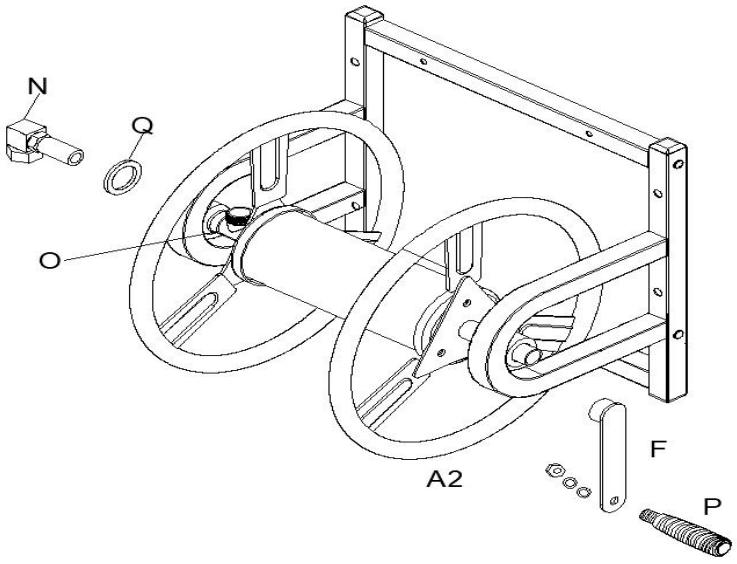
Step 4.Assemble gasket (Q) and water pipe connector (N) and hose reel (A1) onto three-way connection (O).
Assemple Handle rod (F) onto hose reel (A2).Attach Handle W/bolt (P) to Crank handle using handle bolt.



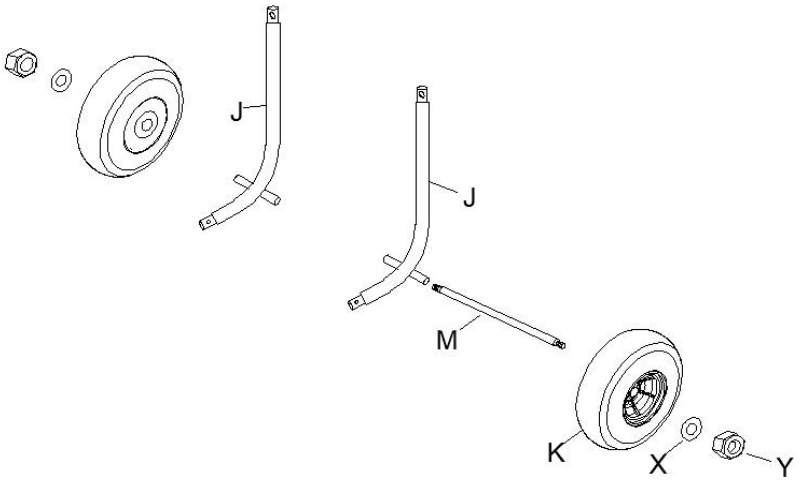
Step 5.Slide axles (M) through tabs on the bottom of support pole (J)
Install wheel (K) using 12mm large washer (X) and nut M12 (Y)



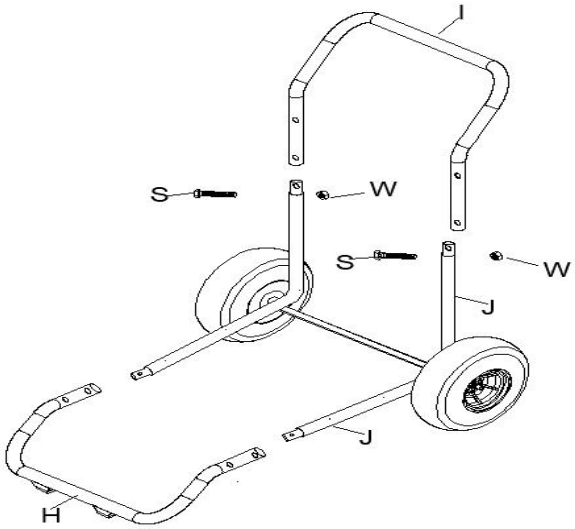
Step 6.Attach Putt (I) and Support Pole (J) together with Screw M6*30mm bolt (S) and nut M6(W).
Attach Front outriggers (H) and Support Pole (J) together.



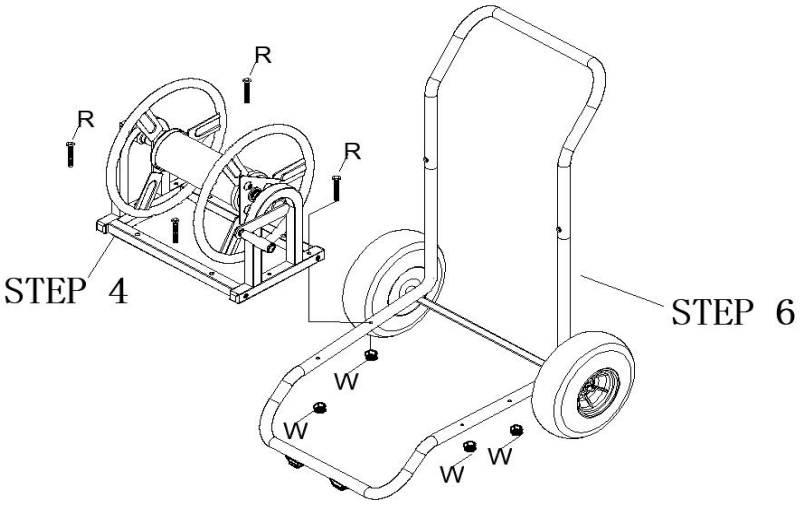
Step 7.Assemble STEP 4 and STEP 6 together using screw M6*60mm (R) And nut M6 (W)



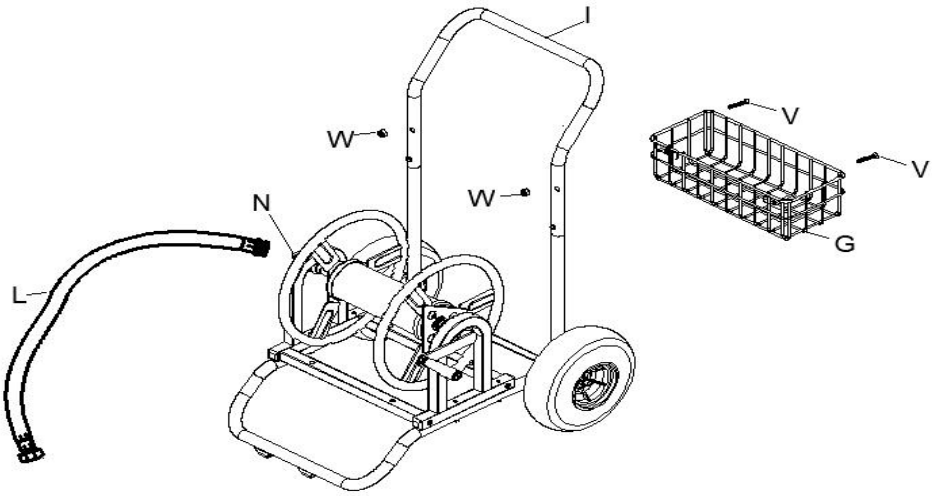Step8. Assemble Net basket (G) and putt (I) together using screw M6*40mm(V) and nut M6 (W).
Assemble Water pipe (L) and Waterpipe connector (N) together .



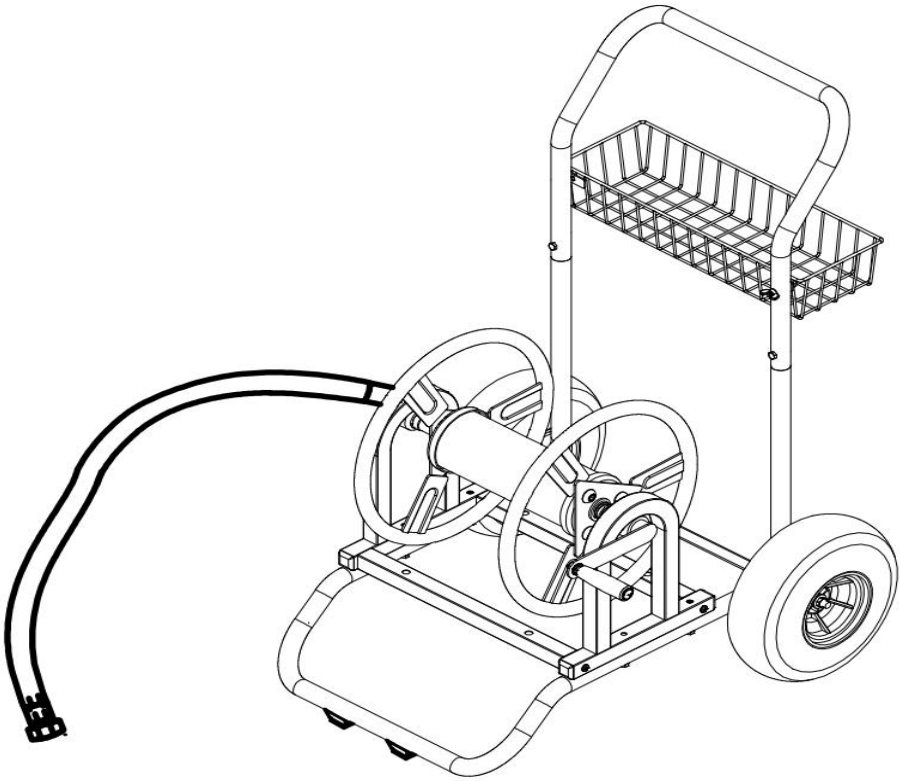Step 9.



Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Affordable. Reliable. Home Improvement.

WATERSLANGHASPELWAGEN

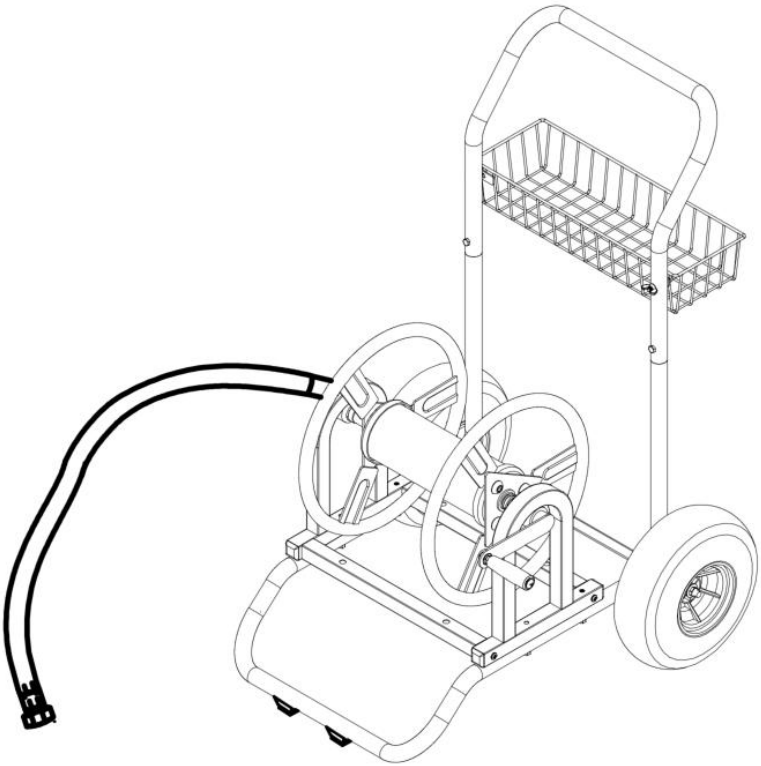
MODEL: ALQ-200-2

VEVOR

Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODEL: ALQ-200-2



Dit is de originele handleiding. Lees alle instructies zorgvuldig door voordat u het product gebruikt. VEVOR behoudt zich het recht voor om de gebruiksaanwijzing duidelijk te interpreteren. Het uiterlijk van het product is afhankelijk van het product dat u hebt ontvangen. Neemt u het ons niet kwalijk dat we u niet meer op de hoogte stellen van eventuele technologische of software-updates voor ons product.

	Waarschuwing: om het risico op letsel te verminderen, moet de gebruiker de gebruiksaanwijzing zorgvuldig lezen.
	Dit symbool, geplaatst vóór een veiligheidsopmerking, duidt op een voorzorgsmaatregel, waarschuwing of gevaar. Het negeren van deze waarschuwing kan leiden tot een ongeval. Volg altijd de onderstaande aanbeveling om het risico op letsel, brand of elektrocutie te verminderen.

Regels voor veilige bediening

WAARSCHUWING:

De volgende veiligheidsmaatregelen worden aanbevolen. Deze slanghaspelwagen is ontworpen, ontwikkeld en getest om redelijk veilige en effectieve oplossingen te bieden dienst, op voorwaarde dat deze strikt in overeenstemming met deze voorwaarden wordt uitgevoerd. instructies. Als u dit niet doet, kan dit leiden tot persoonlijk Let op letsel. Altijd observeren de regels van veilig operatie.Alstublieft lezen En behouden deze handleiding.

1. Wees alert op gaten in het terrein en andere gevaren.
2. Volg de onderhouds- en smeerinstructies zoals beschreven in deze handleiding.
3. Draag altijd stevig schoeisel. Draag geen losse kleding die vast kan komen te zitten in bewegende onderdelen.
4. NIET OP DIT ITEM ZITTEN OF STAAN.
5. Dit product is geen speelgoed. Laat kinderen niet met of in de buurt van dit artikel spelen.
6. Gebruik de kist alleen op een vlak, egaal, hard en glad oppervlak dat een volledig beladen kist veilig kan dragen.
7. Gebruik het product alleen zoals bedoeld.
8. Controleer het product voor elk gebruik. Gebruik het product niet als er onderdelen loszitten of beschadigd zijn.

MONTAGEVOORZORGSMAATREGELEN:




1. Monteer uitsluitend volgens deze instructies. Onjuiste montage kan gevaarlijk zijn.
2. Draag tijdens de montage een ANSI-goedgekeurde veiligheidsbril en stevige werkhandschoenen.
3. Zorg ervoor dat de verzamelplaats schoon en goed verlicht is.
4. Houd omstanders uit de buurt tijdens de montage.
5. Niet in de winkel komen als u moe bent of onder invloed van alcohol, drugs of medicijnen.
6. De producteigenschappen gelden alleen voor producten die correct en volledig zijn gemonteerd.
7. Monteer de set op een vlak, egaal, hard en glad oppervlak dat een volledig beladen hogedrukreinigerslanghaspelwagen veilig kan dragen.





BEWAAR DEZE INSTRUCTIES





Model	ALQ-200-2
Maximale capaciteit (5/8 ” flexibele leiding)	200 voet
Aantal wielen	2
Kleur	Zilvergrijs

Karton Inhoud

Referentie.	Beschrijving	Afbeelding	AANTAL
A1	Slanghaspel -1		1

A2	Slanghaspel -2		1
B	Trommel		1
C	Linkerbeugel		1
D	Rechterbeugel		1
E	Horizontale balk		2
F	Handvatstang		1
G	Nettomand		1


H	Voorste steunpoten		1
I	Putt		1
J	Steunpaal		2
K	Wiel		2
L	Waterpijp		1
M	As		1
N	Waterleidingconnector		1

O	Driewegverbinding		1
P	Hendel		1
Q	Pakking		1
R	Schroef M6*60		4
S	Schroef M6* 30		2
T	Schroef M6* 20		6
Jij	Schroef M8 * 45		4
V	Schroef M6* 40		2
W	Moer M6		8
X	12 mm grote ring		2


Ja	Moer M 12		2

Montage-instructies

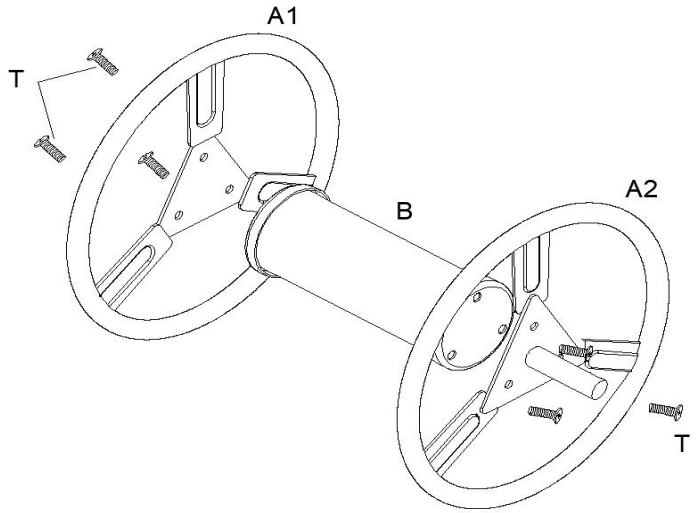
Stap 1. Bevestig de slanghaspel-1 (A1) en de slanghaspel-2 (A2) en de trommel (B) samen met de bouten M6*15mm (T)



Stap 2. Monteer de driewegconnector (o) op de slanghaspel-1 (A1)

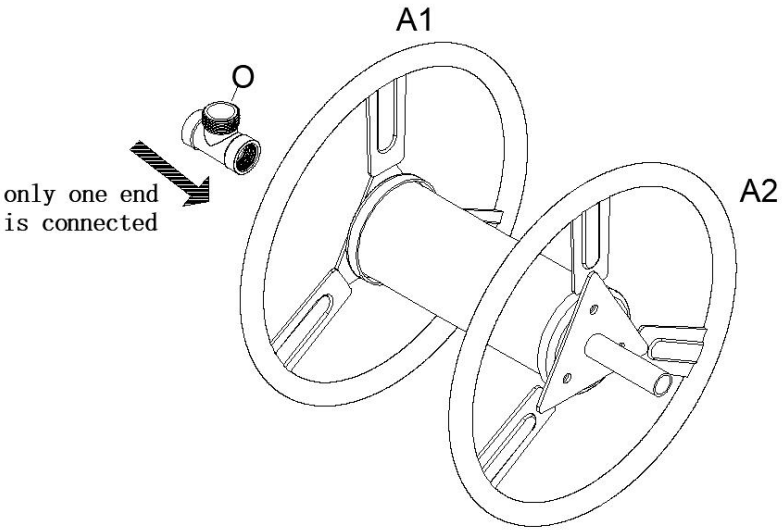


Stap 3. Steek de slanghaspel (A2) van het accessoire in de ringbeugel (D) Bevestig de linkerbeugel (C), rechterbeugel (D) en de horizontale balk (E) aan elkaar met behulp van bouten M8*45mm (U).

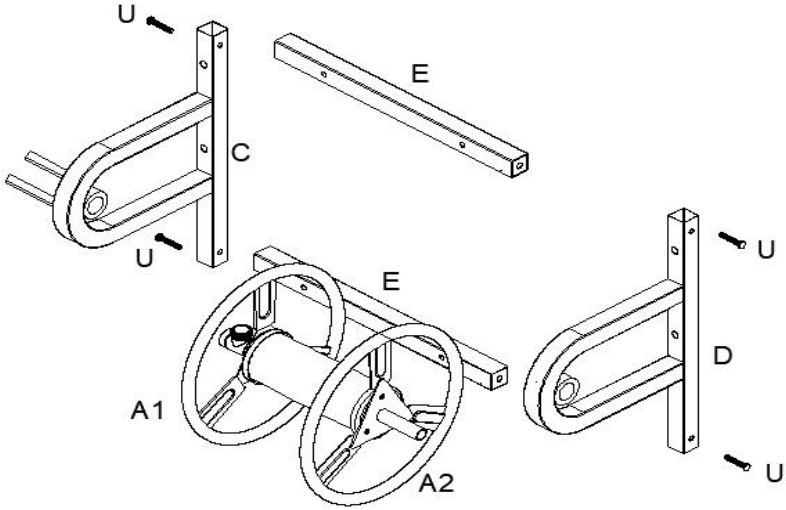


Stap 4. Monteer de pakking (Q), de waterleidingaansluiting (N) en de

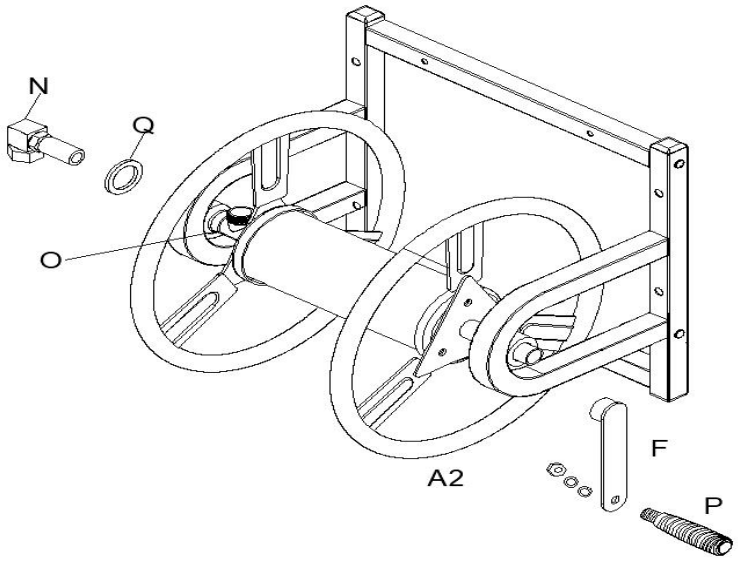
slanghaspel (A1) op de driewegaansluiting (O).
Monteer de handgreepstang (F) op de slanghaspel (A2). Bevestig de handgreep met bout (P) aan de krukhandgreep met behulp van de handgreepbout.



Stap 5. Schuif de assen (M) door de lipjes aan de onderkant van de steunpaal (J)
Monteer het wiel (K) met behulp van een 12 mm grote ring (X) en een moer M12 (Y)

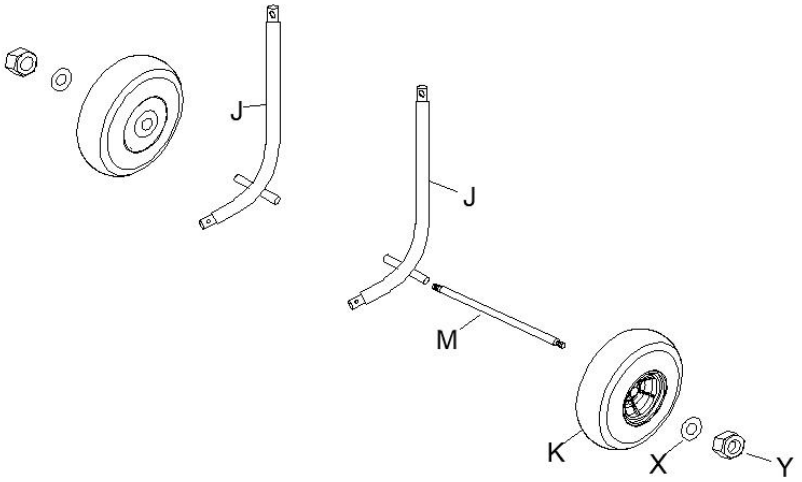


Stap 6. Bevestig Putt (I) en steunpaal (J) samen met schroef M6*30mm bout (S) en moer M6(W).
Bevestig de voorste steunpoten (H) en de steunpaal (J) aan elkaar.

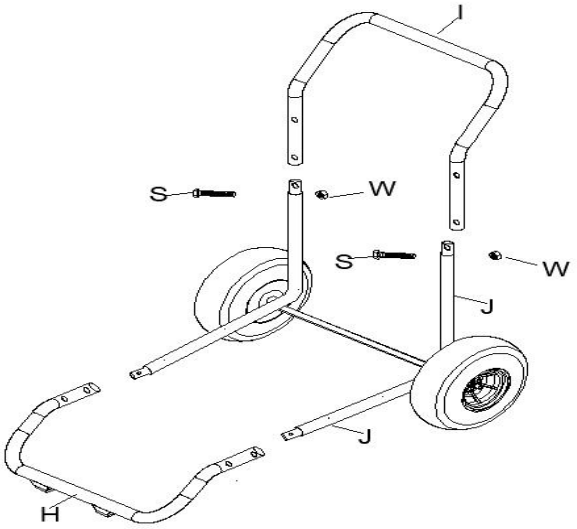


Stap 7. Monteer STAP 4 en STAP 6 samen met behulp van schroef M6*60mm (R)

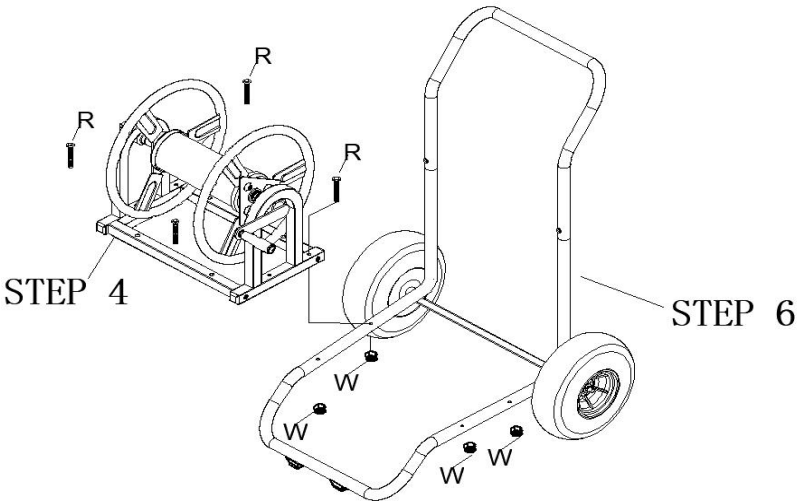
En moer M6 (W)



Stap 8. Monteer de netmand (G) en putt (I) aan elkaar met behulp van de schroef M6*40mm (V) en de moer M6 (W).
Monteer de waterleiding (L) en de waterleidingaansluiting (N) aan elkaar.

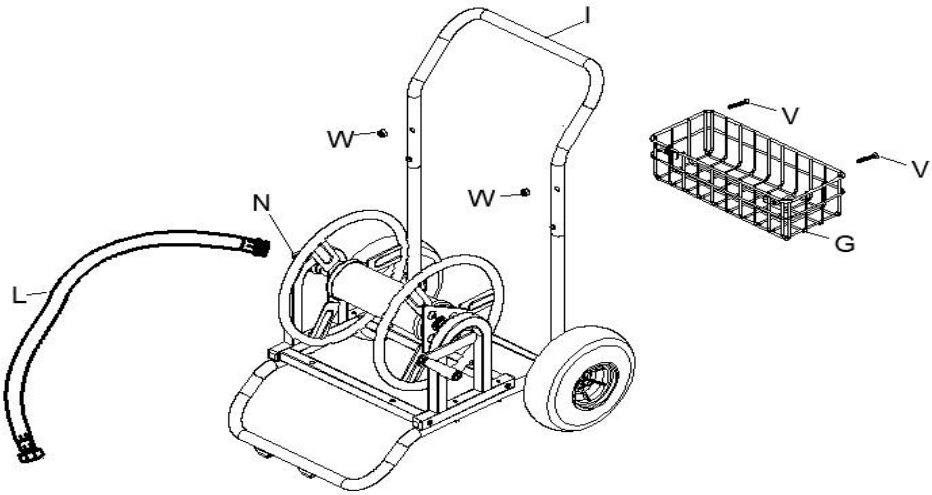

Stap 9.

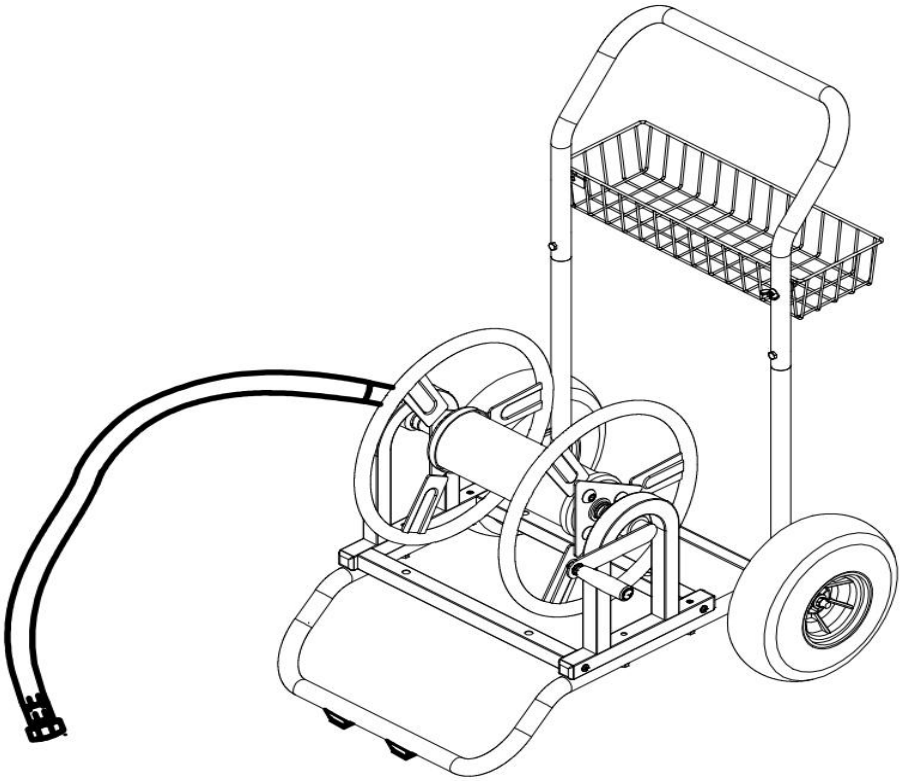

Fabrikant: Shanghaimuxinmuyeyouxiangongsi
Adres: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Geïmporteerd naar AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD
NSW 2122 Australië
Geïmporteerd naar de VS: Sanven Technology Ltd. Suite 250, 9166 Anaheim
Plaats, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Affordable. Reliable. Home Improvement.

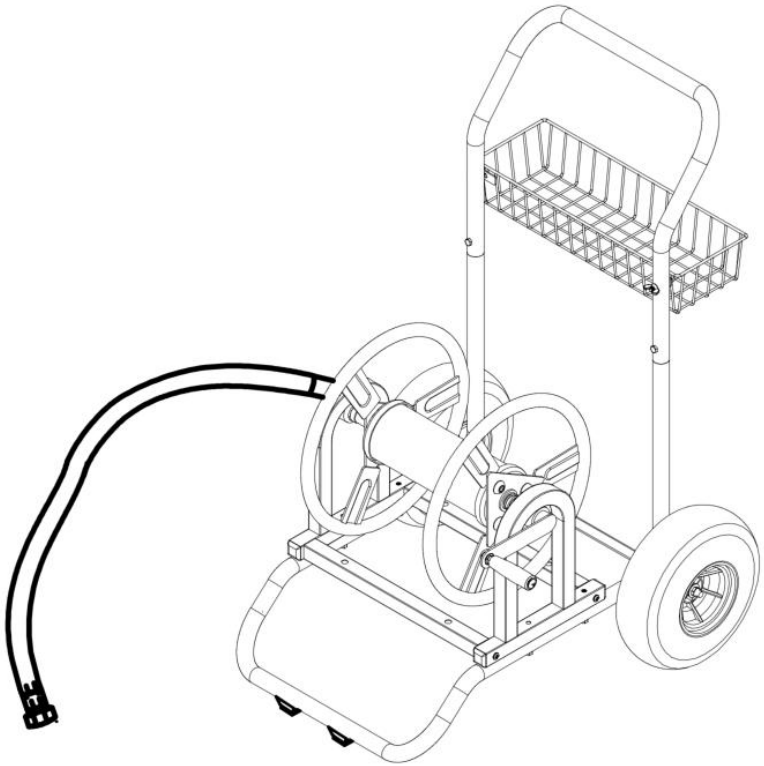
VATTENSLANGSVAGN

MODELL: ALQ-200-2

VEVOR
Affordable. Reliable. Home Improvement.

WATER HOSE REEL CART

MODELL: ALQ-200-2



Detta är originalinstruktionerna, vänligen läs alla instruktioner noggrant innan du använder produkten. VEVOR förbehåller sig en tydlig tolkning av vår användarmanual. Produktens utseende ska vara beroende av den produkt du mottagit. Vi ber om ursäkt för att vi inte kommer att informera dig igen om det finns några teknik- eller programuppdateringar för vår produkt.

	Varning – För att minska risken för skador måste användaren läsa instruktionsmanualen noggrant.
	Denna symbol, som placeras före en säkerhetsanmärkning, indikerar en typ av försiktighetsåtgärd, varning eller fara. Att ignorera denna varning kan leda till en olycka. För att minska risken för skada, brand eller elchock, följ alltid rekommendationerna nedan.

Regler för säker drift

VARNING:

Följande säkerhetsåtgärder föreslås. Denna slangvinda är designad, konstruerad och testad för att erbjuda rimligt säkra och effektiva tjänsten, förutsatt att den drivs i strikt enlighet med dessa instruktioner.
Underlåtenhet att göra detta kan leda till personlig skada. Observera alltid de regler av säker operation. Vänligen läsa och behålla den här manualen.

1. Var uppmärksam på hål i terrängen och andra faror.
2. Följ instruktionerna för underhåll och smörjning enligt denna manual.
3. Använd alltid rejäla skor. Använd inte löst sittande kläder som kan fastna i rörliga delar.
4. SITTA ELLER STÅ INTE PÅ DENNA FÖRENING.
5. Denna produkt är inte en leksak. Låt inte barn leka med eller i närheten av denna produkt.
6. Använd endast på en plan, jämn, hård och slät yta som säkert kan bära en fullastad kista.
7. Använd endast enligt avsikten.
8. Kontrollera före varje användning; använd inte om delar är lösa eller skadade.

MONTERINGSÅTGÄRDER:

1. Montera endast enligt dessa instruktioner. Felaktig montering kan skapa





risker.
2. Använd ANSI-godkända skyddsglasögon och kraftiga arbetshandskar under monteringen.
3. Håll samlingsområdet rent och väl upplyst.
4. Håll åskådare borta från området under monteringen.
5. Montera inte när du är trött eller påverkad av alkohol, droger eller mediciner.
6. Produktegenskaperna gäller endast korrekt och fullständigt monterade produkter.
7. Montera på en plan, jämn, hård och slät yta som säkert kan bära en fullastad slangvinda för högtryckstvätt.




SPARA DESSA INSTRUKTIONER





Modell	ALQ-200-2
Maximal kapacitet (5/8 ” flexibelt rör)	200 fot
Antal W - klackar	2
Färg	Silvergrå

Kartong Innehåll

Ref.	Beskrivning	Bild	ANTAL
A1	Slangvinda -1		1
A2	Slangvinda -2		1

B	Trumma		1
C	Vänster parentes		1
D	Höger parentes		1
E	Horisontell stång		2
F	Handtagsstång		1
G	Nätkorg		1
H	Främre stödben		1


Jag	Putta		1
J	Stödstång		2
K	Hjul		2
L	Vattenrör		1
M	Axel		1
N	Vattenrörskoppling		1
O	Trevägsanslutning		1
P	Hantera		1

Q	Packning		1
R	Skruva M6*60		4
S	Skruva M6* 30		2
T	Skruva M6* 20		6
Du	Skruva M 8 * 45		4
V	Skruva M6* 40		2
V	Mutter M6		8
X	12 mm stor bricka		2
Y	Mutter M 12		2


Monteringsanvisningar

Steg 1. Fäst slangvindan-1 (A1) och slangvindan -2 (A2) och trumman (B)

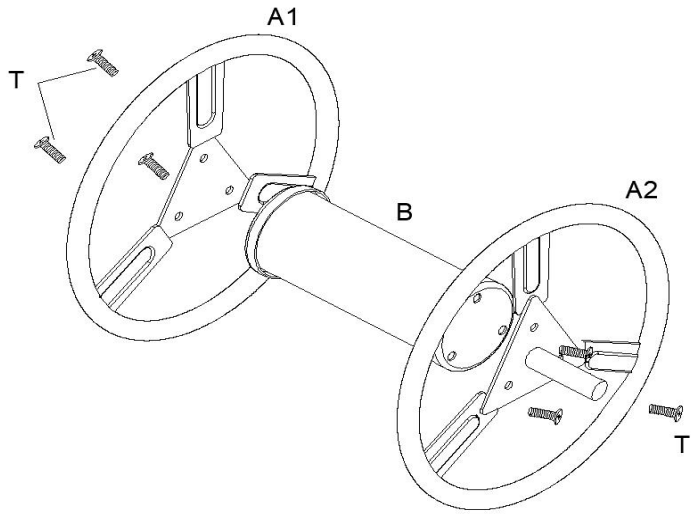tillsammans med M6*15mm-bultar (T)




Steg 2. Montera trevägskopplingen (o) på slangvindan-1 (A1)

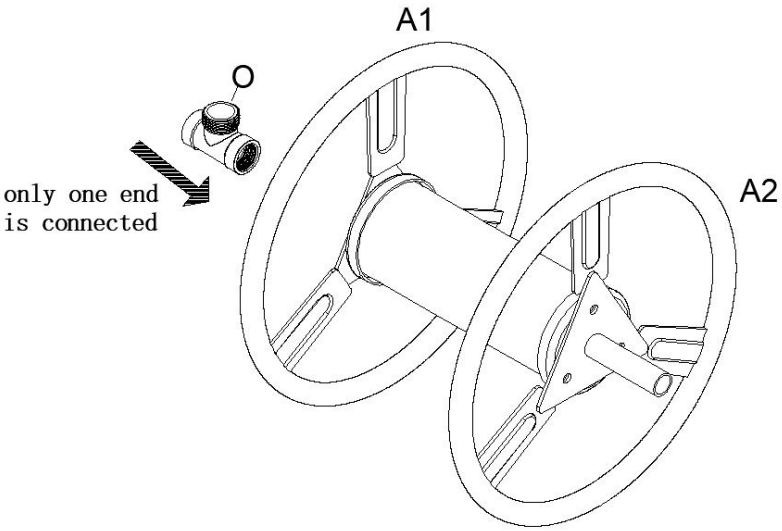


Steg 3. Sätt i tillbehörets slangvinda (A2) i ringfästet (D)
Fäst vänster fäste (C) och höger fäste (D) samt den horisontella stången

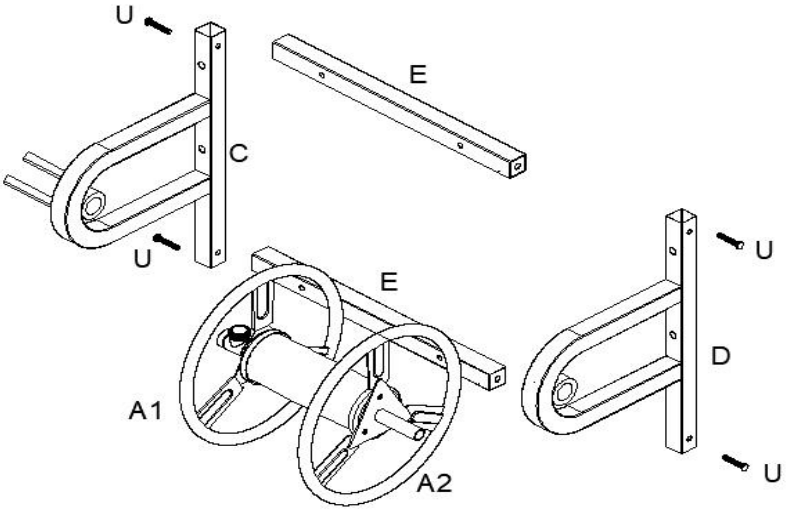
(E) tillsammans med M8*45mm-bultar (U).




Steg 4. Montera packningen (Q) och vattenrörskopplingen (N) och slangvindan (A1) på trevägsanslutningen (O).
Montera handtagsstången (F) på slangvindan (A2). Fäst handtaget med bult (P) på veven med hjälp av handtagsbulten.

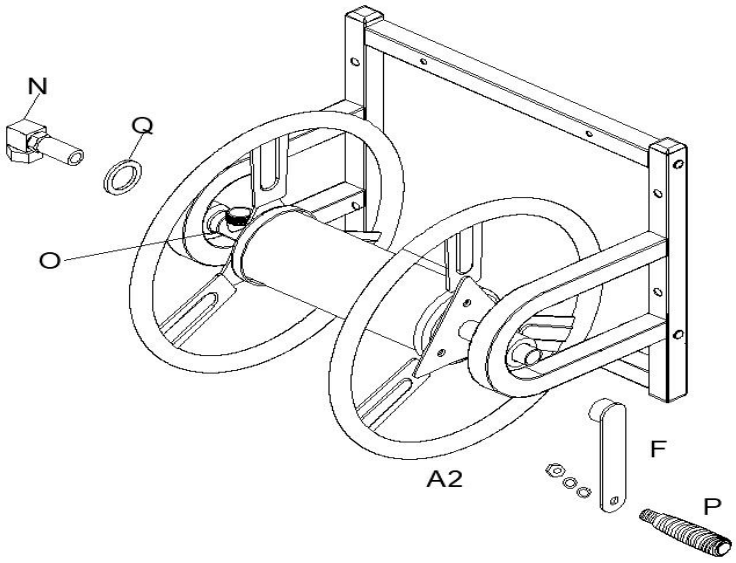


Steg 5. Skjut axlarna (M) genom flikarna på undersidan av stödstången (J)
Montera hjulet (K) med en 12 mm stor bricka (X) och en M12-mutter (Y)

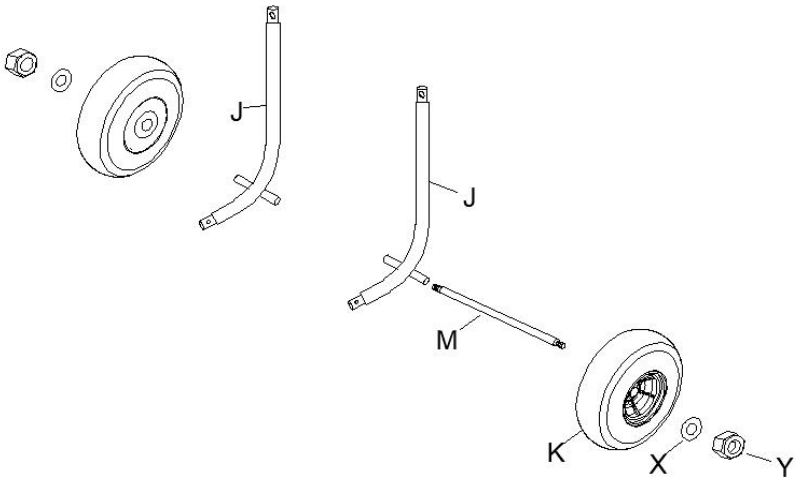


Steg 6. Fäst putten (I) och stödstången (J) tillsammans med skruv M6*30 mm (S) och mutter M6 (W).
Fäst de främre stödbenen (H) och stödstången (J) tillsammans.

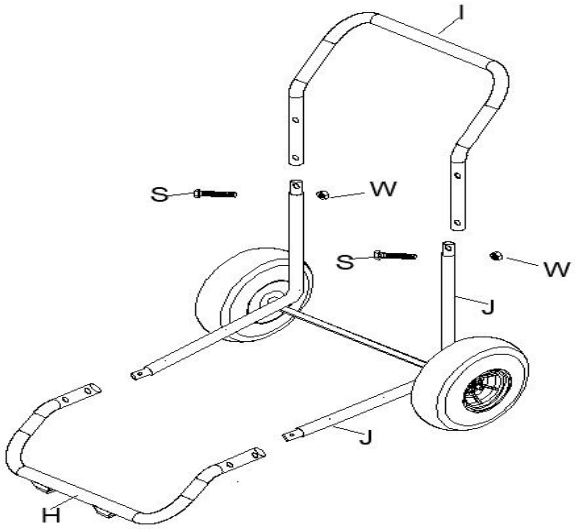


Steg 7. Montera STEP 4 och STEP 6 med hjälp av skruv M6*60mm (R) Och mutter M6 (W)

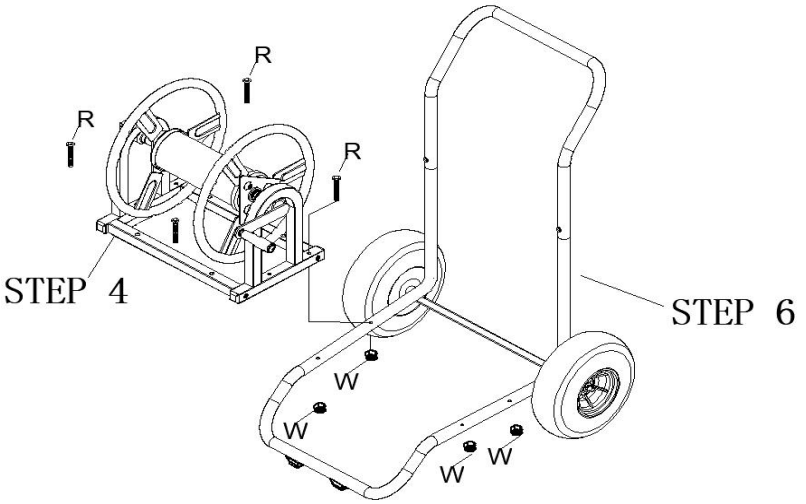

Steg 8. Montera ihop nätkorgen (G) och putt (I) med skruv M6*40mm (V) och mutter M6 (W).
Montera vattenröret (L) och vattenrörskopplingen (N) tillsammans.

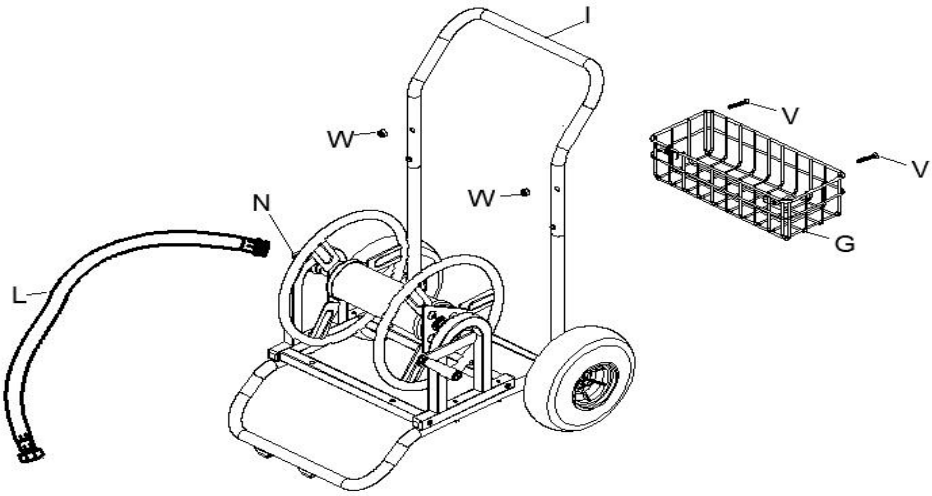

Steg 9.

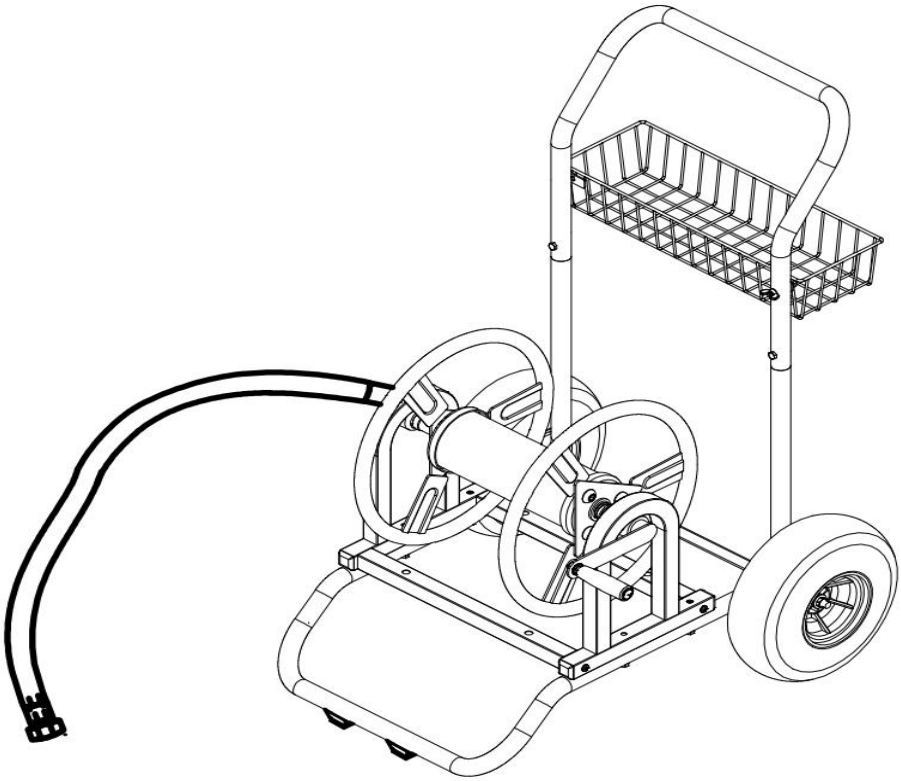

Tillverkare: Shanghaimuxinmuyeyouxiangongsi
Adress: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghai 200 000 kanadensiska republiken.
Importerad till Australien: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD
NSW 2122 Australien
Importerad till USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Plats, Rancho Cucamonga, Kalifornien 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.

