

Technical Support and E-Warranty Certificate www.vevor.com/support

FISHING CART

MODEL: YK-300

We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.



FISHING CART

MODEL: YK-300



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

SAFETY INSTRUCTIONS

- 1. Please confirm that the cart is intact and the tire pressure is normal before each use. Please inflate a little before using the wheels, and be careful not to over-inflate! Maximum inflation pressure 2-3psi, the maximum diameter of the wheel after inflation should not exceed 33cm (13-inch)!
- 2. It is forbidden to carry people under any condition.
- 3. It is forbidden to load articles on uneven and hilly terrains.
- 4. Overload is strictly prohibited.
- 5. Don't move too fast when passing pothole areas.


MODEL AND PARAMETERS

Model	YK-300			
Max. Load	300lbs			
Wheels	13inch(After Inflated size), inflatable, PU wheels*2			
Fishing Rod Barrel	8			
Frame Size (inside)	34 x 14.5 x 7inch			
Material	Aluminium alloy			
Color	White			

STRUCTURE DIAGRAM



INSTALLATION

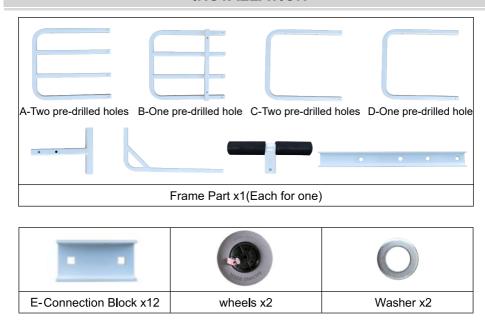













Step 1: Connect the two lower frames together using the M5x35 bolts and the connection block.

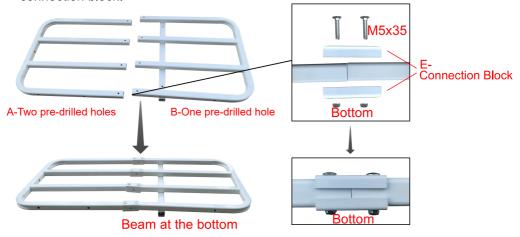


Step 2: Attach the upper frame in the same manner.




Step 3: Mounting the frame.

NOTE: The frames have pre-drilled holes for mounting the fishing barrels. The number of pre-drilled holes on the upper and lower frames on the same side should be the same.

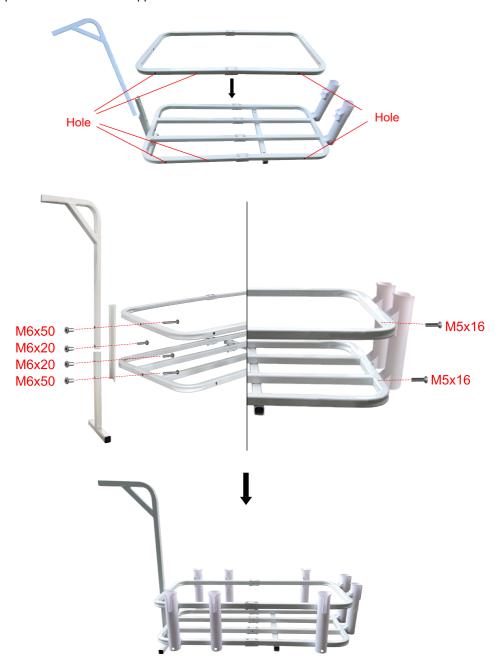

Step 4: Install all rod barrels, then wheels.

NOTE: Please inflate the wheels before installation.




Connect the 2 plates from head to end to make a circle.



Insert the wheel into the jig.Inflate the balloon wheel with your pump.




Finish inflaing when wheel diameter is same as inner diameter of the jig.

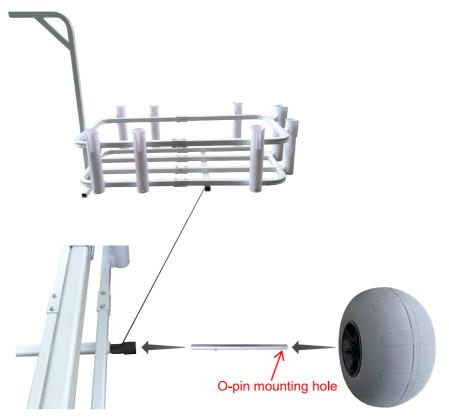


NOTE: Insert the plastic parts of the wheel axle into the ends of the bottom cross member of the frame, then insert the wheel axle, and finally install the wheel on it.

Step 5: Put in the washer first, then insert the O-pin.





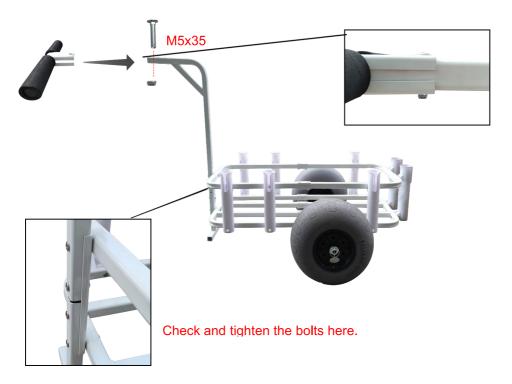

Step6: Installation complete.

MAINTENANCE

- 1. Clean the surface after each use .
- 2. Please check and confirm that the cart is intact and the tire pressure is normal before each use.
- 3. Check that the bolts are tight.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu,

shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD

NSW 2122 Australia

Imported to USA: Sanven Technology Ltd, Suite 250, 9166 Anaheim

Place, Rancho Cucamonga, CA 91730

EC REP

E-CrossStu GmbH.
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK REP

YH CONSULTING LIMITED.

C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX



Technical Support and E-Warranty Certificate www.vevor.com/support