

Technical Support and E-Warranty Certificate www.vevor.com/support

FISHING CART MODEL: YK-600

We continue to be committed to provide you tools with competitive price. "Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.



FISHING CART

MODEL: YK-600



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.


SAFETY INSTRUCTIONS

1. Please confirm that the cart is intact and the tire pressure is normal before each use. Please inflate a little before using the wheels, and be careful not to over-inflate! Maximum inflation pressure 25psi, the maximum diameter of the wheel after inflation should not exceed 29cm! (11.4-inch)

- 2. It is forbidden to carry people at any condition.
- 3. It is forbidden to load articles on uneven and hilly terrains.
- 4. Overload is strictly prohibited.
- 5. Don't move too fast when passing potholes areas.

Model	YK-600	
Max. Load	550 lbs	
Wheels	11inch,inflatable,rubber wheels*4	
Fishing Rod Barrel	8	
Frame Size (inside)	30.9 x 18.5 x 16.3inch	
Material	Steel & Aluminium alloy	
Color	Green	

MODEL AND PARAMETERS

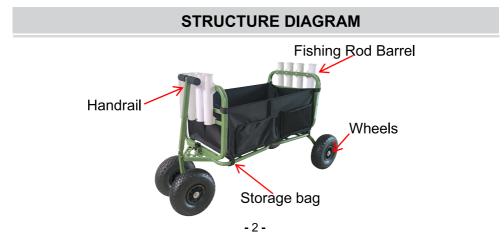

INSTALLATION

Frame Part x1(Each for one)	

		0
Fishing Rod Barrel x8	Wheels x4	Spring Washer x4

¢		
M12x90 Screw x4	M6x25 Bolts x9	M6x15 Bolt x9
	(Need eight, one more)	(Need eight, one more)

	>	\sim
M6x35 Bolts x1	17-19mm Wrench x1	8-10mm Wrench x1

Hex Wrench x2	User Manual x1	

Step 1: Open the frame. There is a fixing at each end of the frame, tighten it.



Step 2: Install the front and rear four wheels.







Install the screws and spacers, being careful not to tighten the screws too much.




When installing, please note that the side of the wheel with the inflatable valve core is displayed facing outward.



Step 3: Mounting the handle.



Step 4: Install all rod barrels, then wheels.





Tighten the screws with a wrench, please note that do not over-tighten them.



Step 5: Unfold the bag, which has 8 Velcro straps for attaching the bag to the frame.



Step 6: Installation complete and pump up the tire before use.

- 1. Clean the surface after each use .
- 2. Please check and confirm that the cart is intact and the tire pressure is normal before each use.
- 3. Check that the bolts are tight.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd, Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730



E-CrossStu GmbH.

Mainzer Landstr.69, 60329 Frankfurt am Main.



YH CONSULTING LIMITED.

C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX



Technical Support and E-Warranty Certificate www.vevor.com/support