

Technical Support and E-Warranty Certificate www.vevor.com/support

# PRESSURE WASHER HOSE REEL CART MODEL:GT0707A

We continue to be committed to provide you tools with competitive price. "Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.



PRESSURE WASHER HOSE REEL CART

#### MODEL:GT0707A



#### **NEED HELP? CONTACT US!**

Have product questions? Need technical support? Please feel free to contact us: **Technical Support and E-Warranty Certificate** www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.



Warning-To reduce the risk of injury, user must read instructions manual carefully.

This symbol, placed before a safety comment, indicates a kind of precaution, warning, or danger. Ignoring this warning may lead to an accident. To reduce the risk of injury, fire, or electrocution, please always follow the recommendation shown below.

# **A** Rules for Safe Operation

#### WARNING:

The following safety precautions are suggested. This Hose Reel Cart is designed, engineered and tested to offer reasonably safe and effective service, provided that it is operated in strict accordance with these instructions. Failure to do so may result in personal injury. Always observe the rules of

safe operation.Please read and retain this manual.

1. Be alert for holes in the terrain and other hazards.

2. Follow maintenance and lubrication instructions as outlined in this manual.

3. Always wear substantial footwear.Do not wear loose fitting clothing that may get caught in moving parts.

4. DO NOT SIT OR STAND ON THIS ITEM.

5. This product is not a toy nor. Do not allow children to play with or near this item.

6. Use only on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Chest.

7. Use as intended only.

8. Inspect before every use; do not use if parts are loose or damaged.

### **ASSEMBLY PRECAUTIONS:**

1.Assemble only according to these instructions. Improper assembly can create hazards.

2. Wear ANSI-approved safety goggles and heavy-duty work gloves during

assembly.

3.Keep assembly area clean and well lit.

4.Keep bystanders out of the area during assembly.

5.Do not assemble when tired or when under the influence of alcohol, drugs or medication.

6.Product capabilities apply to properly and completely assembled product only.

7.Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Pressure Washer Hose Reel Cart.

#### SAVE THESE INSTRUCTIONS

Model	GT0707A
Maximum Capacity (5/8"Flexible Pipe)	250ft
Number of Wheels	4
Colour	Silver gray

#### **Carton Contents**

Ref.	Description	Picture	QTY.
1	Side Frame	$\square$	2
2	Cross Brace		1
3	Axle		2
4	Wheels		4
5	Hose Reel Ends	$\bigcirc$	2

6	Push Handle	$\bigcap$	1
7	Hose Reel Center Hub		1
8	Water Coupling Tube	~~~{ <u>}</u>	1
9	Crank Handle		1
10	Hose Extension		1
11	Wire Basket		1
12	Painted Water Coupler U-Bracket	A	1
13	Crank U-Bracket		1
14	Crank Bracket Bushing	0	1
15	Hose Washer	Ο	2
16	M6 x 35 Bolt	P	14
17	M6 x 30 Bolt		2
18	M5 x 15 Screws		13
19	Cotter Pin	8	4
20	12mm Large Washer	0	4
21	6mm Small Washer	Ö	16

22	M6 Lock Nuts		16
23	Front Crank Frame	$\bigcap$	1
24	M5 Small Washer	0	13


# **Assembly Instructions**

#### **Tools Needed for Cart Assembly**

(1) Screwdriver.

(1) M10 Wrench or Adjustable Wrench.

1. Install front crank frame to side frames using two M6 X 35 bolt sets. Next add cross brace to side frame using four M6 x 35 Bolt Sets. Slide axles through tabs on the bottom of side frames. See figure 1.

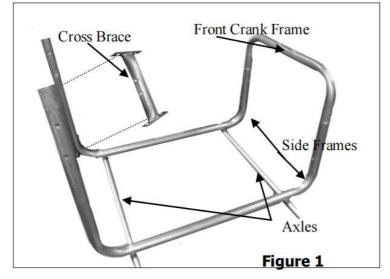

2. Install wheels using 12mm large washer and cotter pin.


See figure 2.



3. Attach hose reel end to the center hub using (6) M5 x 15 screws. repeat opposite side. See figure 3A.


Find the end of the center hub with the extra threaded screw hole and insert water coupler tube through this end first.

Attach water coupler tube to the center hub using the painted water coupler U-Bracket & (2) M5\*15 screws . See figure 3B.

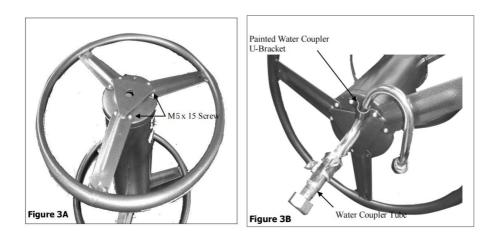


4. Insert crank bushing into crank U-Bracket and attach to the front crank

frame using (2) M6 x 35 Bolt Sets. Insert crank handle through the crank bushing then slide hose reel onto crank handle securing with (2) M6 x 30 bolt sets. See figure 4.




5.Attach opposite end of the hose reel to the cross brace using (2) M6 x 35 bolt sets. See figure 5.




6. Assemble push handle onto cart frame using (2) M6x35 bolt sets. See figure 6.




7. Attach basket to handle using (2) M6x35 bolt sets. See figure 7.

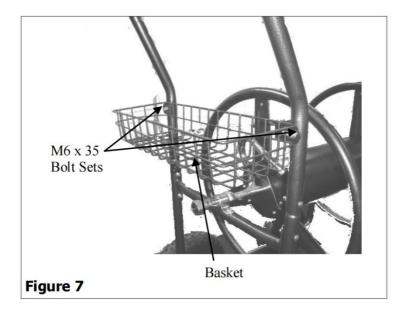

8. Insert rubber washers into hose extension and water coupler. See figure 8.



9. Attach hose extension to water coupler. See figure 9.

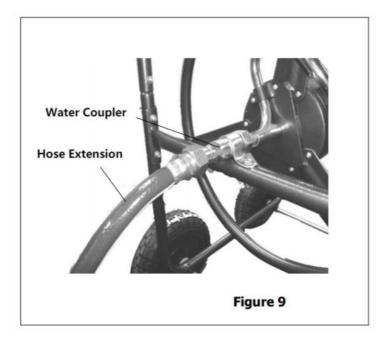

## Connect the water pipe



Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

**Imported to USA:** Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730



YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX



E-CrossStu GmbH Mainzer Landstr.69, 60329 Frankfurt am Main.



Technical Support and E-Warranty Certificate www.vevor.com/support