

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate www.vevor.com/support

DOOR SEALS KIT USER MANUAL

**MODEL:MH1925-20FT/MH1925-10FT/MH1925-16.5FT/
MH1925-12FT**

We continue to be committed to provide you tools with competitive price.


"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR[®]

TOUGH TOOLS, HALF PRICE

DOOR SEALS KIT

**MODEL: MH1925-20FT/MH1925-10FT/MH1925-16.5FT/
MH1925-12FT**

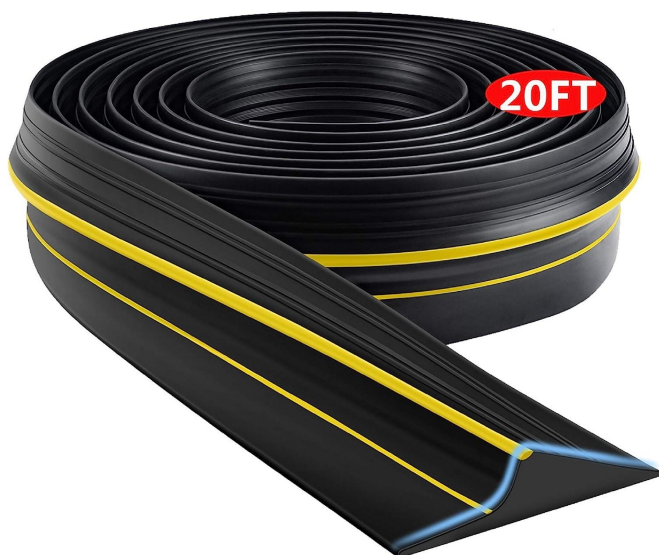

Note: The actual product you receive determines its look.

NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:
Technical Support and E-Warranty Certificate www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

WARNING!

Read this material before using this product. Failure to do so can result in serious injury.

1. This product is not a toy. Do not allow children to play with this item.
2. Use as intended only.

2. Product Introduce

The main material of the door sealing strip is rubber, which mainly solves the problems of the door is not sealed, dust, insects, outdoor noise, temperature insulation, heat preservation and other problems; It is mainly installed in three parts: the gap under the door, the gap between the door frame and the wall, and the gap between the door frame and the door. There will be different products for different opening ways of the door.

3.Accessories



Binding Agent

4.Operation Direction

1. Lay seal on floor in position under door, mark seal position on floor, and cut the seal to length.
2. The floor should be cleaned with a scrubbing brush and detergent and left to dry (any contamination on floor will compromise, performance of adhesive, i.e oil, grease or wax).

3. Close door with seal underneath it Fig.1, and position seal as shown on Fig.2. and Fig.3 and mark the floor for location of seal.
- 4.Apply glue to the sealing position of the bottom plate in Figure 3, and then install the seals.

FIGURE 1


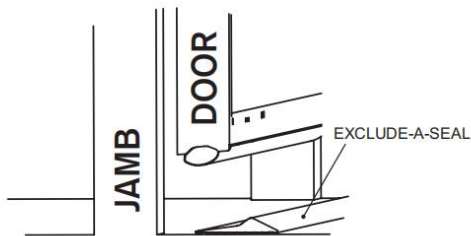


FIGURE 2




SIDE VIEW

FIGURE 3



TOP VIEW

Sketch map:

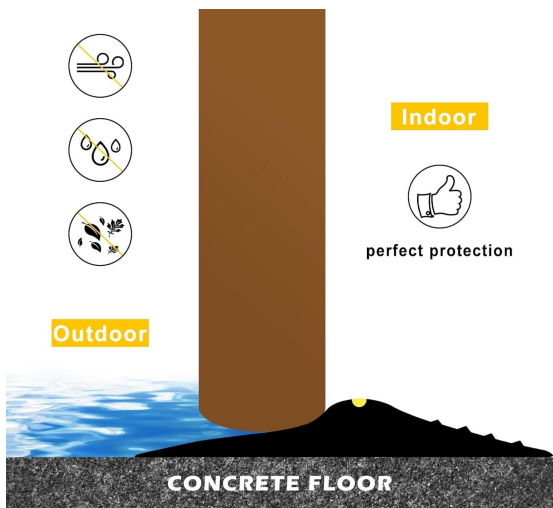

5.Parameter

	Items	Description
1	Name	Door seals set
2	Model	MH1925-20FT
3	Parameter	Length: 20ft
4	Binding Agent	Quantity:2

	Items	Description
1	Name	Door seals set
2	Model	MH1925-10FT
3	Parameter	Length: 10ft
4	Binding Agent	Quantity:1

	Items	Description
1	Name	Door seals set
2	Model	MH1925-16.5FT
3	Parameter	Length: 16.5ft
4	Binding Agent	Quantity:2

	Items	Description
1	Name	Door seals set
2	Model	MH1925-12FT
3	Parameter	Length: 12ft
4	Binding Agent	Quantity:1

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

EC REP: E-CrossStu GmbH.

Mainzer Landstr.69, 60329 Frankfurt am Main.

UK REP: YH CONSULTING LIMITED.

C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

Imported to AUS: SIHAO PTY LTD.

1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd.

Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730



Technical Support and E-Warranty Certificate
www.vevor.com/support