

# **VEVOR<sup>®</sup>**

**TOUGH TOOLS, HALF PRICE**

Technical Support and E-Warranty Certificate [www.vevor.com/support](http://www.vevor.com/support)

## **DOOR SEALS KIT USER MANUAL**

**MODEL:MH1400-34FT/MH1400-20FT**

We continue to be committed to provide you tools with competitive price.


"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

# VEVOR®

TOUGH TOOLS, HALF PRICE

## DOOR SEALS KIT

**MODEL: MH1400-34FT/MH1400-20FT**

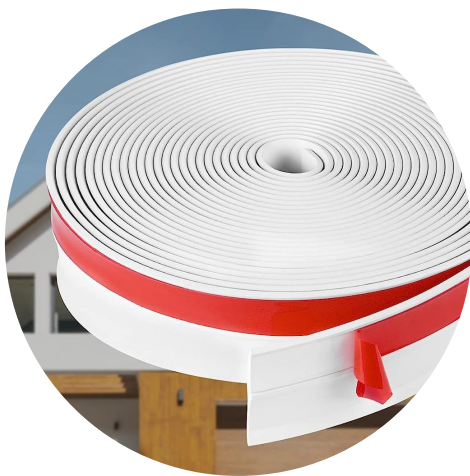

**Note:** The actual product you receive determines its look.

### **NEED HELP? CONTACT US!**

Have product questions? Need technical support? Please feel free to contact us:  
Technical Support and E-Warranty Certificate [www.vevor.com/support](http://www.vevor.com/support)

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

## **WARNING!**

Read this material before using this product. Failure to do so can result in serious injury.

1. This product is not a toy. Do not allow children to play with this item.
2. Use as intended only.

## **2. Product Introduce**

The main material of the door sealing strip is rubber, which mainly solves the problems of the door is not sealed, dust, insects, outdoor noise, temperature insulation, heat preservation and other problems;

It is mainly installed in three parts: the gap under the door, the gap between the door frame and the wall, and the gap between the door frame and the door. There will be different products for different opening ways of the door.

## **3.Accessories**




Screw




Screw Decorative Cap


## 4.Installation Introduction

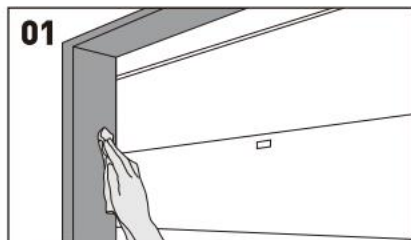


01 Clean the jamb of the garage door.

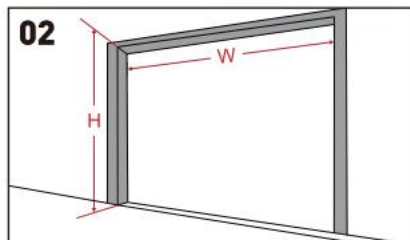


02 Measure the length of garage door and trim the length of seal strip.

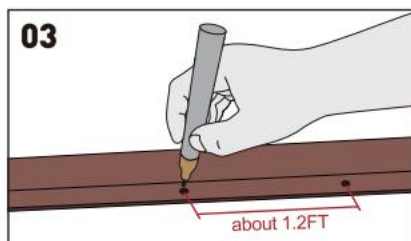


03 The sealing strip marks the perforation points (the aperture is about 0.16 in), about 1.2 feet apart.

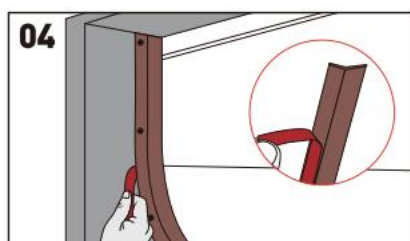

04 Tear the back adhesive protective film at one end of the garage door seal strip and paste it in the fixed position.

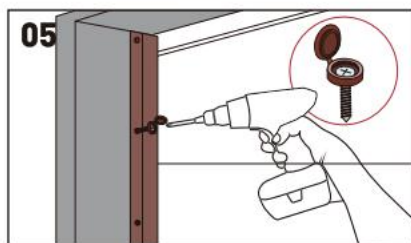

05 Before installing the screws, put the decorative cap on the screws and then fix the screws.

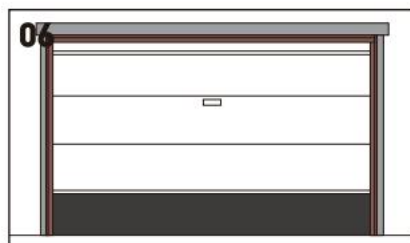

06 After installation, please check whether the door can be opened and closed easily.

### Suggestion:

Apply glass glue around the sealing strip to make it more firm.

## 5.Parameter

	Items	Description
1	Name	Door seals set
2	Model	MH1400-34FT
3	Parameter	Length: 34ft
4	Screw	Quantity:38
5	Screw Decorative Cap	Quantity:38
6	Colour	White

	Items	Description
1	Name	Door seals set
2	Model	MH1400-20FT
3	Parameter	Length: 20ft
4	Screw	Quantity:28
5	Screw Decorative Cap	Quantity:28
6	Colour	Black

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

EC REP: E-CrossStu GmbH.

Mainzer Landstr.69, 60329 Frankfurt am Main.

UK REP: YH CONSULTING LIMITED.

C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

Imported to AUS: SIHAO PTY LTD.

1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd.

Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730





Technical Support and E-Warranty Certificate  
[www.vevor.com/support](http://www.vevor.com/support)