

# **VEVOR<sup>®</sup>**

**TOUGH TOOLS, HALF PRICE**

Technical Support and E-Warranty Certificate [www.vevor.com/support](http://www.vevor.com/support)

## **NINJA LINE/SLACK LINE KIT**

**MODEL: MODEL: PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60**

We continue to be committed to provide you tools with competitive price.


"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

# VEVOR®

TOUGH TOOLS, HALF PRICE

NINJA LINE/  
SLACK LINE KIT

MODEL: PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60

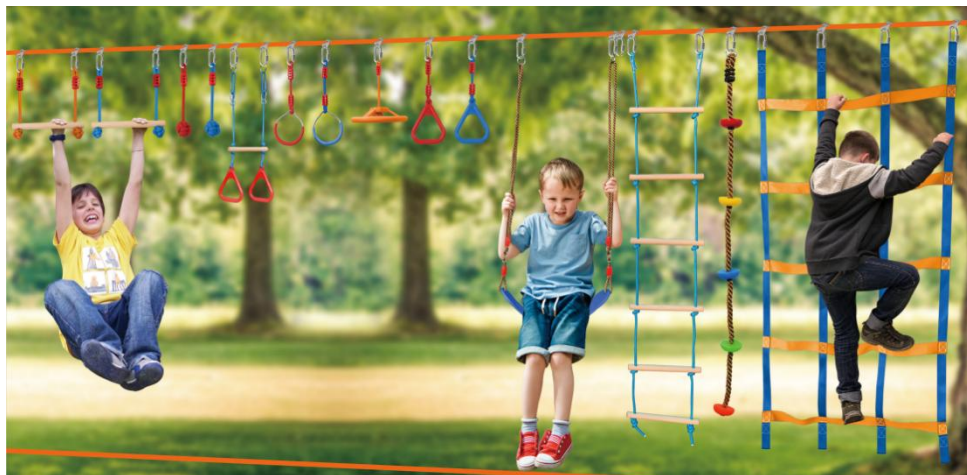



## NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

**Technical Support and E-Warranty Certificate**  
**[www.vevor.com/support](http://www.vevor.com/support)**

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	Be careful to pinch your hands.

## SAFETY WARNINGS AND PRECAUTIONS

Thank you for using this product. In order to make sure that you can operate the machine correctly, read this instruction carefully before operation and keep it properly for future reference. Please be sure to read the precautions and safety rules in this page to ensure your safe use. This manual will outline safety warnings and precautions, operating, maintenance and cleaning. The warnings and instructions reviewed in this manual cannot cover all possible conditions and situations that may occur. Caution and common sense are not built into this product, since we believe that the uses will comply with these codes.

**Please read ALL the instructions before using your machine.**

1. Assemble needs to follow these instructions. Incorrect assembly can be a hazard. Wear heavy-duty work gloves during assembly.
2. Do not assemble when tired or when under the influence of alcohol, drugs or medication.
3. Keep the assembly area clean and well-lit.
4. Inspect before every use. Do not use it if parts are loose or damaged.

### **WARNING:**

- This product contains small parts. If swallowed, it will pose a choking hazard. Keep these small parts away from children when assembling!

**TIPS:** Before installation, the packaging can be laid flat on the ground and the product placed on the packaging for assembly to protect the product. About this item.

## Product related parameters

Model	PR-012-50	PR-010-50	PR-012-56	PR-014-60	PR-012-65	PR-03-60
Ribbon specifications	50FT	50FT	56FT	60FT	65FT	60FT
Six layer rope ladder	1	1	1	1	1	
Soft board swing	1	1	1	1	1	
Climbing the web	1	1	1	1	1	
Climbing rope	/	/	/	1	/	
Kuchuburanko	1	/	/	1	1	
Gymnastic Triangle Ring	1	/	/	2	1	
Monkey pole	2	3	3	2	2	
Monkey fist	2	3	3	2	2	
Gymnastic Circle	2	/	2	2	2	
Rotating wheel	1	1	1	1	1	
Total quantity	12	10	12	14	12	/





## Installation instructions



### ● HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).



#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**



If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### ● HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



## Installation instructions

### ● HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.**

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



**Step 3: Install the main line and ratchet line on the installed tree protectors.**

**Step 4: Install the hanging buckles to the main line.**

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

**Step 5: Use the ratchet to tighten the main line of the slackline.**

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

**Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.**

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### ● HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open The ratchet is closed

**Technical Support and E-Warranty Certificate** [www.vevor.com/support](http://www.vevor.com/support)





## Installation instructions

### • HOW TO SET UP A NINJA OBSTACLE COURSE

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1. First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to slow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



## Installation instructions



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.




3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



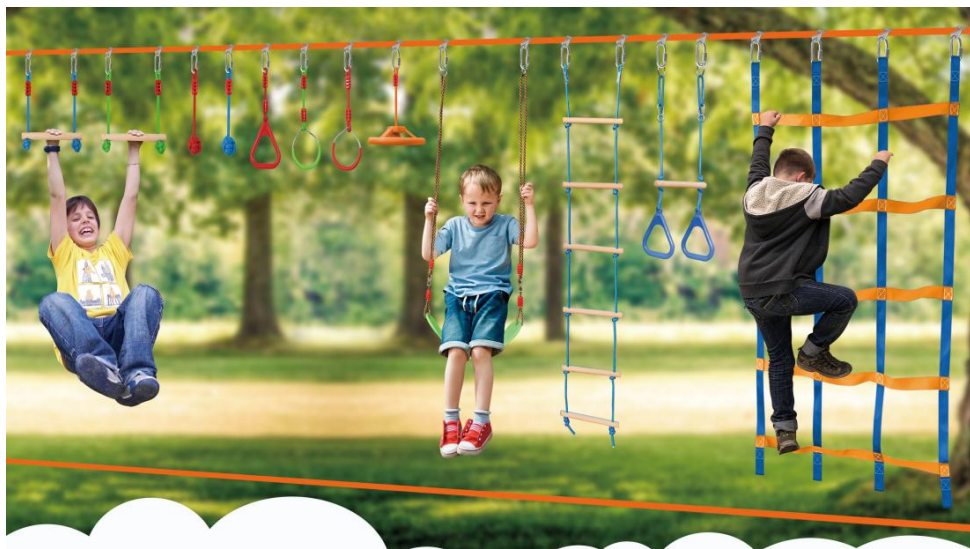

## Installation instructions

### HOW TO SET UP A NINJA OBSTACLE COURSE

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### HOW TO USE THE RATCHET LINE



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



## Installation instructions



1"

1in\*60ft Ninja Line & Ratchet Line



2"

2in\*60ft Ninja Line & Ratchet Line



1 Balance Belt



1 Ratchet Protective Sleeve



4 Tree Protectors



1 Carry Bag

### • HOW TO SET UP A SLACKLINE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

#### Step 3: Attach the main line to a tree or solid post.

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

#### Step 5: How to use the slackline ratchet?

We introduced the use of ratchet on the right.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## CLEANING AND STORAGE

1. Wipe with a soft, dry cloth. Never use an abrasive cleanser or harsh pad. Wipe with clean water. Keep product dry after cleaning.
2. Children are **not allowed** to wipe the product to avoid tipping and falling injuries.
3. After the product is disassembled, please put the parts and accessories together.

**Manufacturer: Shanghaimuxinmuyeyouxiangongsi**

**Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.**

**Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia**

**Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730**

<b>UK</b>	<b>REP</b>
-----------	------------

**YH CONSULTING LIMITED.**

**C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX**

<b>EC</b>	<b>REP</b>
-----------	------------

**E-CrossStu GmbH**

**Mainzer Landstr.69, 60329 Frankfurt am Main.**

**Made In China**

# **VEVOR<sup>®</sup>**

**TOUGH TOOLS, HALF PRICE**

**Technical Support and E-Warranty Certificate**

**[www.vevor.com/support](http://www.vevor.com/support)**





Assistance technique et certificat de garantie électronique [www.vevor.com/support](http://www.vevor.com/support)

## KIT LIGNE NINJA/SLACK LIGNE

MODÈLE : MODÈLE : PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60

Nous continuons à nous engager à vous fournir des outils à des prix compétitifs.

« Économisez la moitié », « Moitié prix » ou toute autre expression similaire utilisée par nous ne représente qu'une estimation des économies que vous pourriez réaliser en achetant certains outils chez nous par rapport aux grandes marques et ne couvre pas nécessairement toutes les catégories d'outils que nous proposons.


Nous vous rappelons de bien vouloir vérifier soigneusement lorsque vous passez une commande chez nous si vous économisez réellement la moitié par rapport aux grandes marques.

**VEVOR<sup>®</sup>**  
**TOUGH TOOLS, HALF PRICE**

LIGNE NINJA/  
KIT DE SLACK-LINE

MODÈLE : PR-012-50/PR-010-50/PR-012-56/

PR-014-60/PR-012-65/PR-03-60

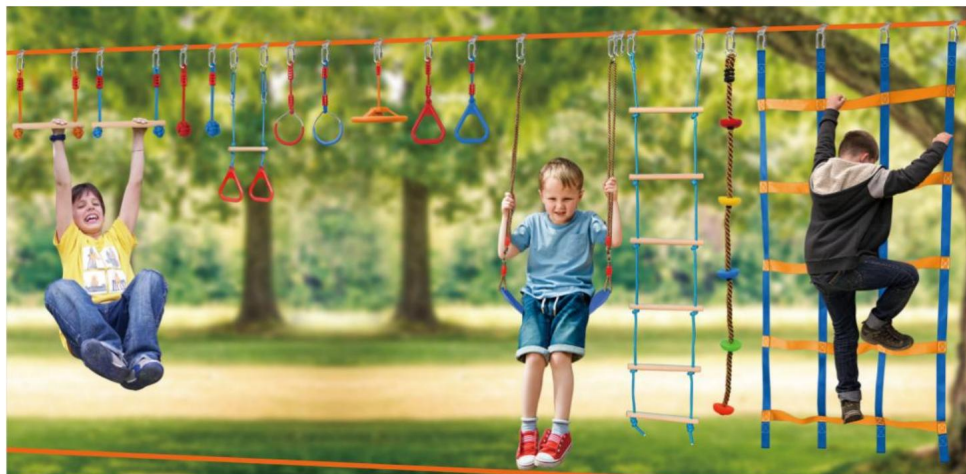



### BESOIN D'AIDE? CONTACTEZ-NOUS!

Vous avez des questions sur nos produits ? Vous avez besoin d'assistance technique ?  
N'hésitez pas

à nous contacter : Assistance technique et certificat de garantie  
électronique [www.vevor.com/support](http://www.vevor.com/support)

Il s'agit de la notice d'utilisation d'origine. Veuillez lire attentivement toutes les instructions du manuel avant de l'utiliser. VEVOR se réserve le droit d'interpréter clairement notre manuel d'utilisation. L'apparence du produit dépend du produit que vous avez reçu. Veuillez nous excuser, nous ne vous informons plus en cas de mise à jour technologique ou logicielle de notre produit.

	<p>Avertissement - Pour réduire le risque de blessure, l'utilisateur doit lire</p> <p>Lisez attentivement le manuel d'instructions.</p>
	<p>Faites attention à ne pas pincer vos mains.</p>

## AVERTISSEMENTS ET PRÉCAUTIONS DE SÉCURITÉ

Nous vous remercions d'avoir utilisé ce produit. Afin de vous assurer que vous pouvez

Pour utiliser correctement la machine, lisez attentivement ces instructions avant

fonctionnement et conservez-le correctement pour référence ultérieure. Veuillez vous assurer de lire les précautions et les règles de sécurité de cette page pour assurer votre utilisation en toute sécurité.

Le manuel décrit les avertissements et précautions de sécurité, le fonctionnement, l'entretien et le nettoyage. Les avertissements et instructions examinés dans ce

Le manuel ne peut pas couvrir toutes les conditions et situations possibles qui peuvent survenir.

La prudence et le bon sens ne sont pas intégrés dans ce produit, car nous pensons que les usages seront conformes à ces codes.

Veuillez lire TOUTES les instructions avant d'utiliser votre machine.

1. L'assemblage doit suivre ces instructions. Un assemblage incorrect peut entraîner un danger. Portez des gants de travail résistants pendant l'assemblage.

2. Ne montez pas lorsque vous êtes fatigué ou sous l'influence de l'alcool, de drogues ou de médicaments.

3. Gardez la zone de montage propre et bien éclairée.

4. Inspectez l'appareil avant chaque utilisation. Ne l'utilisez pas si des pièces sont desserrées ou endommagées.

AVERTISSEMENT:

• Ce produit contient de petites pièces. En cas d'ingestion, il peut présenter un risque d'étouffement.

Danger. Gardez ces petites pièces hors de portée des enfants lors du montage !


CONSEILS : Avant l'installation, l'emballage peut être posé à plat sur le sol et le produit placé sur l'emballage pour l'assemblage afin de protéger le produit.

À propos de cet article.

## Paramètres liés au produit

Modèle	PR-012-50	PR-010-50	PR-012-56	PR-014-60	PR-012-65	PR-03-60
Ruban spécifié nous	50 pieds	50 pieds	56 pieds	60 pieds	65 PIEDS	60 PIEDS
Six couches corde échelle	1	1	1	1	1	
Panneau souple balançoire	1	1	1	1	1	
Escalade le web	1	1	1	1	1	
Escalade corde	/	/	/	1	/	
Coin buranko	1	/	/	1	1	
Gymnastique c Triangle Anneau	1	/	/	2	1	
Singe il n'y a pas	2	3	3	2	2	
Singe poing	2	3	3	2	2	
Gymnastique c Cercle	2	/	2	2	2	
Tournant roue	1	1	1	1	1	
Total quantité	12	10	12	14	12	/

PR-012-50

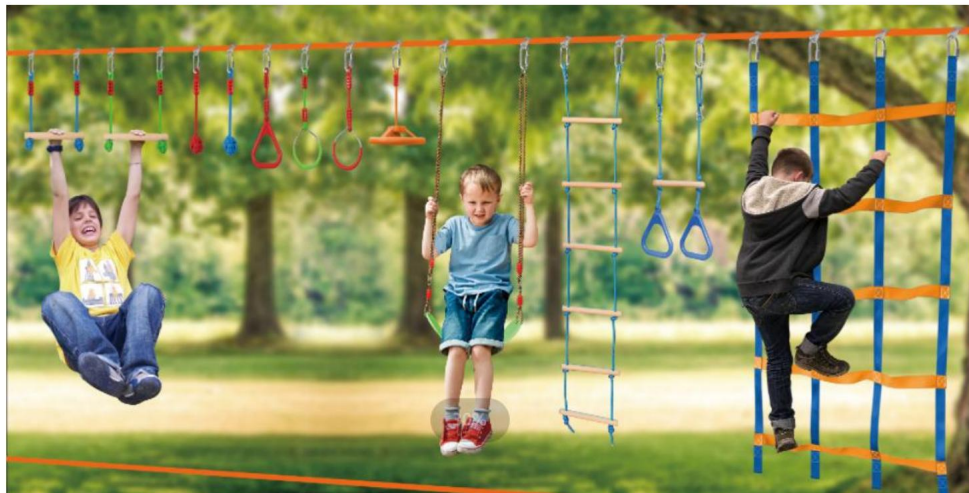

## Instructions d'installation



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-010-50



## Instructions d'installation



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).



#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.**

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



**Step 3: Install the main line and ratchet line on the installed tree protectors.**

**Step 4: Install the hanging buckles to the main line.**

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

**Step 5: Use the ratchet to tighten the main line of the slackline.**

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

**Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.**

**Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!**

### • HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



**Technical Support and E-Warranty Certificate [www.vevor.com/support](http://www.vevor.com/support)**

PR-012-56



## Instructions d'installation

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: Please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-014-60



## Instructions d'installation



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-65



## Instructions d'installation



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180°. At the same time, after hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-03-60



## Instructions d'installation



### • HOW TO SET UP A SLACKLINE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

#### Step 3: Attach the main line to a tree or solid post.

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

#### Step 5: How to use the slackline ratchet?

We introduced the use of ratchet on the right.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## NETTOYAGE ET STOCKAGE

1. Essuyez avec un chiffon doux et sec. N'utilisez jamais de nettoyeur abrasif ou de tampon agressif. Essuyer avec de l'eau propre. Garder le produit au sec après le nettoyage.
2. Les enfants ne sont pas autorisés à essuyer le produit pour éviter tout basculement et toute chute. blessures.
3. Une fois le produit démonté, veuillez ranger les pièces et les accessoires. ensemble.

Fabricant : Shanghaixinmuyeyouxiangongsi

Adresse : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.


Importé en Australie : SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD  
NSW 2122 Australie

Importé aux États-Unis : Sanven Technology Ltd. Suite 250, 9166 Anaheim  
Lieu, Rancho Cucamonga, Californie  
91730



YH CONSULTING LIMITÉE.

A/S YH Consulting Limited Bureau 147, Centurion  
Maison, London Road, Staines-upon-Thames,  
Surrey, TW18 4AX



E-CrossStu GmbH

Mainzer Landstr.69, 60329 Francfort-sur-le-Main.

Fabriqu  en Chine

**VEVOR<sup>®</sup>**  
**TOUGH TOOLS, HALF PRICE**

Assistance technique et certificat de garantie  
électronique [www.vevor.com/support](http://www.vevor.com/support)



Technischer Support und E-Garantie-Zertifikat [www.vevor.com/support](http://www.vevor.com/support)

## **NINJA LINE/SLACK LINE-KIT**

**MODELL:MODELL:PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60**

Wir sind weiterhin bestrebt, Ihnen Werkzeuge zu wettbewerbsfähigen Preisen anzubieten.

„Sparen Sie die Hälfte“, „Halber Preis“ oder andere ähnliche Ausdrücke, die wir verwenden, stellen nur eine Schätzung der Ersparnis dar, die Sie beim Kauf bestimmter Werkzeuge bei uns im Vergleich zu den großen Topmarken erzielen können, und decken nicht unbedingt alle von uns angebotenen Werkzeugkategorien ab. Wir möchten Sie freundlich daran erinnern, bei Ihrer Bestellung bei uns sorgfältig zu prüfen, ob Sie im Vergleich zu den großen Topmarken tatsächlich die Hälfte sparen.




**VEVOR<sup>®</sup>**  
TOUGH TOOLS, HALF PRICE

**NINJA-LINIE/  
SLACKLINE-KIT**

**MODELL: PR-012-50/PR-010-50/PR-012-56/**

**PR-014-60/PR-012-65/PR-03-60**

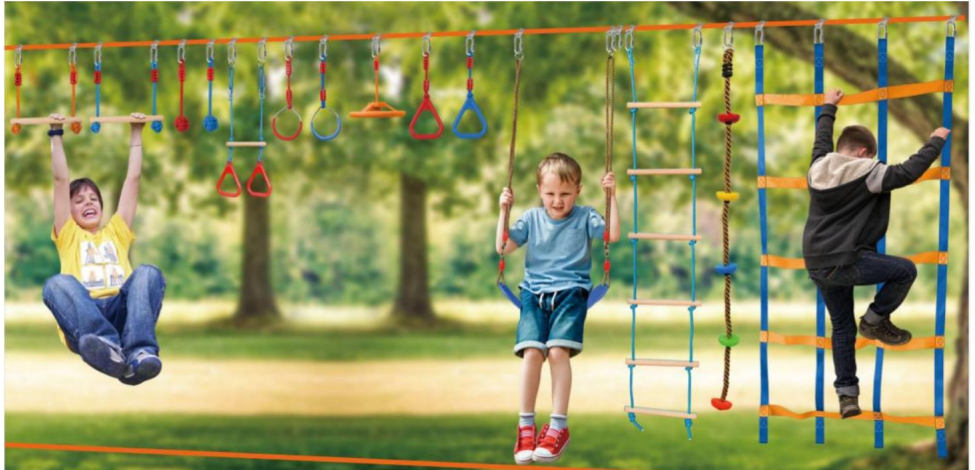



**Brauchen Sie Hilfe? Kontaktieren Sie uns!**

Haben Sie Fragen zum Produkt? Benötigen Sie technischen Support? Bitte kontaktieren Sie uns:

**Technischer Support und E-Garantie-Zertifikat [www.vevor.com/support](http://www.vevor.com/support)**

Dies ist die Originalanleitung. Bitte lesen Sie alle Anweisungen sorgfältig durch, bevor Sie das Gerät in Betrieb nehmen. VEVOR behält sich eine klare Auslegung unserer Bedienungsanleitung vor. Das Erscheinungsbild des Produkts richtet sich nach dem Produkt, das Sie erhalten haben. Bitte verzeihen Sie uns, dass wir Sie nicht erneut informieren, wenn es Technologie- oder Software-Updates für unser Produkt gibt.

	<p>Warnung-Um das Verletzungsrisiko zu verringern, muss der Benutzer</p> <p>Lesen Sie die Bedienungsanleitung sorgfältig durch.</p>
	<p>Passen Sie auf, dass Sie sich nicht die Hände einklemmen.</p>

## SICHERHEITSHINWEISE UND VORSICHTSMASSNAHMEN

Vielen Dank, dass Sie dieses Produkt verwenden. Um sicherzustellen, dass Sie

Um die Maschine richtig zu bedienen, lesen Sie diese Anleitung sorgfältig durch, bevor Sie

und bewahren Sie sie für spätere Verwendung gut auf. Bitte lesen Sie sie unbedingt

die Vorsichtsmaßnahmen und Sicherheitsregeln auf dieser Seite, um Ihre sichere Verwendung zu gewährleisten.

In diesem Handbuch werden Sicherheitshinweise und Vorsichtsmaßnahmen sowie Bedienung,

Wartung und Reinigung beschrieben. Die in diesem Handbuch beschriebenen Hinweise und

Das Handbuch kann nicht alle möglichen Bedingungen und Situationen abdecken, die auftreten können.

Vorsicht und gesunder Menschenverstand sind in diesem Produkt nicht eingebaut, da wir glauben

dass die Verwendung diesen Vorschriften entspricht.

**Bitte lesen Sie ALLE Anweisungen, bevor Sie Ihre Maschine verwenden.**

1. Die Montage muss diesen Anweisungen folgen. Eine falsche Montage kann eine Gefahr. Tragen Sie während der Montage schwere Arbeitsschuhe.
2. Nicht montieren, wenn Sie müde sind oder unter dem Einfluss von Alkohol, Drogen oder Medikamenten stehen.
3. Halten Sie den Versammlungsbereich sauber und gut beleuchtet.
4. Vor jedem Gebrauch überprüfen. Nicht verwenden, wenn Teile lose oder beschädigt sind.

### **WARNUNG:**

- Dieses Produkt enthält Kleinteile. Bei Verschlucken besteht Erstickungsgefahr.
- Gefahr. Halten Sie diese Kleinteile beim Zusammenbau von Kindern fern!

**TIPPS:** Vor der Installation kann die Verpackung flach auf den Boden gelegt werden und

Das Produkt wird zur Montage auf die Verpackung gelegt, um das Produkt zu schützen.


Über diesen Artikel.

## Produktbezogene Parameter

Modell	PR-012-50	PR-010-50	PR-012-56	PR-014-60	PR-012-65	PR-03-60
Schleife angegeben Wir	50 Fuß	50 Fuß	56 Fuß	60FT	65 Fuß	60 Fuß
Sechs Schichten Seil Leiter	1	1	1	1	1	
Weiches Brett Swing	1	1	1	1	1	
Klettern das Web	1	1	1	1	1	
Klettern Seil	/	/	/	1	/	
Ecke Buranko	1	/	/	1	1	
Gymnastik c Dreieck Ring	1	/	/	2	1	
Affe <small>gibt es nicht</small>	2	3	3	2	2	
Affe Faust	2	3	3	2	2	
Gymnastik c Kreis	2	/	2	2	2	
Drehen Rad	1	1	1	1	1	
Gesamt Menge	12	10	12	14	12	/



## PR-012-50

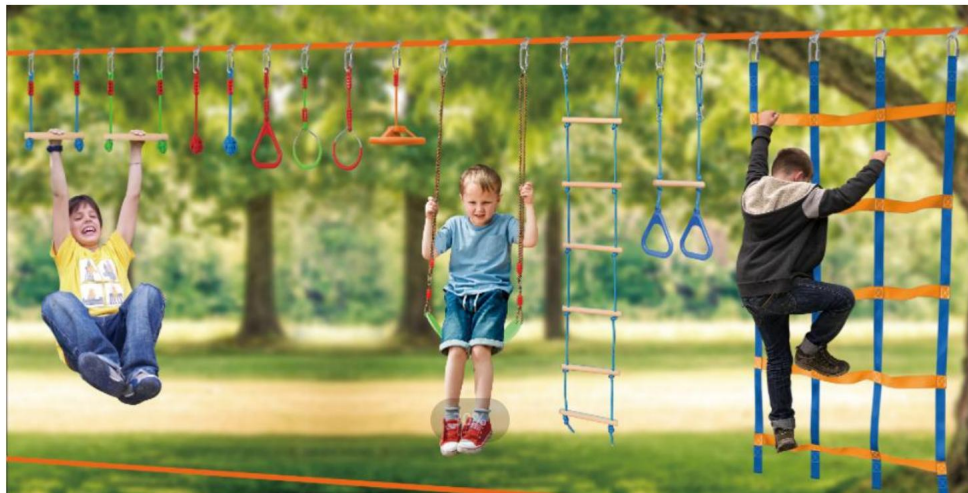

## Installationsanleitung



## ● HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## ● HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PR-010-50



## Installationsanleitung



## ● HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.**

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



**Step 3: Install the main line and ratchet line on the installed tree protectors.**

**Step 4: Install the hanging buckles to the main line.**

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


**Step 5: Use the ratchet to tighten the main line of the slackline.**

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

**Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.**

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## ● HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-56



## Installationsanleitung

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-014-60



## Installationsanleitung



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**



If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.




3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-65

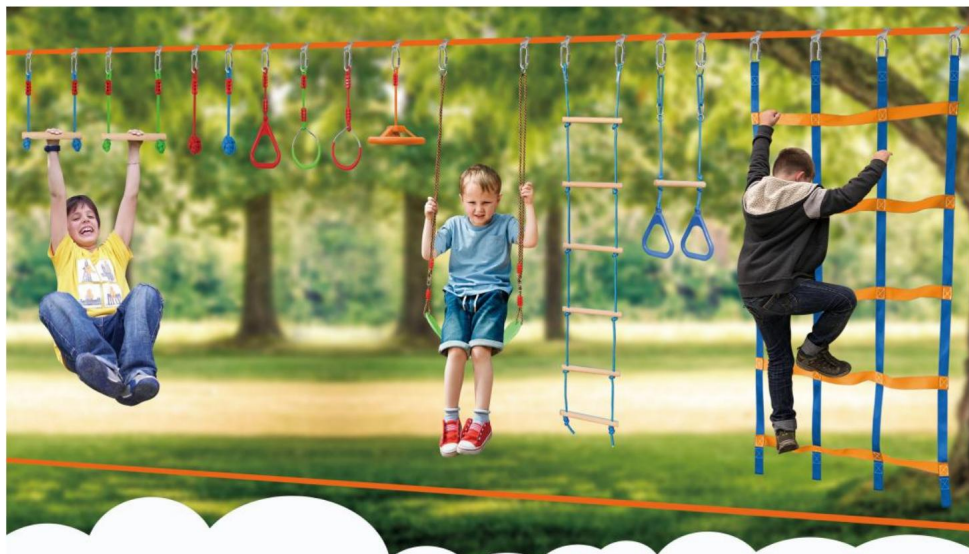

## Installationsanleitung

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with the figure under and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure under and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PR-03-60



## Installationsanleitung



## • HOW TO SET UP A SLACKLINE?

**Step 1: Where to Slackline?**

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

**▲ MATTERS NEEDING ATTENTION:**

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.****Step 3: Attach the main line to a tree or solid post.**

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

**Step 5: How to use the slackline ratchet?**

We introduced the use of ratchet on the right.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

## • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## REINIGUNG UND LAGERUNG

1. Mit einem weichen, trockenen Tuch abwischen. Verwenden Sie niemals Scheuermittel oder raue Pads. Mit klarem Wasser abwischen. Produkt nach der Reinigung trocken halten.
2. Kinder **dürfen das Produkt nicht** abwischen, um ein Umkippen und Herunterfallen zu vermeiden Verletzungen.
3. Nachdem das Produkt zerlegt wurde, legen Sie bitte die Teile und Zubehör zusammen.

**Hersteller: Shanghaimuxinmuyeyouxiangongsi**

**Adresse: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghai 200000 CN.**


**Nach AUS importiert: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD  
NSW 2122 Australien**

**Importiert in die USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim  
Ort, Rancho Cucamonga, Kalifornien  
91730**



**YH CONSULTING LIMITED.**

**C/O YH Consulting Limited Office 147, Centurion  
Haus, London Road, Staines-upon-Thames,  
Surrey, TW18 4AX**



**E-CrossStu GmbH**

**Mainzer Landstr.69, 60329 Frankfurt am Main.**

**In China hergestellt**



Technischer Support und E-Garantie-Zertifikat  
[www.vevor.com/support](http://www.vevor.com/support)





Supporto tecnico e certificato di garanzia elettronica [www.vevor.com/support](http://www.vevor.com/support)

## **KIT LINEA NINJA/LINEA SLACK**

**MODELLO:MODELLO:PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60**

Continuiamo a impegnarci per fornirvi strumenti a prezzi competitivi.


"Risparmia la metà", "Metà prezzo" o qualsiasi altra espressione simile da noi utilizzata rappresenta solo una stima del risparmio che potresti ottenere acquistando determinati utensili con noi rispetto ai principali marchi principali e non significa necessariamente coprire tutte le categorie di utensili da noi offerti. Ti ricordiamo gentilmente di verificare attentamente quando effettui un ordine con noi se stai effettivamente risparmiando la metà rispetto ai principali marchi principali.

# VEVOR<sup>®</sup>

TOUGH TOOLS, HALF PRICE

LINEA NINJA/  
KIT LINEA FOLLE

MODELLO: PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60

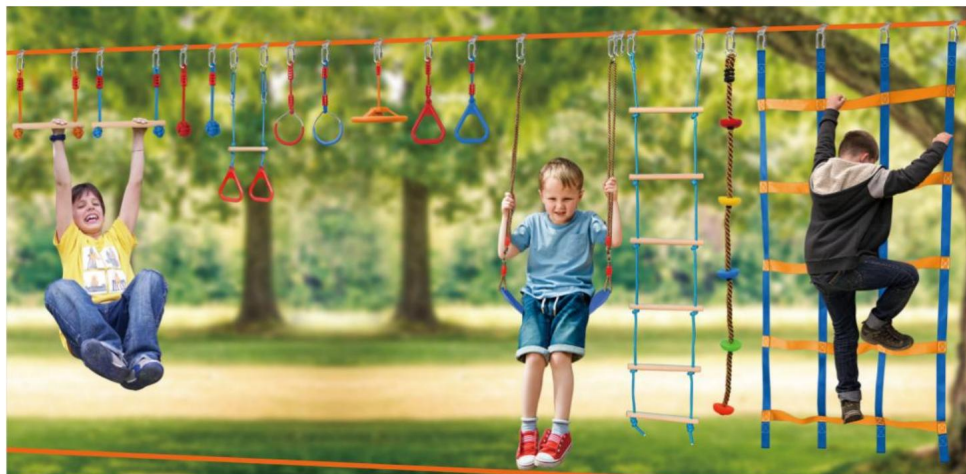



## HAI BISOGNO DI AIUTO? CONTATTACI!

Hai domande sul prodotto? Hai bisogno di supporto tecnico? Non esitare a contattarci:

### Supporto

**tecnico e certificato di garanzia elettronica [www.vevor.com/  
support](http://www.vevor.com/support)**

Questa è l'istruzione originale, si prega di leggere attentamente tutte le istruzioni del manuale prima di utilizzare. VEVOR si riserva una chiara interpretazione del nostro manuale utente. L'aspetto del prodotto sarà soggetto al prodotto ricevuto. Vi preghiamo di perdonarci se non vi informeremo di nuovo se ci sono aggiornamenti tecnologici o software sul nostro prodotto.

	Attenzione: per ridurre il rischio di lesioni, l'utente deve leggere attentamente il manuale di istruzioni.
	Fai attenzione a non pizzicarti le mani.

## AVVERTENZE E PRECAUZIONI DI SICUREZZA

Grazie per aver utilizzato questo prodotto. Per assicurarti di poter utilizzare la macchina correttamente, leggere attentamente queste istruzioni prima funzionamento e conservarlo correttamente per riferimento futuro. Si prega di leggere attentamente le precauzioni e le norme di sicurezza in questa pagina per garantire un utilizzo sicuro. Questo manuale delineerà le avvertenze e le precauzioni di sicurezza, il funzionamento, la manutenzione e la pulizia. Le avvertenze e le istruzioni esaminate in questo Il manuale non può coprire tutte le possibili condizioni e situazioni che potrebbero verificarsi. La cautela e il buon senso non sono incorporati in questo prodotto, poiché crediamo che gli utilizzi siano conformi a tali codici.

**Si prega di leggere TUTTE le istruzioni prima di utilizzare la macchina.**

1. Il montaggio deve seguire queste istruzioni. Un montaggio non corretto può essere un pericolo. Indossare guanti da lavoro resistenti durante il montaggio.
2. Non riunirsi quando si è stanchi o sotto l'effetto di alcol, droghe o farmaci.

3. Mantenere l'area di assemblaggio pulita e ben illuminata.
4. Ispezionare prima di ogni utilizzo. Non utilizzarlo se le parti sono allentate o danneggiate.

### AVVERTIMENTO:

- Questo prodotto contiene piccole parti. Se ingerito, può causare soffocamento. pericolo. Tenere queste piccole parti lontano dalla portata dei bambini durante il montaggio!

**SUGGERIMENTI:** Prima dell'installazione, l'imballaggio può essere steso a terra e il prodotto posto sulla confezione per l'assemblaggio per proteggere il prodotto.


Informazioni su questo articolo.

## Parametri relativi al prodotto

Modello	PR-012- 50	PR-010- 50	PR-012- 56	PR-014- 60	PR-012- 65	PR-03- 60
Nastro specificati Noi	50 PIEDI	50 PIEDI	56 piedi	60 piedi	65 PIEDI	60 PIEDI
Sei strati corda scala	1	1	1	1	1	
Pannello morbido oscillazione	1	1	1	1	1	
Arrampicata la rete	1	1	1	1	1	
Arrampicata corda	/	/	/	1	/	
Angolo buranko	1	/	/	1	1	
Ginnastica c Triangolo Squillo	1	/	/	2	1	
Scimmia non c'è	2	3	3	2	2	
Scimmia pugno	2	3	3	2	2	
Ginnastica c Cerchio	2	/	2	2	2	
Rotante ruota	1	1	1	1	1	
Totale quantità	12	10	12	14	12	/



## PR-012-50

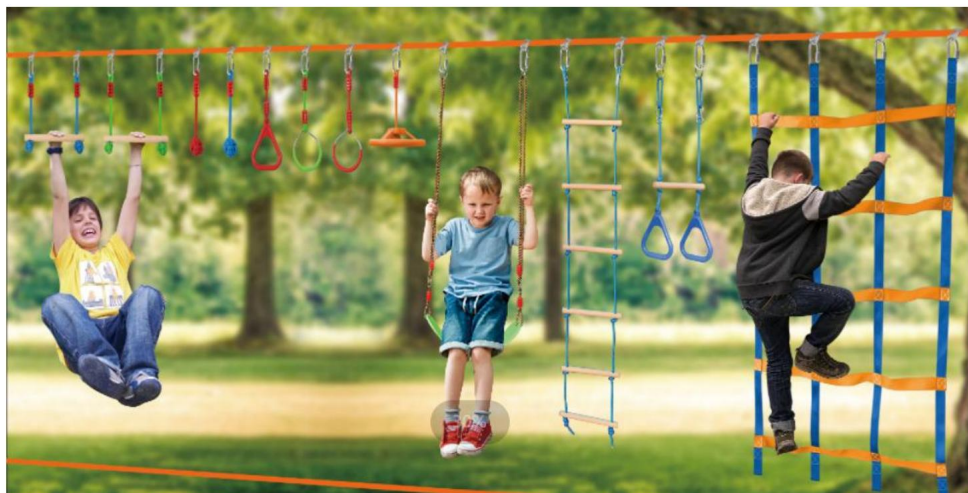

## Istruzioni per l'installazione



## ● HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## ● HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-010-50



## Istruzioni per l'installazione

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.**

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



**Step 3: Install the main line and ratchet line on the installed tree protectors.**

**Step 4: Install the hanging buckles to the main line.**

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

**Step 5: Use the ratchet to tighten the main line of the slackline.**  
Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

**Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.**

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-56



## Istruzioni per l'installazione

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: Please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180°. At the same time, after hearing the 'bang', you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-014-60



## Istruzioni per l'installazione



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.




3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-65

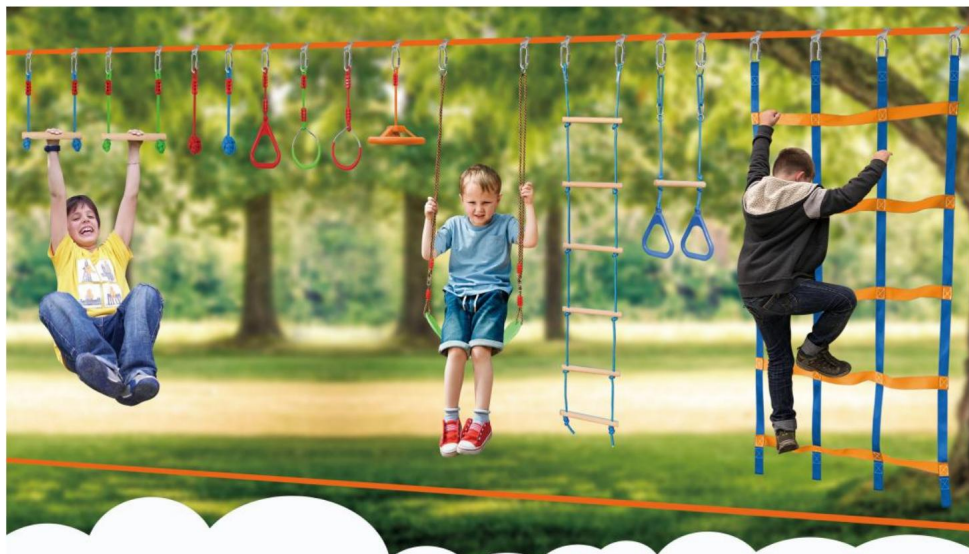

## Istruzioni per l'installazione

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-03-60



## Istruzioni per l'installazione



### • HOW TO SET UP A SLACKLINE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. In any doubt, contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

#### Step 3: Attach the main line to a tree or solid post.

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

#### Step 5: How to use the slackline ratchet?

We introduced the use of ratchet on the right.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PULIZIA E CONSERVAZIONE

1. Pulire con un panno morbido e asciutto. Non utilizzare mai un detergente abrasivo o una spugna abrasiva. Pulire con acqua pulita. Mantenere il prodotto asciutto dopo la pulizia.
2. **Non è consentito** ai bambini di pulire il prodotto per evitare ribaltamenti e cadute. lesioni.
3. Dopo aver smontato il prodotto, rimettere le parti e gli accessori insieme.

**Produttore: Shanghaimuxinmuyeyouxiangongsi**

**Indirizzo: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.**

**Importato in AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD**

**Nuovo Galles del Sud 2122 Australia**

**Importato negli USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim**


**Luogo, Rancho Cucamonga, CA  
91730**



**CONSULENZA YH LIMITATA.**

**C/O YH Consulting Limited Ufficio 147, Centurion  
Casa, London Road, Staines-upon-Thames,**

**Viale della Vittoria, 101 00186 Roma**



**E-CrossStu GmbH**

**Mainzer Landstr.69, 60329 Francoforte sul Meno.**

**Made in China**

**VEVOR<sup>®</sup>**  
**TOUGH TOOLS, HALF PRICE**

**Supporto tecnico e certificato di garanzia  
elettronica [www.vevor.com/support](http://www.vevor.com/support)**





Soporte técnico y certificado de garantía electrónica [www.vevor.com/support](http://www.vevor.com/support)

## KIT DE LÍNEA NINJA/LÍNEA RELAJADA

MODELO:MODELO:PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60

Seguimos comprometidos a brindarle herramientas a precios competitivos.


"Ahorre la mitad", "mitad de precio" o cualquier otra expresión similar que utilicemos solo representa una estimación del ahorro que podría obtener al comprar ciertas herramientas con nosotros en comparación con las principales marcas y no necesariamente significa que cubra todas las categorías de herramientas que ofrecemos. Le recordamos que, al realizar un pedido con nosotros, verifique cuidadosamente si realmente está ahorrando la mitad en comparación con las principales marcas.

# VEVOR<sup>®</sup>

**TOUGH TOOLS, HALF PRICE**

LINEA NINJA/  
KIT DE CUERDA FLOJA

MODELO: PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60

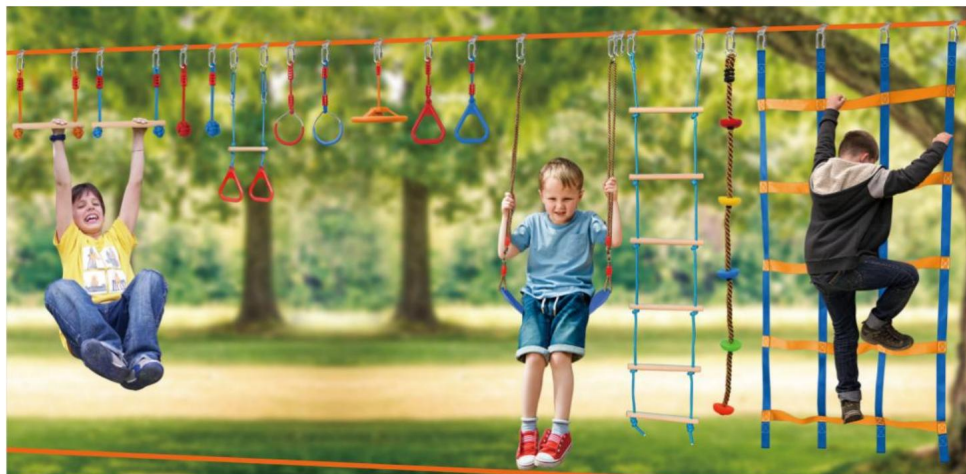



**¿NECESITA AYUDA? ¡CONTÁCTENOS!**

¿Tiene preguntas sobre el producto? ¿Necesita asistencia técnica? No dude en ponerse en contacto con

nosotros: Asistencia técnica y certificado de garantía electrónica  
[www.vevor.com/support](http://www.vevor.com/support)

Estas son las instrucciones originales, lea atentamente todas las instrucciones del manual antes de utilizar el producto. VEVOR se reserva una interpretación clara de nuestro manual de usuario. La apariencia del producto estará sujeta al producto que recibió. Perdónenos por no informarle nuevamente si hay actualizaciones de tecnología o software en nuestro producto.

	<p>Advertencia: Para reducir el riesgo de lesiones, el usuario debe leer Lea atentamente el manual de instrucciones.</p>
	<p>Tenga cuidado de no pellizcarse las manos.</p>

## ADVERTENCIAS Y PRECAUCIONES DE SEGURIDAD

Gracias por utilizar este producto. Para asegurarnos de que pueda

Para utilizar la máquina correctamente, lea atentamente estas instrucciones antes

operación y guárdela en un lugar adecuado para futuras consultas. Asegúrese de leer

Tenga en cuenta las precauciones y normas de seguridad de esta página para garantizar un uso seguro.

El manual describirá las advertencias y precauciones de seguridad, el funcionamiento,

el mantenimiento y la limpieza. Las advertencias e instrucciones que se revisan en este manual

El manual no puede cubrir todas las posibles condiciones y situaciones que pueden ocurrir.

La precaución y el sentido común no están incluidos en este producto, ya que creemos

que los usos cumplirán con estos códigos.

Lea TODAS las instrucciones antes de utilizar su máquina.

1. Para el montaje, siga estas instrucciones. Un montaje incorrecto puede ser

un peligro. Use guantes de trabajo resistentes durante el montaje.

2. No se reúna cuando esté cansado o bajo la influencia del alcohol, drogas o medicamentos.

3. Mantenga el área de reunión limpia y bien iluminada.

4. Inspeccione el producto antes de cada uso. No lo utilice si hay piezas sueltas o dañadas.

**ADVERTENCIA:**

- Este producto contiene piezas pequeñas. Si se ingieren, pueden provocar asfixia.

¡Peligro! ¡Mantenga estas piezas pequeñas fuera del alcance de los niños durante el montaje!

**CONSEJOS:** Antes de la instalación, el embalaje se puede colocar plano sobre el suelo y

El producto colocado en el embalaje para su montaje para proteger el producto.


Acerca de este artículo.

Parámetros relacionados con el producto

Modelo	PR-012-50	PR-010-50	PR-012-56	PR-014-60	PR-012-65	PR-03-60
Cinta especificado <small>nosotros</small>	50 pies	50 pies	56 pies	60 pies	65 pies	60 pies
Seis capas soga escalera	1	1	1	1	1	
Tablero blando <small>balancearse</small>	1	1	1	1	1	
Escalada La red	1	1	1	1	1	
Escalada soga	/	/	/	1	/	
Esquina buranko	1	/	/	1	1	
Gimnasia c Triángulo Anillo	1	/	/	2	1	
Mono <small>no hay</small>	2	3	3	2	2	
Mono <small>puño</small>	2	3	3	2	2	
Gimnasia c Círculo	2	/	2	2	2	
Giratorio rueda	1	1	1	1	1	
Total cantidad	12	10	12	14	12	/



PR-012-50

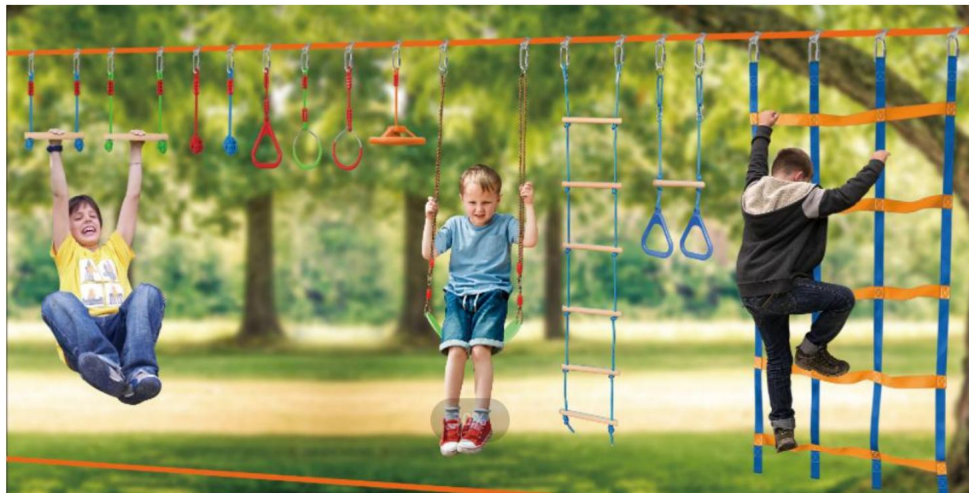

## Instrucciones de instalación



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-010-50



## Instrucciones de instalación



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.**

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



**Step 3: Install the main line and ratchet line on the installed tree protectors.**

**Step 4: Install the hanging buckles to the main line.**

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


**Step 5: Use the ratchet to tighten the main line of the slackline.**

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

**Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.**

**Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!**

### • HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



**Technical Support and E-Warranty Certificate [www.vevor.com/support](http://www.vevor.com/support)**



PR-012-56



## Instrucciones de instalación

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: Please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-014-60



## Instrucciones de instalación



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-65



## Instrucciones de instalación



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-03-60



## Instrucciones de instalación



### • HOW TO SET UP A SLACKLINE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

#### Step 3: Attach the main line to a tree or solid post.

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

#### Step 5: How to use the slackline ratchet?

We introduced the use of ratchet on the right.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## LIMPIEZA Y ALMACENAMIENTO

1. Limpie con un paño suave y seco. Nunca utilice un limpiador abrasivo ni una esponja áspera. Limpiar con agua limpia. Mantener el producto seco después de limpiarlo.
2. No se permite que los niños limpien el producto para evitar que se vuelque y se caiga. lesiones.
3. Después de desmontar el producto, coloque las piezas y los accesorios juntos.

Fabricante: Shanghai muxin muyeyouxiangongsi

Dirección: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.


Importado a Australia: SIHAO PTY LTD. 1 ROKEVA STREET EASTWOOD

Nueva Gales del Sur 2122 Australia

Importado a EE. UU.: Sanven Technology Ltd. Suite 250, 9166 Anaheim

Lugar, Rancho Cucamonga, CA

91730




YH CONSULTING LIMITADA.

C/O YH Consulting Limited Oficina 147, Centurion

Casa, London Road, Staines-upon-Thames,

Surrey, TW18 4AX



E-CrossStu GmbH

Mainzer Landstr.69, 60329 Fráncfort del Meno.

Hecho en china

**VEVOR<sup>®</sup>**  
**TOUGH TOOLS, HALF PRICE**

Soporte técnico y certificado de garantía  
electrónica [www.vevor.com/support](http://www.vevor.com/support)



# VEVOR<sup>®</sup>

## TOUGH TOOLS, HALF PRICE

Wsparcie techniczne i certyfikat gwarancji elektronicznej [www.vevor.com/support](http://www.vevor.com/support)

### ZESTAW NINJA LINE/SLACK LINE

MODEL: MODEL: PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60


Nadal staramy się oferować Państwu narzędzia w konkurencyjnych cenach.  
„Oszczędź połowę”, „Połowa ceny” lub inne podobne wyrażenia używane przez nas stanowią jedynie szacunkowe oszczędności, jakie możesz uzyskać, kupując u nas określone narzędzia w porównaniu z głównymi markami i niekoniecznie oznaczają one objęcie wszystkich kategorii narzędzi oferowanych przez nas. Uprzejmie przypominamy, aby dokładnie sprawdzić, czy składając u nas zamówienie faktycznie oszczędzasz połowę w porównaniu z głównymi markami.

# VEVOR<sup>®</sup>

TOUGH TOOLS, HALF PRICE

LINIA NINJA/  
ZESTAW SLACK LINE

MODEL: PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60

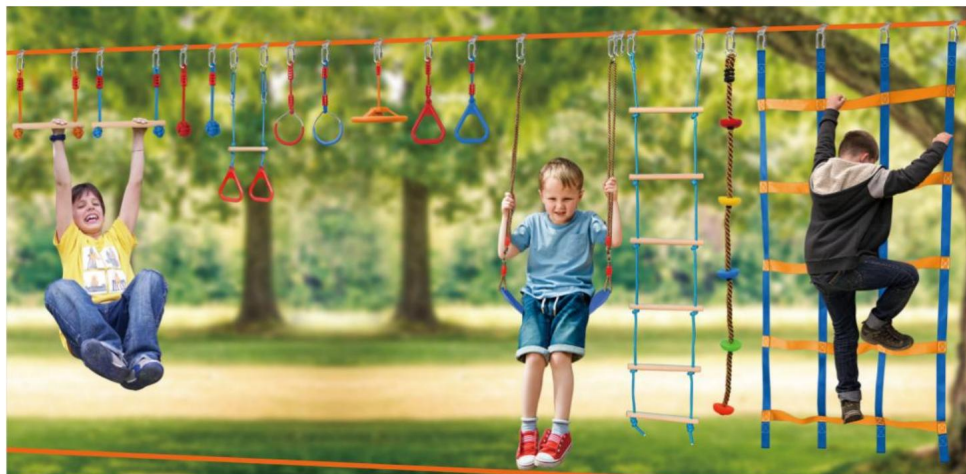



POTRZEBUJESZ POMOCY? SKONTAKTUJ SIĘ Z NAMI!

Masz pytania dotyczące produktu? Potrzebujesz wsparcia technicznego? Skontaktuj się z nami: Wsparcie

techniczne i certyfikat E-Gwarancji [www.vevor.com/support](http://www.vevor.com/support)

To jest oryginalna instrukcja, przed użyciem należy uważnie przeczytać wszystkie instrukcje. VEVOR zastrzega sobie jasną interpretację naszej instrukcji obsługi. Wygląd produktu będzie zależał od produktu, który otrzymałeś. Prosimy o wybaczenie, że nie poinformujemy Cię ponownie, jeśli w naszym produkcie pojawią się jakiegokolwiek aktualizacje technologiczne lub oprogramowania.

	Ostrzeżenie – aby zmniejszyć ryzyko obrażeń, użytkownik musi przeczytać Przeczytaj uważnie instrukcję obsługi.
	Uważaj, żeby nie przytrzasnąć sobie rąk.

#### OSTRZEŻENIA I ŚRODKI OSTROŻNOŚCI DOTYCZĄCE BEZPIECZEŃSTWA

Dziękujemy za korzystanie z tego produktu. Aby mieć pewność, że możesz  
aby prawidłowo obsługiwać maszynę, przed jej użyciem należy uważnie przeczytać niniejszą instrukcję  
eksploatacji i zachowaj ją prawidłowo do wykorzystania w przyszłości. Upewnij się, że przeczytałeś  
środki ostrożności i zasady bezpieczeństwa na tej stronie, aby zapewnić bezpieczne użytkowanie.  
instrukcja przedstawi ostrzeżenia i środki ostrożności dotyczące bezpieczeństwa, obsługi,  
konserwacji i czyszczenia. Ostrzeżenia i instrukcje omówione w tej  
Instrukcja nie jest w stanie objąć wszystkich możliwych warunków i sytuacji, jakie mogą wystąpić.  
Produkt ten nie jest produktem, który cechuje ostrożność i zdrowy rozsądek, ponieważ uważamy, że  
że użytkownicy będą przestrzegać tych kodeksów.

Przed użyciem urządzenia należy przeczytać WSZYSTKIE instrukcje.

1. Montaż musi być zgodny z poniższymi instrukcjami. Nieprawidłowy montaż może być  
zagrożenie. Podczas montażu należy nosić solidne rękawice robocze.
2. Nie przychodź na spotkania, jeśli jesteś zmęczony lub pod wpływem alkoholu, narkotyków lub leków.
3. Utrzymuj miejsce zgromadzenia w czystości i zapewnij dobre oświetlenie.
4. Przed każdym użyciem sprawdź. Nie używaj, jeśli części są luźne lub uszkodzone.

#### OSTRZEŻENIE:

- Ten produkt zawiera małe części. W przypadku połknięcia może dojść do zadławienia.  
zagrożenie. Trzymaj te małe części z dala od dzieci podczas montażu!

WSKAZÓWKI: Przed montażem opakowanie można położyć płasko na ziemi i  
produkt umieszczony w opakowaniu w celu montażu, w celu ochrony produktu.


Informacje o tym przedmiocie.

## Parametry związane z produktem

Model	PR-012-50	PR-010-50	PR-012-56	PR-014-60	PR-012-65	PR-03-60
Wstążka określony My	50 stóp	50 stóp	56FT	60FT	65 stóp 60	stóp
Sześć warstw lina drabina	1	1	1	1	1	
Miękka deska huśtać się	1	1	1	1	1	
Wspinaczka sieć	1	1	1	1	1	
Wspinaczka lina	/	/	/	1	/	
Narożnik buranko	1	/	/	1	1	
Gimnastyka c Trójkąt Pierścień	1	/	/	2	1	
Małpa nie ma	2	3	3	2	2	
Małpa pięść	2	3	3	2	2	
Gimnastyka c Koło	2	/	2	2	2	
Obracanie koło	1	1	1	1	1	
Całkowity ilość	12	10	12	14	12	/



PR-012-50

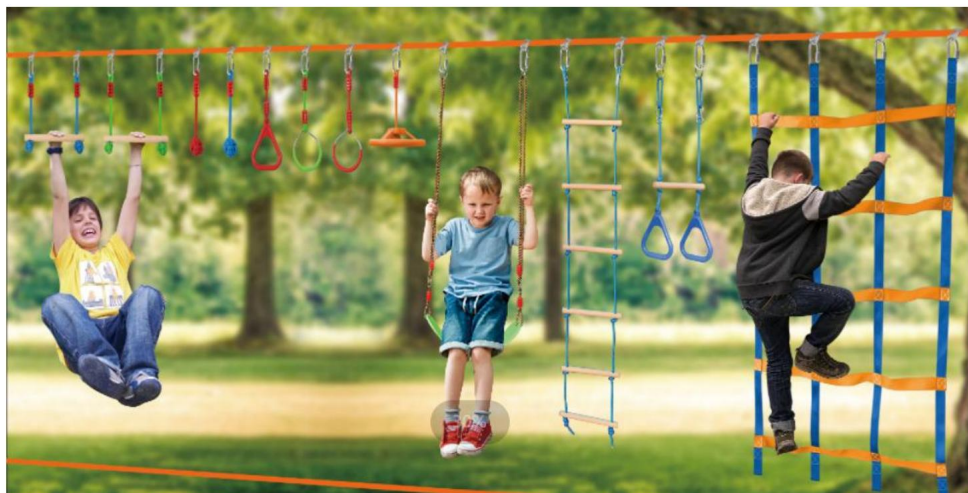

## Instrukcje instalacji



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-010-50



## Instrukcje instalacji



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.**

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



**Step 3: Install the main line and ratchet line on the installed tree protectors.**

**Step 4: Install the hanging buckles to the main line.**

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


**Step 5: Use the ratchet to tighten the main line of the slackline.**

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

**Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.**

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-56



## Instrukcje instalacji

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE



1 First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: Please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180°. At the same time, after hearing the 'bang', you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-014-60



## Instrukcje instalacji



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.




3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-65

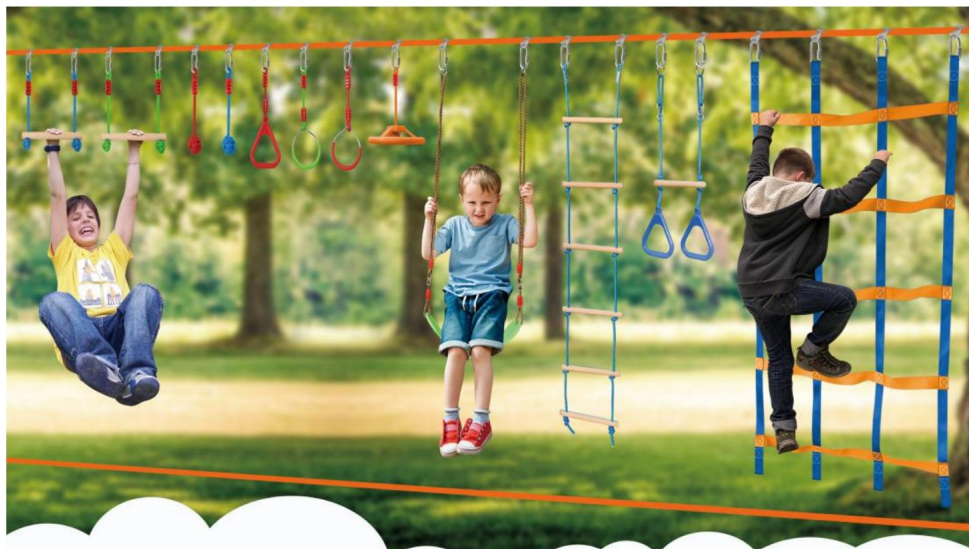

## Instrukcje instalacji



### • HOW TO SET UP A NINJA OBSTACLE COURSE

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure above and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-03-60



## Instrukcje instalacji



### • HOW TO SET UP A SLACKLINE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

#### Step 3: Attach the main line to a tree or solid post.

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

#### Step 5: How to use the slackline ratchet?

We introduced the use of ratchet on the right.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## CZYSZCZENIE I PRZECHOWYWANIE

1. Przetrzyj miękką, suchą ściereczką. Nigdy nie używaj ściernego środka czyszczącego ani szorstkiego gąbki. Przetrzyj czystą wodą. Utrzymuj produkt w suchości po czyszczeniu.
2. Dzieciom nie wolno wycierać produktu, aby uniknąć jego przewrócenia i upadku. urazy.
3. Po rozmontowaniu produktu należy odłożyć części i akcesoria razem.

Producent: Shanghaimuxinmuyeyouxiangongsi

Adres: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, szanghaj 200000 CN.


Importowane do AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD  
NSW 2122 Australia

Importowane do USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim  
Miejsce, Rancho Cucamonga, Kalifornia  
91730



YH CONSULTING LIMITED.

C/O YH Consulting Limited Biuro 147, Centurion  
Dom, London Road, Staines-upon-Thames,  
Surrey, TW18 4AX



E-CrossStu GmbH

Mainzer Landstr.69, 60329 Frankfurt nad Menem.

Wyprodukowano w Chinach

**VEVOR<sup>®</sup>**  
**TOUGH TOOLS, HALF PRICE**

Wsparcie techniczne i certyfikat gwarancji  
elektronicznej [www.vevor.com/support](http://www.vevor.com/support)





Technische ondersteuning en e-garantiecertificaat [www.vevor.com/support](http://www.vevor.com/support)

## **NINJA LIJN/SLACK LIJN KIT**

**MODEL:MODEL:PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60**

Wij streven er voortdurend naar om u gereedschappen tegen concurrerende prijzen te leveren.

"Save Half", "Half Price" of andere soortgelijke uitdrukkingen die wij gebruiken, geven alleen een schatting van de besparingen die u kunt behalen door bepaalde gereedschappen bij ons te kopen in vergelijking met de grote topmerken en betekent niet noodzakelijkerwijs dat alle categorieën gereedschappen die wij aanbieden, worden gedekt. Wij herinneren u eraan om zorgvuldig te controleren of u daadwerkelijk de helft bespaart in vergelijking met de grote topmerken wanneer u een bestelling bij ons plaatst.

# VEVOR<sup>®</sup>

TOUGH TOOLS, HALF PRICE

NINJA LIJN/  
SLACK LIJN KIT

MODEL: PR-012-50/PR-010-50/PR-012-56/

PR-014-60/PR-012-65/PR-03-60





#### HULP NODIG? NEEM CONTACT MET ONS OP!

Heeft u vragen over het product? Heeft u technische ondersteuning nodig? Neem dan gerust contact met

ons op: **Technische ondersteuning en E-garantiecertificaat**  
**[www.vevor.com/support](http://www.vevor.com/support)**

Dit is de originele instructie, lees alle handleidingen zorgvuldig door voordat u het product gebruikt. VEVOR behoudt zich een duidelijke interpretatie van onze gebruikershandleiding voor. Het uiterlijk van het product is afhankelijk van het product dat u hebt ontvangen. Vergeef ons dat we u niet opnieuw zullen informeren als er technologie- of software-updates voor ons product zijn.

	<p>Waarschuwing - Om het risico op letsel te verminderen, moet de gebruiker de volgende informatie lezen:</p> <p>Lees de gebruiksaanwijzing zorgvuldig door.</p>
	<p>Pas op dat uw handen niet bekneld raken.</p>

#### VEILIGHEIDSWAARSCHUWINGEN EN VOORZORGSMaatregelen

Bedankt voor het gebruiken van dit product. Om er zeker van te zijn dat u Gebruik de machine correct, lees deze instructies aandachtig door voordat u bediening en bewaar het goed voor toekomstige referentie. Lees het alstublieft zorgvuldig door de voorzorgsmaatregelen en veiligheidsregels op deze pagina om uw veilige gebruik te garanderen. Dit handleiding zal veiligheidswaarschuwingen en voorzorgsmaatregelen, bediening, onderhoud en reiniging schetsen. De waarschuwingen en instructies die in deze handleiding worden besproken. De handleiding kan niet alle mogelijke omstandigheden en situaties dekken die zich kunnen voordoen. Voorzichtigheid en gezond verstand zijn niet ingebouwd in dit product, omdat wij van mening zijn dat de toepassingen aan deze codes zullen voldoen.

#### **Lees ALLE instructies voordat u uw apparaat gebruikt.**

1. De montage moet volgens deze instructies worden uitgevoerd. Onjuiste montage kan een gevaar. Draag stevige werkhandschoenen tijdens de montage.
2. Kom niet bijeen als u moe bent of onder invloed van alcohol, drugs of medicijnen.
3. Zorg ervoor dat de verzamelplaats schoon en goed verlicht is.
4. Inspecteer voor elk gebruik. Gebruik het niet als onderdelen los of beschadigd zijn.

#### **WAARSCHUWING:**

- Dit product bevat kleine onderdelen. Als het wordt ingeslikt, kan dit verstikkingsgevaar opleveren. Gevaar. Houd deze kleine onderdelen uit de buurt van kinderen tijdens het monteren!


**TIPS:** Voor de installatie kan de verpakking plat op de grond worden gelegd en het product op de verpakking geplaatst voor montage om het product te beschermen. Over dit item.

## Productgerelateerde parameters

Model	PR-012- 50	PR-010- 50	PR-012- 56	PR-014- 60	PR-012- 65	PR-03- 60
Lintje gespecificeerd Wij	50FT	50FT	56FT	60FT	65FT 60FT	
Zes lagen touw ladder	1	1	1	1	1	
Zacht karton schoffel	1	1	1	1	1	
Klimmen het web	1	1	1	1	1	
Klimmen touw	/	/	/	1	/	
Hoek buranko	1	/	/	1	1	
Gymnastiek c Driehoek Ring	1	/	/	2	1	
Aap Dat is er niet	2	3	3	2	2	
Aap vuist	2	3	3	2	2	
Gymnastiek c Cirkel	2	/	2	2	2	
Roterend wiel	1	1	1	1	1	
Totaal hoeveelheid	12	10	12	14	12	/



## PR-012-50

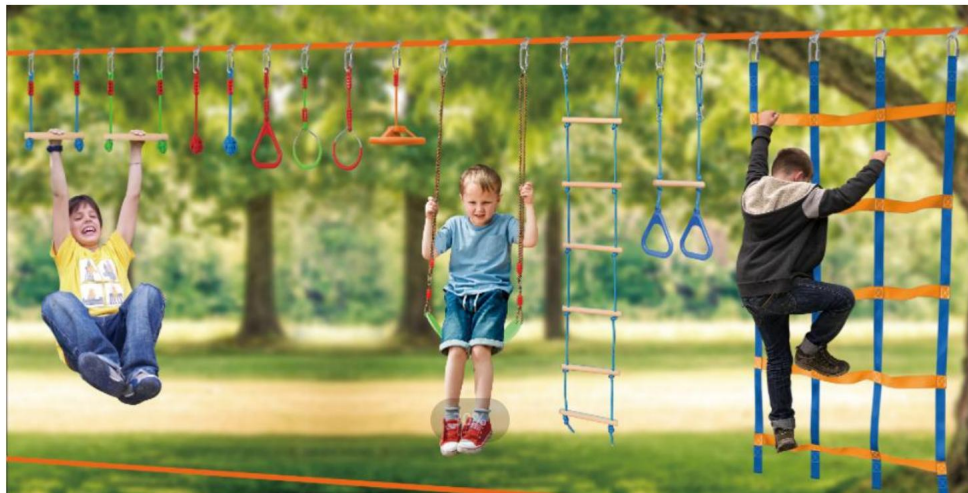

## Installatie-instructies



## ● HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees with boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## ● HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PR-010-50



## Installatie-instructies



## • HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m(7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## • HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



## PR-012-56



## Installatie-instructies



## • HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set the ninja line, two objects will be needed to tie it into place (typically trees).


## ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m(7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## • HOW TO USE THE RATCHET LINE




1 First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PR-014-60



## Installatie-instructies



## ● HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**



If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## ● HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



## PR-012-65



## Installatie-instructies



## • HOW TO SET UP A NINJA OBSTACLE COURSE

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure above and open the handle of the ratchet to about 180°. At the same time, after hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PR-03-60



## Installatie-instructies



## • HOW TO SET UP A SLACKLINE?

**Step 1: Where to Slackline?**

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

**▲ MATTERS NEEDING ATTENTION:**

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.****Step 3: Attach the main line to a tree or solid post.**

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

**Step 5: How to use the slackline ratchet?**

We introduced the use of ratchet on the right.


Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

## • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## REINIGING EN OPSLAG

1. Veeg af met een zachte, droge doek. Gebruik nooit een schurend reinigingsmiddel of een ruwe pad. Veeg af met schoon water. Houd het product droog na het reinigen.
2. Kinderen **mogen het product niet** afvegen om kantelen en vallen te voorkomen verwondingen.
3. Nadat het product is gedemonteerd, plaatst u de onderdelen en accessoires terug samen.

**Fabrikant: Shanghaimuxinmuyeyouxiangongsi**

**Adres: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.**

**Geïmporteerd naar AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australië**

**Geïmporteerd naar de VS: Sanven Technology Ltd. Suite 250, 9166 Anaheim Plaats, Rancho Cucamonga, CA 91730**



YH CONSULTING LIMITED.

C/O YH Consulting Limited Kantoor 147, Centurion  
Huis, London Road, Staines-upon-Thames,  
Surrey, TW18 4AX



E-CrossStu GmbH

Mainzer Landstr.69, 60329 Frankfurt am Main.

**Gemaakt in China**

**VEVOR<sup>®</sup>**  
**TOUGH TOOLS, HALF PRICE**

**Technische ondersteuning en e-  
garantiecertificaat [www.vevor.com/support](http://www.vevor.com/support)**



# **VEVOR<sup>®</sup>**

## **TOUGH TOOLS, HALF PRICE**

Teknisk support och e-garanticertifikat [www.vevor.com/support](http://www.vevor.com/support)

### **NINJA LINE/SLACK LINE KIT**

**MODELL:MODEL:PR-012-50/PR-010-50/PR-012-56/  
PR-014-60/PR-012-65/PR-03-60**

Vi fortsätter att vara engagerade i att ge dig verktyg till konkurrenskraftiga priser.

"Spara hälften", "halva priset" eller andra liknande uttryck som används av oss representerar bara en uppskattning av besparingar du kan dra nytta av att köpa vissa verktyg hos oss jämfört med de stora toppmärkena och betyder inte nödvändigtvis att täcka alla kategorier av verktyg som erbjuds av oss. Du påminns vänligen om att noggrant kontrollera när du gör en beställning hos oss om du faktiskt sparar hälften i jämförelse med de främsta stora varumärkena.


# VEVOR<sup>®</sup>

TOUGH TOOLS, HALF PRICE

NINJA LINE/  
SLACK LINE KIT

MODELL: PR-012-50/PR-010-50/PR-012-56/

PR-014-60/PR-012-65/PR-03-60

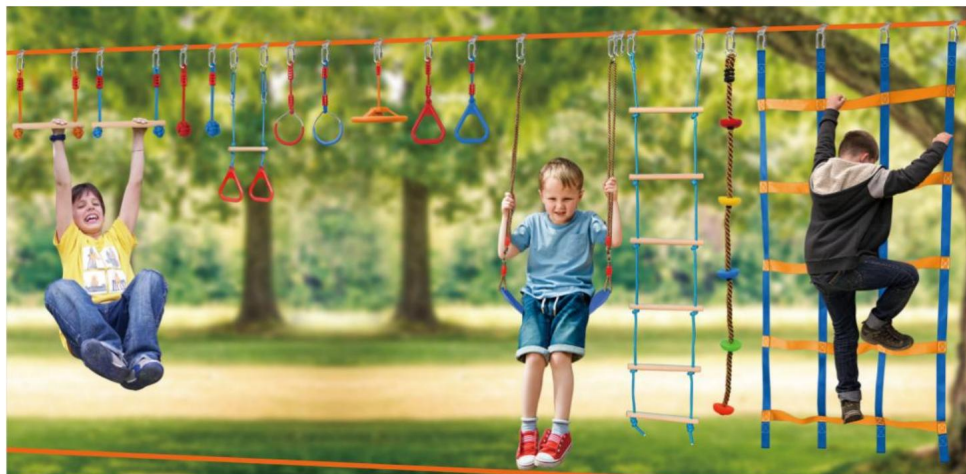



## BEHÖVER HJÄLP? KONTAKTA OSS!

Har du produktfrågor? Behöver du teknisk support? Kontakta oss gärna: **Teknisk support och e-**

**garanticertifikat [www.vevor.com/support](http://www.vevor.com/support)**

Detta är den ursprungliga instruktionen, läs alla instruktioner noggrant innan du använder den. VEVOR reserverar sig för en tydlig tolkning av vår användarmanual. Utseendet på produkten är beroende av den produkt du fått. Ursäkra oss att vi inte kommer att informera dig igen om det finns någon teknik eller mjukvaruuppdateringar på vår produkt.

	Varning - För att minska risken för skada måste användaren läsa bruksanvisningen noggrant.
	Var noga med att nypa händerna.

### SÄKERHETSVARNINGAR OCH FÖRSIKTIGHETSÅTGÄRDER

Tack för att du använder den här produkten. För att vara säker på att du kan använda maskinen på rätt sätt, läs denna instruktion noggrant innan drift och förvara den på rätt sätt för framtida referens. Se till att läsa försiktighetsåtgärderna och säkerhetsreglerna på denna sida för att säkerställa din säkra användning. Detta manualen kommer att beskriva säkerhetsvarningar och försiktighetsåtgärder, drift, underhåll och rengöring. Varningarna och instruktionerna som granskas i denna manualen kan inte täcka alla möjliga förhållanden och situationer som kan uppstå. Försiktighet och sunt förnuft är inte inbyggt i denna produkt, eftersom vi tror att användningarna kommer att följa dessa koder.

#### **Läs ALLA instruktioner innan du använder din maskin.**

1. Montering måste följa dessa instruktioner. Felaktig montering kan vara en fara. Använd kraftiga arbetshandskar vid montering.
2. Sätt dig inte ihop när du är trött eller påverkad av alkohol, droger eller mediciner.
3. Håll monteringsområdet rent och väl upplyst.
4. Inspektera före varje användning. Använd den inte om delar är lösa eller skadade.

#### **WARNING:**

- Denna produkt innehåller små delar. Om den sväljs kommer den att utgöra en kvävning fara. Håll dessa små delar borta från barn när du monterar dem!


**TIPS:** Innan installationen kan förpackningen läggas plant på marken och produkten placeras på förpackningen för montering för att skydda produkten. Om denna artikel.

## Produktrelaterade parametrar

Modell	PR-012- 50	PR-010- 50	PR-012- 56	PR-014- 60	PR-012- 65	PR-03- 60
Band specificeras vi	50FT	50FT	56FT	60FT	65FT 60FT	
Sex lager rep stege	1	1	1	1	1	
Mjuk bräda svänga	1	1	1	1	1	
Klättrande webben	1	1	1	1	1	
Klättrande rep	/	/	/	1	/	
Hörn buranko	1	/	/	1	1	
Gymnasti c Triangel Ringa	1	/	/	2	1	
Apa <small>det finns inte</small>	2	3	3	2	2	
Apa <small>knytnäve</small>	2	3	3	2	2	
Gymnasti c Cirkel	2	/	2	2	2	
Roterande hjul	1	1	1	1	1	
Total kvantitet	12	10	12	14	12	/



## PR-012-50

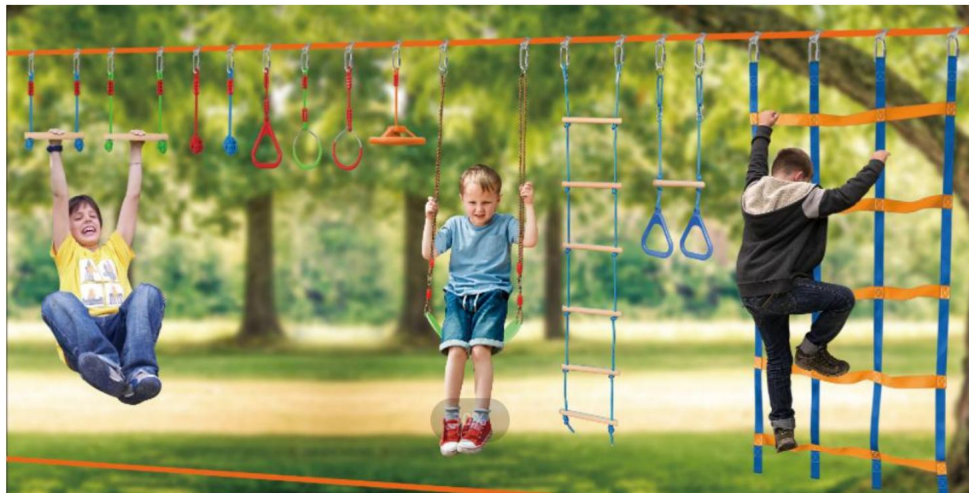

## Installationsanvisningar



## ● HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees with rot, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended**

**to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## ● HOW TO USE THE RATCHET LINE



1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PR-010-50



## Installationsanvisningar



## ● HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).

## ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m(7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.


## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

## Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## ● HOW TO USE THE RATCHET LINE




1 First, close the ratchet and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



## PR-012-56



## Installationsanvisningar

## • HOW TO SET UP A NINJA OBSTACLE COURSE?

## Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


## ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

## Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



## Step 3: Install the main line and ratchet line on the installed tree protectors.

## Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

## Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: If you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

## • HOW TO USE THE RATCHET LINE



1 First, close the ratchet, and thread the webbing through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2 Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: Please make sure your ratchet is closed when it is finally tightened.



3 When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the 'bang', you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

PR-014-60



## Installationsanvisningar



### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ⚠ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**



If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

#### Step 6: Use contact buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.




3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)



PR-012-65

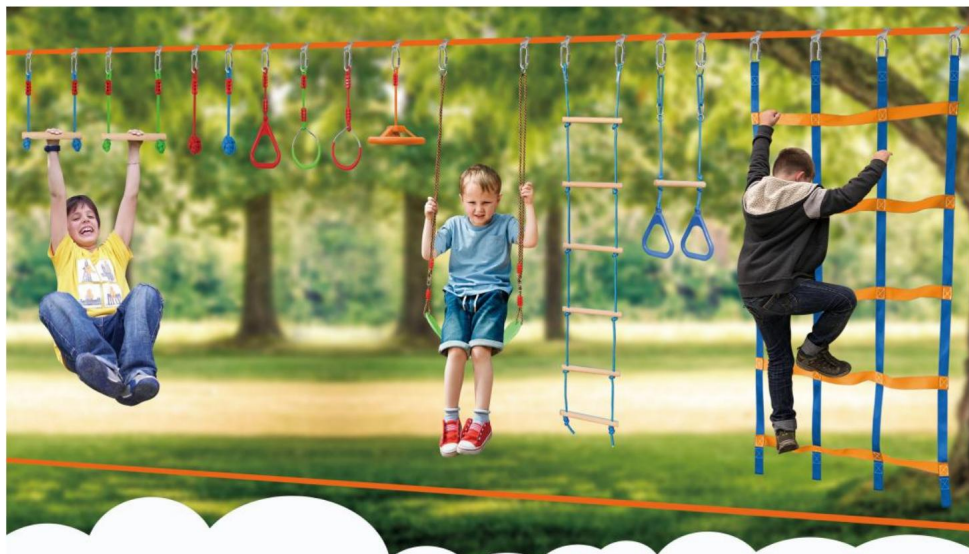

## Installationsanvisningar

### • HOW TO SET UP A NINJA OBSTACLE COURSE?

#### Step 1: Where to Slackline?

Picking a place to slackline is mostly based on personal preference. To set up the ninja line, two objects will be needed to tie it into place (typically trees).


#### ▲ MATTERS NEEDING ATTENTION:

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, please contact us.

#### Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.

**Installation height: more than 2.2m (7.2ft) is recommended**

Of course, this value is not absolute. You can appropriately adjust the installation height of the slackline according to your child's height.



#### Step 3: Install the main line and ratchet line on the installed tree protectors.

#### Step 4: Install the hanging buckles to the main line.

**It is recommended to install a hanging buckle every 11.8-15.8in.**

If you are unable to determine the exact location during installation. You can straighten the main line and put it on the ground. Then measure with a tape measure and mark on the main line with a marker pen.

#### Step 5: Use the ratchet to tighten the main line of the slackline.

Tip: if you need to adjust the position of your hanging buckles, you must loosen the ratchet line before adjustment. Because the friction between the buckles and the main line is very large when the main line is tightened, you can't adjust the position of the hanging buckles.

Step 6: Use connect buckles to hang all accessories on the hanging buckle and tighten it.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your ninja slackline kit as much as possible. Have fun!

### • HOW TO USE THE RATCHET LINE




1. First, close the ratchet and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure upward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open The ratchet is closed

Technical Support and E-Warranty Certificate [www.vevor.com/support](http://www.vevor.com/support)

## PR-03-60



## Installationsanvisningar



## • HOW TO SET UP A SLACKLINE?

**Step 1: Where to Slackline?**

Picking a place to slackline is mostly based on personal preference. To set up the ninjaline, two objects will be needed to tie it into place (typically trees).

**▲ MATTERS NEEDING ATTENTION:**

Do not use buildings or playground structures (unless specifically built for slackline), live power/telephone poles, dead trees or stumps, trees with rot, disease, structural cracks, excessive lean, exposed roots, or trees in boggy, wet, sandy, loose soil. This is only a partial list. You must use your good judgment in determining what is not an appropriate anchor point. If in doubt, contact us.

**Step 2: Install tree protectors. It can not only protect trees, but also reduce the wear of slackline.****Step 3: Attach the main line to a tree or solid post.**

**Installation height:** Generally, we recommend that the installation height difference of two slackline be slightly less than: your child's height + half of the length of the balance belt, and the slackline at the bottom is about 23.6in from the ground. Of course, you can adjust the height according to your actual situation.



**Step 4: Attach the ratchet line to another tree or solid post.** Put the ratchet protector on first. Then use the ratchet to tighten the main line of the slackline. Cover the protective sleeve onto the ratchet again. (The protective sleeve is used for 2-inch slackline.)

**Step 5: How to use the slackline ratchet?**

We introduced the use of ratchet on the right.

Please note that after installing the accessories, you need to test their reliability. We sincerely hope you enjoy your slackline kit as much as possible. Have fun!

## • HOW TO USE THE RATCHET LINE?



1. First, close the ratchet, and thread the webbing go through the upper hole in the middle of the ratchet. If the position of the hole is not above, it can be adjusted to the top by opening and closing the ratchet.

2. Pull the webbing down until it is as tight as possible. Then tighten the webbing with one hand and hold the handle of the ratchet with the other hand. Tighten the webbing by continuously opening and closing the ratchet. Until you can't pull the handle of the ratchet. Note: please make sure your ratchet is closed when it is finally tightened.



3. When you are ready to stow the slackline kit, you can pull the switch marked in the figure outward and open the handle of the ratchet to about 180° at the same time. After hearing the "bang", you can pull the webbing out of the ratchet and put it away.



The ratchet is open

The ratchet is closed

Technical Support and E-Warranty  
Certificate [www.vevor.com/support](http://www.vevor.com/support)

## RENGÖRING OCH FÖRVARING

1. Torka av med en mjuk, torr trasa. Använd aldrig ett slipande rengöringsmedel eller en hård pad. Torka av med rent vatten. Håll produkten torr efter rengöring.
2. Barn **får inte** torka av produkten för att undvika att den tippas och ramlar skador.
3. Efter att produkten har tagits isär, vänligen sätt i delarna och tillbehören tillsammans.

**Tillverkare: Shanghaimuxinmuyeyouxiangongsi**

**Adress: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.**

**Importerad till AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australien**

**Importerad till USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730**



**YH CONSULTING LIMITED.**

**C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX**



**E-CrossStu GmbH**

**Mainzer Landstr.69, 60329 Frankfurt am Main.**

**Tillverkad i Kina**

**VEVOR<sup>®</sup>**  
**TOUGH TOOLS, HALF PRICE**

**Teknisk support och e-garanticertifikat**  
**[www.vevor.com/support](http://www.vevor.com/support)**