VEVOR®

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate

www.vevor.com/support


PVC LIQUID TIGHT CONDUIT INSTRUCTION

We continue to be committed to provide you tools with competitive price. "Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

SPECIFICATION：PLFNCB-1/2，PLFNCB-3/4， PLFNCB-1

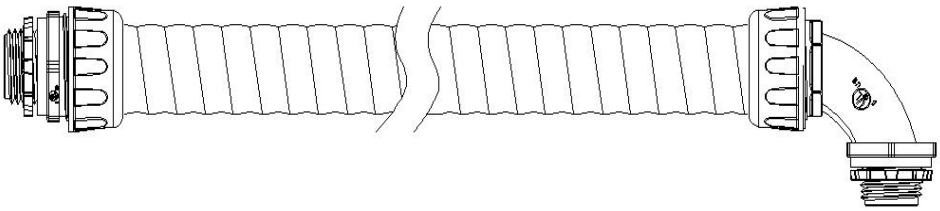

(The picture is for reference only, please refer to the actual object)

NEED HELP? CONTACT US!


Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

INSTRUCTIONS

1、Drawing

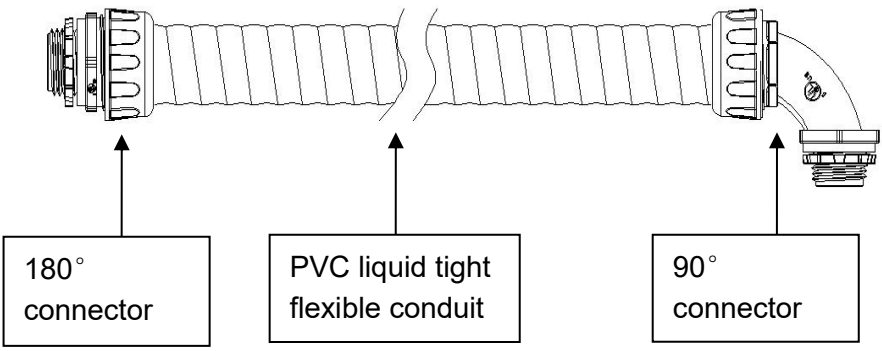

2、List of accessories


	Accessory	Qty	Picture
1	180°connector	5 PCS	
2	PVC Liquid tight flexible conduit	30.48 M （100ft）	
3	90°connector	5 PCS	

3、Technical specification

1	Model	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Inch	1/2”	3/4”	1”
	I.D.	ID:15.80~16.31	ID:20.83~21.34	ID:26.44~27.08
	O.D.	OD:20.83~21.34	OD:26.16~26.67	OD:32.77~33.40
3	Length(m)	30.48（100ft）		
4	Certificate	UL1660 (NO.：E473661)		
5	IP	IP65		
6	Flexibility	Medium		
7	Fire retardant	VW-1		
8	Temperature range	-20℃~60℃		
9	Color	Grey		
10	RoHS	Yes		

4、Bill of Material

4.1 180° connector exploded view：

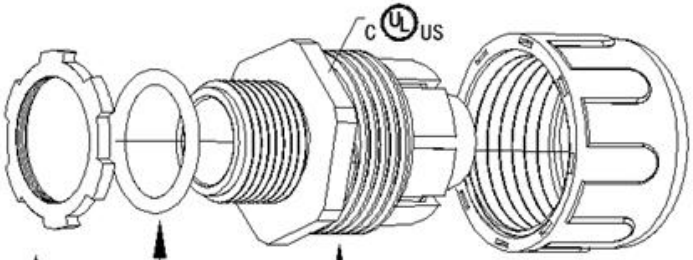

Lock nut,
Material: PA
Color: grey

Nut Material:
carbon steel
Galvanize surface


Seal ring
Material: rubber
Color: black

Centrebody
Material: PA
Color: grey

4.2 90° connector exploded view：

Centrebody
Material: PA
Color: grey


Lock nut,
Material: PA
Color: grey

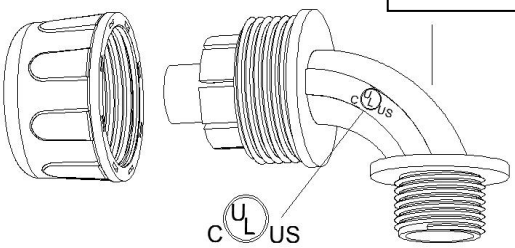

Seal ring
Material: rubber
Color: black

Nut Material:
carbon steel
Galvanize

4.3 PVC liquid tight flexible conduit profile ：



5、Assembly instruction

5.1 Loose the nut
5.2 Insert the conduit into the bottom of the connector
5.3 Lock the nut



5.1



5.2



5.3

6、Main function

Protect wire and cable, waterproof, moisture-proof, flame retardant, wear-resistant, pressure resistant, dust resistant, weather resistant, soft and flexible, oil resistant and so on. Suitable for all kinds of residential and commercial buildings, industrial and mining plants, machinery wiring and other places.

7、Notes:

7.1 Avoid use and installation out of temperature range and the fire source environment.
7.2 Trim the edges inside and outside of the conduit before assembly
7.3 When assembling, try to insert the conduit into the bottom of the connector and lock the nut.
7.4 Conduit and connectors are only suitable for wire and cable protection, not for other purposes.

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate

www.vevor.com/support

VEVOR®

TOUGH TOOLS, HALF PRICE

Technique Assistance et certificat de garantie électronique

www.vevor.com/support

PVC ÉTANCHE AUX LIQUIDES


INSTRUCTION SUR les CONDUITS

We continue to be committed to provide you tools with competitive price.
"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

SPÉCIFICATION : PLFNCB- 1/2 ,PLFNCB- 3/4 , PLFNCB- 1

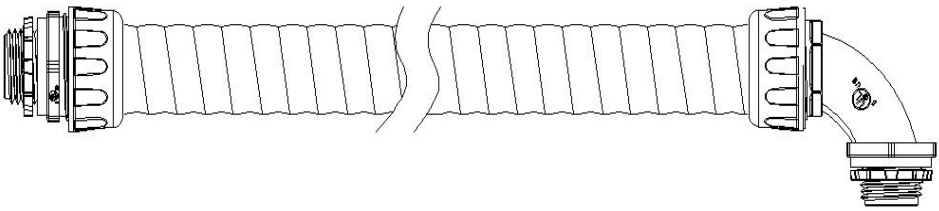

(L'image est uniquement à titre de référence, veuillez vous référer à l'objet réel)


NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

8、Dessin

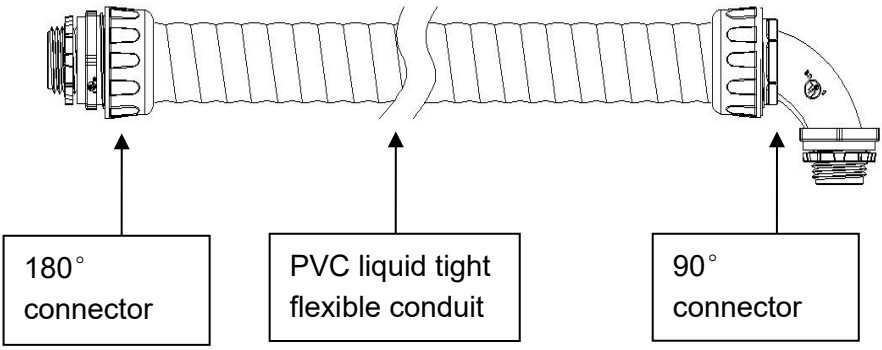

9、Liste des accessoires


	Accessoire	Quantité	Image
1	Connecteur 180°	5 PIÈCES	
2	Conduit flexible étanche aux liquides en PVC	30,48 millions （100 pieds）	
3	Connecteur 90°	5 PIÈCES	

10、Spécifications techniques

1	Modèle	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Pouce	1/2"	3/4"	1"
	IDENTIFIANT	ID:15h80 ~ 16h31	ID:20.83~21.34	ID:26.44~27.08
	DO	OD:20,83 ~ 21,34	DE:26,16 ~ 26,67	DE:32,77 ~ 33,40
3	Longueur (m)	30,48 （100 pieds）		
4	Certificat	UL1660 (N° : E473661)		
5	IP	IP65		
6	La flexibilité	Moyen		
7	Retardateur de flamme	VW-1		
8	Écart de température	-20 ℃ ~ 60 ℃		
9	Couleur	Gris		
dix	RoHS	Oui		

11、Nomenclature

4.1 Vue éclatée du connecteur 180°：

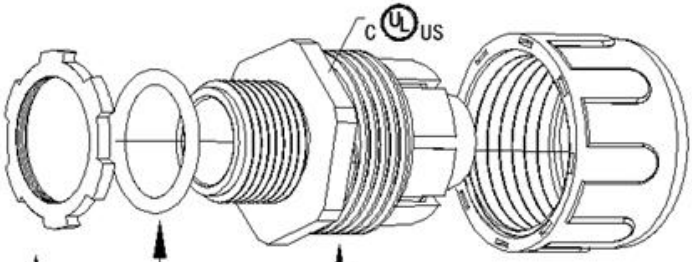

Lock nut,
Material: PA
Color: grey


Nut Material:
carbon steel
Galvanize surface

Seal ring
Material: rubber
Color: black

Centrebody
Material: PA
Color: grey

4.2 Vue éclatée du connecteur 90°：

Centrebody
Material: PA
Color: grey

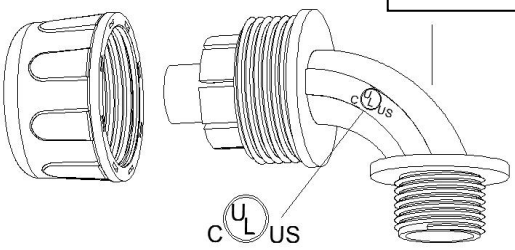


Lock nut,
Material: PA
Color: grey

Seal ring
Material: rubber
Color: black

Nut Material:
carbon steel
Galvanize

4.3 Profil de conduit flexible étanche aux liquides en PVC ：



12、instructions de montage

5.1 Desserrer l'écrou
5.2 Insérez le conduit dans le bas du connecteur
5.3 Verrouiller l'écrou



5.1



5.2



5.3

13、Fonction principale

Protège les fils et les câbles, imperméables, résistants à l'humidité, ignifuges, résistants à l'usure, résistants à la pression, résistants à la poussière, résistants aux intempéries, doux et flexibles, résistants à l'huile, etc. Convient à tous types de bâtiments résidentiels et commerciaux, d'installations industrielles et minières, de câblage de machines et autres lieux.

14、Remarques:

7.1 Évitez l'utilisation et l'installation hors de la plage de température et de l'environnement de la source d'incendie .

7.2 Couper les bords intérieurs et extérieurs du conduit avant l'assemblage
7.3 Lors de l'assemblage, essayez d'insérer le conduit dans le bas du connecteur et verrouillez l'écrou.
7.4 Les conduits et les connecteurs conviennent uniquement à la protection des fils et des câbles, et non à d'autres fins .

Adresse : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghai 200000 CN.
Importé en Australie : SIHAO PTY LTD, 1 ROKEVA STREETASTWOOD NSW 2122 Australie
Importé aux États-Unis : Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Technique Assistance et certificat de garantie électronique

www.vevor.com/support

VEVOR®

TOUGH TOOLS, HALF PRICE

Technisch Support- und E-Garantiezertifikat

www.vevor.com/support

PVC FLÜSSIGKEITSDICHT


Leitungsanweisung

We continue to be committed to provide you tools with competitive price.
"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

SPEZIFIKATION: PLFNCB- 1/2 , PLFNCB- 3/4 , PLFNCB- 1

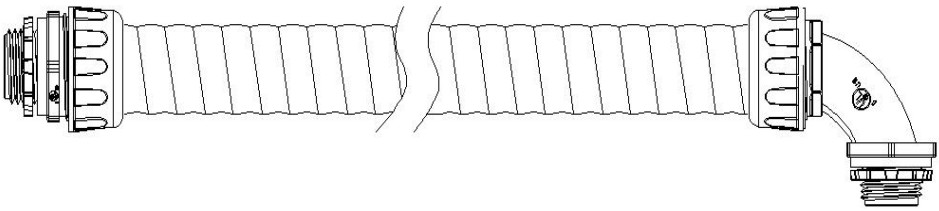

(Das Bild dient nur als Referenz, bitte beziehen Sie sich auf das tatsächliche Objekt)


NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

15、Zeichnung

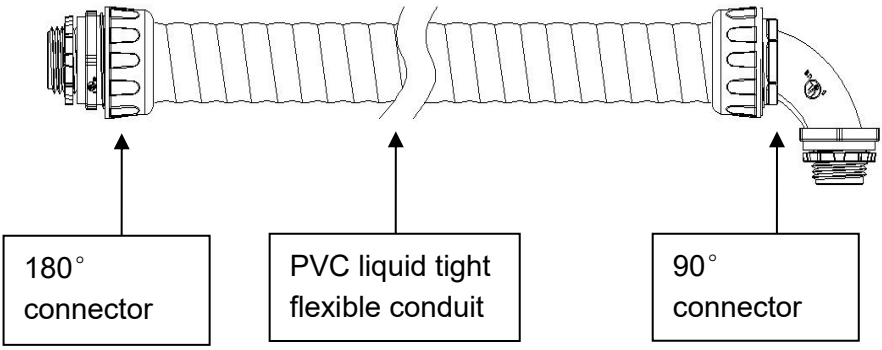

16、Liste des Zubehörs


	Zubehörteil	Menge	Bild
1	180°-Stecker	5 STÜCK	
2	Flüssigkeitsdichtes, flexibles PVC-Kabel	30,48 Mio (100 Fuß)	
3	90°-Stecker	5 STÜCK	

17、Technische Spezifikation


1	Modell	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Zoll	1/2"	3/4"	1"
	AUSWEIS	ID: 15,80 ~ 16,31	ID:20,83~21,34	ID:26.44~27.08
	OD	Außendurchmesser: 20,83–21,34	Außendurchmesser: 26,16–26,67	Außendurchmesser: 32,77–33,40
3	Länge (m)	30,48 (100 Fuß)		
4	Zertifikat	UL1660 (NR.:E473661)		
5	IP	IP65		
6	Flexibilität	Mittel		
7	Feuerdämmend	VW-1		
8	Temperaturbereich	-20℃~60℃		
9	Farbe	Grau		
10	RoHS	Ja		

18、Stückliste


4.1 Explosionszeichnung des 180°-Steckers:

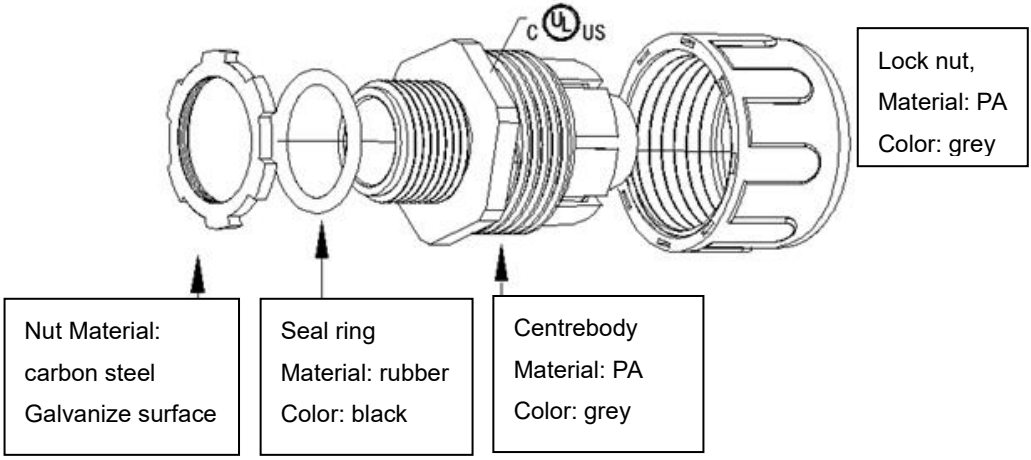

4.2 Explosionszeichnung des 90°-Stec

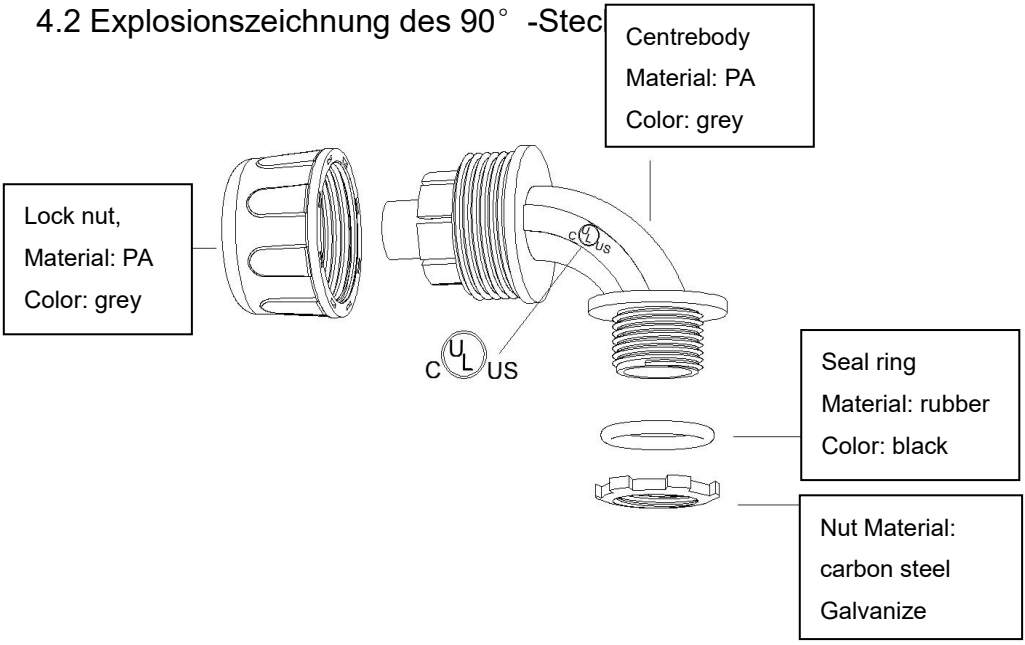

4.3 Flüssigkeitsdichtes flexibles Leitungsprofil aus PVC:



19、Bauanleitung

5.1 Lösen Sie die Mutter
5.2 Führen Sie die Leitung in die Unterseite des Anschlusses ein
5.3 Mutter kontern



5.1



5.2



5.3

20、Hauptfunktion

Schützen Sie Drähte und Kabel, wasserdicht, feuchtigkeitsbeständig, flammhemmend, verschleißfest, druckbeständig, staubbeständig, wetterbeständig, weich und flexibel, ölbeständig und so weiter. Geeignet für alle Arten von Wohn- und Gewerbegebäuden, Industrie- und Bergbauanlagen, Maschinenverkabelungen und andere Orte.

21、Anmerkungen:

7.1 Vermeiden Sie die Verwendung und Installation außerhalb des Temperaturbereichs und der Brandherdumgebung .
vor dem Zusammenbau die Kanten innen und außen am Kabelkanal ab

7.3 Versuchen Sie beim Zusammenbau, die Leitung in die Unterseite des Anschlusses einzuführen und die Mutter zu sichern.
7.4 Leitungen und Anschlüsse sind nur zum Schutz von Drähten und Kabeln geeignet, nicht für andere Zwecke .

Adresse : Shuangchenglu 803nong11hao1602A-1609shi, Baoshanqu, Shanghai 200000 CN.
Importiert nach AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australien
In die USA importiert: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Technisch Support- und E-Garantiezertifikat

www.vevor.com/support

VEVOR®

TOUGH TOOLS, HALF PRICE

Tecnico Supporto e certificato di garanzia elettronica

www.vevor.com/support

PVC A TENUTA STAGNA


ISTRUZIONI per IL CONDOTTO

We continue to be committed to provide you tools with competitive price.
"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

SPECIFICA: PLFNCB- 1/2 , PLFNCB- 3/4 , PLFNCB- 1

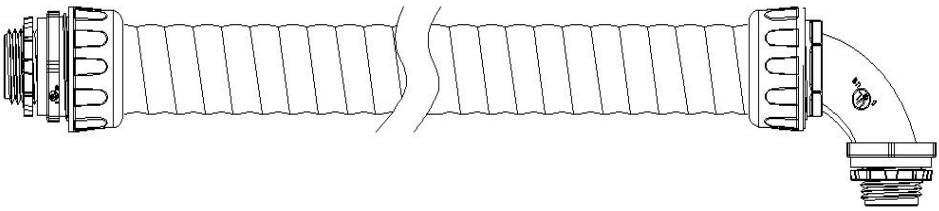

(L'immagine è solo di riferimento, fare riferimento all'oggetto reale)


NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

22、Disegno

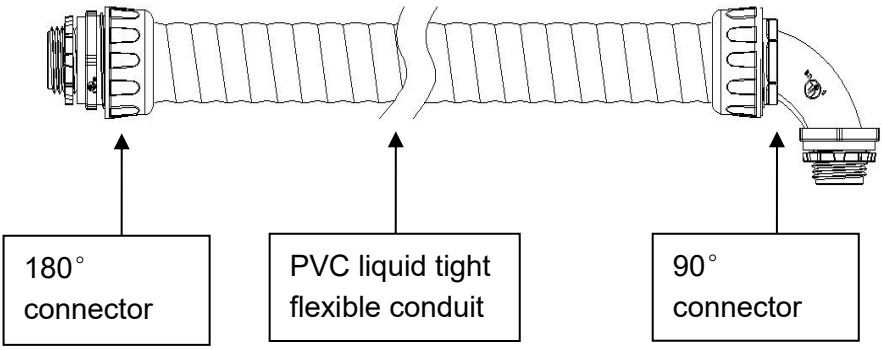

23、Elenco degli accessori


	Accessorio	Qtà	Immagine
1	Connettore 180°	5 PZ	
2	Guaina flessibile in PVC a tenuta di liquidi	30,48 M （100 piedi）	
3	Connettore a 90°	5 PZ	

24、Specifica tecnica


1	Modello	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Pollice	1/2"	3/4”	1"
	ID	ID:15.80~16.31	ID:20.83~21.34	ID:26.44~27.08
	OD	DE:20.83~21.34	DE:26.16~26.67	DE:32,77~33,40
3	Lunghezza (m)	30,48 （100 piedi）		
4	Certificato	UL1660 (N.:E473661)		
5	IP	IP65		
6	Flessibilità	medio		
7	Ignifugo	VW-1		
8	Intervallo di temperatura	-20℃~60℃		
9	Colore	Grigio		
10	RoHS	SÌ		

25、Distinta base


4.1 Vista esplosa del connettore a 180°：

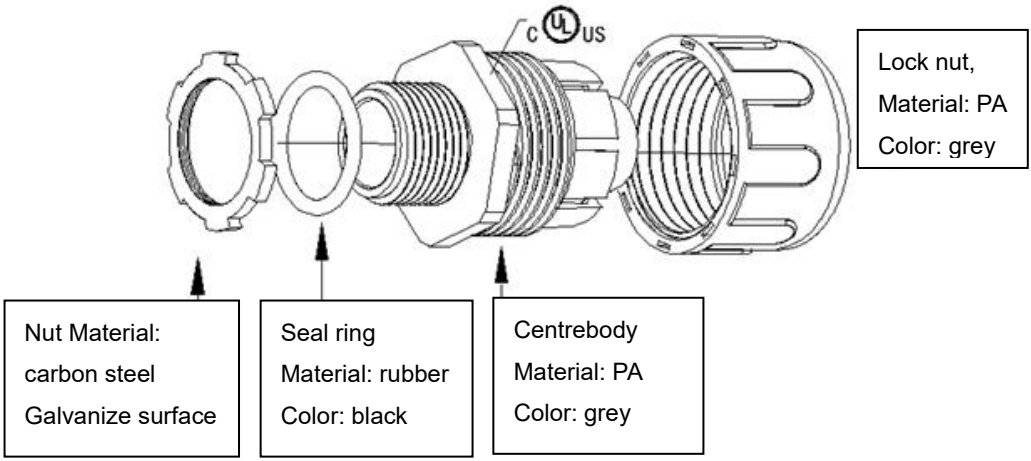

4.2 Vista esplosa del connettore a 90°：

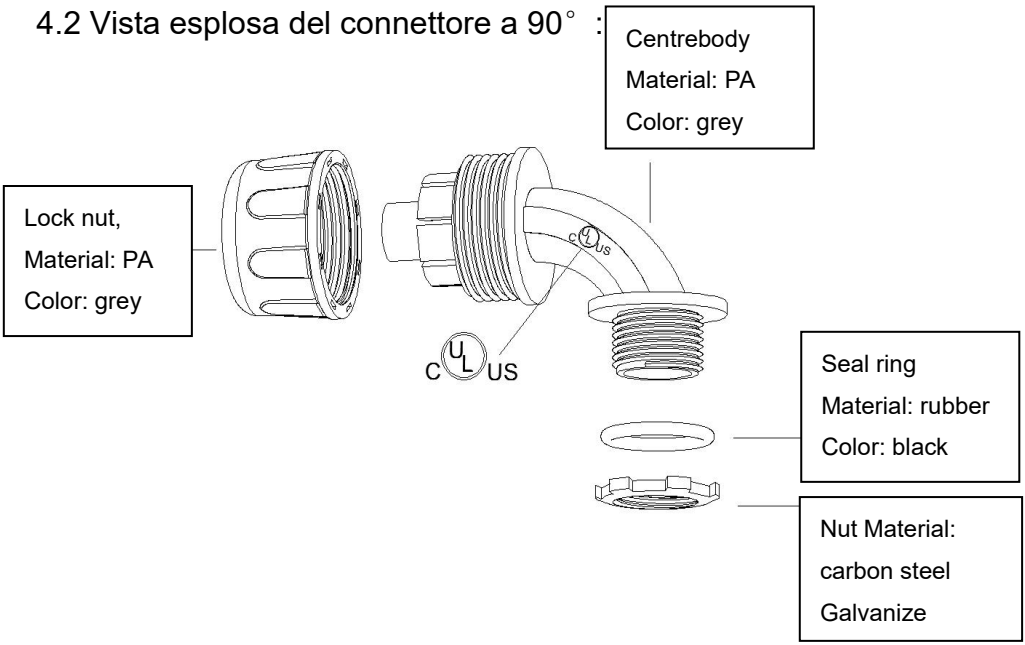

4.3 Profilo del condotto flessibile a tenuta di liquidi in PVC:



26、istruzioni di assemblaggio

5.1 Allentare il dado
5.2 Inserire il condotto nella parte inferiore del connettore
5.3 Bloccare il dado



5.1



5.2



5.3

27、Funzione principale

Proteggi fili e cavi, impermeabile, resistente all'umidità, ignifugo, resistente all'usura, resistente alla pressione, resistente alla polvere, resistente agli agenti atmosferici, morbido e flessibile, resistente all'olio e così via. Adatto a tutti i tipi di edifici residenziali e commerciali, impianti industriali e minerari, cablaggi di macchinari e altri luoghi.

28、Appunti:

7.1 Evitare l'uso e l'installazione al di fuori dell'intervallo di temperatura e dell'ambiente in cui è stata generata l'incendio .
7.2 Tagliare i bordi interni ed esterni del condotto prima del montaggio
7.3 Durante il montaggio, provare ad inserire il condotto nella parte inferiore del connettore e bloccare il dado.

7.4 Condutture e connettori sono adatti solo per la protezione di fili e cavi, non per altri scopi .

Indirizzo : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Importato in AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Importato negli Stati Uniti: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Tecnico Supporto e certificato di garanzia elettronica

www.vevor.com/support

VEVOR®

TOUGH TOOLS, HALF PRICE

Técnico Certificado de soporte y garantía electrónica

www.vevor.com/support

PVC HERMÉTICO A LÍQUIDOS


Instrucción DE CONDUCTO

We continue to be committed to provide you tools with competitive price.
"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

ESPECIFICACIÓN: PLFNCB- 1/2 , PLFNCB- 3/4 , PLFNCB- 1

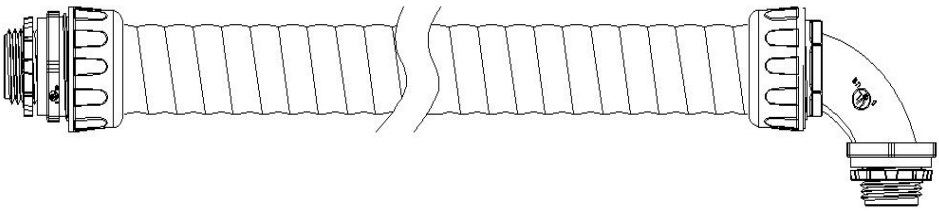

(La imagen es solo para referencia, consulte el objeto real)


NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

29、Dibujo

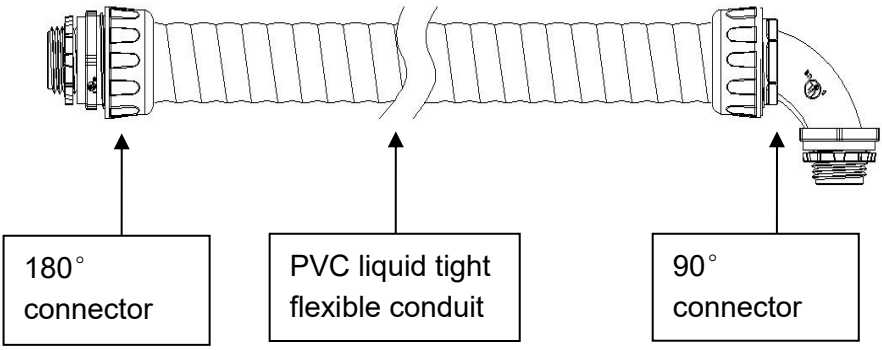

30、Lista de accesorios


	Accesorio	Cantidad	Imagen
1	conector de 180°	5 piezas	
2	Conducto flexible hermético de PVC	30,48 millones (100 pies)	
3	conector de 90°	5 piezas	

31、Especificación técnica

1	Modelo	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Pulgada	1/2”	3/4”	1”
	IDENTIFICACIÓN	Identificación: 15,80 ~ 16,31	Identificación: 20,83 ~ 21,34	ID:26.44~27.08
	sobredosis	Diámetro exterior: 20,83 ~ 21,34	Diámetro exterior: 26,16 ~ 26,67	Diámetro exterior: 32,77 ~ 33,40
3	Longitud (m)	30,48 (100 pies)		
4	Certificado	UL1660 (NO.:E473661)		
5	IP	IP65		
6	Flexibilidad	Medio		
7	Retardante de fuego	VW-1		
8	Rango de temperatura	-20 ℃ ~ 60 ℃		
9	Color	Gris		
10	RoHS	Sí		

32、Lista de materiales

4.1 Vista despiezada del conector de 180°：

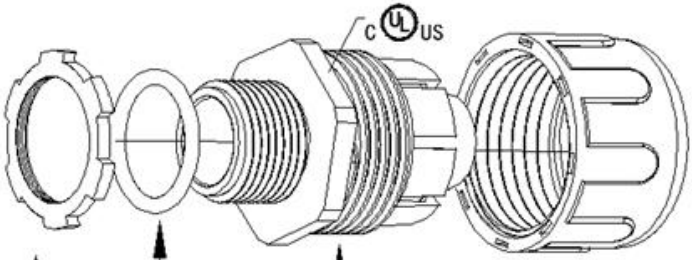

Lock nut,
Material: PA
Color: grey

Nut Material:
carbon steel
Galvanize surface


Seal ring
Material: rubber
Color: black

Centrebody
Material: PA
Color: grey

4.2 Vista despiezada del conector de 90

Centrebody
Material: PA
Color: grey


Lock nut,
Material: PA
Color: grey

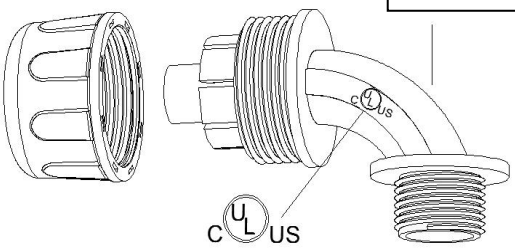

Seal ring
Material: rubber
Color: black

Nut Material:
carbon steel
Galvanize

4.3 Perfil de conducto flexible hermético a líquidos de PVC:



33、instrucciones de ensamblaje

5.1 Aflojar la tuerca
5.2 Inserte el conducto en la parte inferior del conector.
5.3 Bloquear la tuerca



5.1



5.2



5.3

34、Función principal

Proteja alambres y cables, impermeables, a prueba de humedad, retardantes de llama, resistentes al desgaste, resistentes a la presión, resistentes al polvo, resistentes a la intemperie, suaves y flexibles, resistentes al aceite, etc. Adecuado para todo tipo de edificios residenciales y comerciales, plantas industriales y mineras, cableado de maquinaria y otros lugares.

35、Notas:

7.1 Evite el uso y la instalación fuera del rango de temperatura y del entorno de la fuente de fuego .

7.2 Recorte los bordes interiores y exteriores del conducto antes del montaje
7.3 Al realizar el montaje, intente insertar el conducto en la parte inferior del conector y bloquee la tuerca.
7.4 Los conductos y conectores solo son adecuados para protección de alambres y cables, no para otros fines .

Dirección : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Importado a AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Importado a EE. UU.: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Técnico Certificado de soporte y garantía electrónica

www.vevor.com/support

VEVOR®

TOUGH TOOLS, HALF PRICE

Techniczny Certyfikat wsparcia i e-gwarancji

www.vevor.com/support

SZCZELNE PCV


INSTRUKCJA przewodu

We continue to be committed to provide you tools with competitive price.
"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

SPECYFIKACJA: PLFNCB- 1/2 ,PLFNCB- 3/4 ,PLFNCB- 1

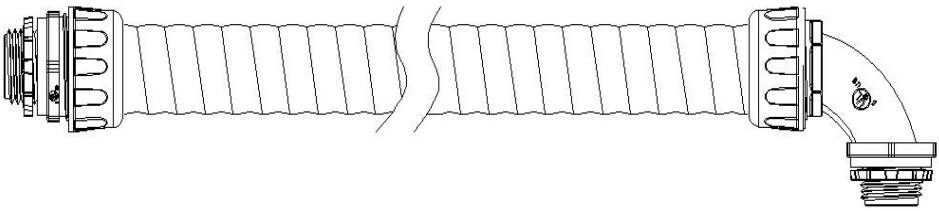

(Zdjęcie ma charakter wyłącznie poglądowy, proszę zapoznać się z rzeczywistym obiektem)


NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

36、Rysunek

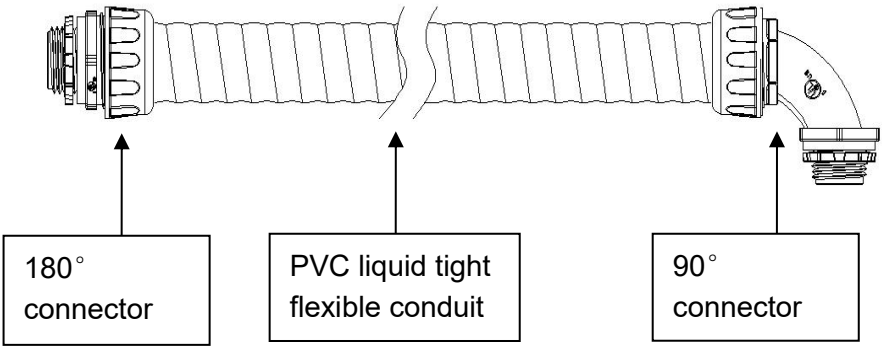

37、Lista akcesoriów


	Akcesorium	Ilość	Zdjęcie
1	Złącze 180°	5 szt	
2	Elastyczny przewód PVC, wodoszczelny i elastyczny	30,48 mln （100 stóp）	
3	Złącze 90°	5 szt	

38、Specyfikacja techniczna

1	Model	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Cal	1/2”	3/4”	1”
	ID	ID: 15,80 ~ 16,31	ID: 20,83 ~ 21,34	ID: 26,44 ~ 27,08
	OD	OD: 20,83 ~ 21,34	OD:26,16 ~ 26,67	OD: 32,77 ~ 33,40
3	Długość (m)	30,48 (100 stóp)		
4	Certyfikat	UL1660 (NR: E473661)		
5	IP	IP65		
6	Elastyczność	Średni		
7	Ognioodporny	VW-1		
8	Zakres temperatury	-20 ℃ ~ 60 ℃		
9	Kolor	Szary		
10	RoHS	Tak		

39、Zestawienie materiałów

4.1 Widok złącza 180° w rozłożeniu:

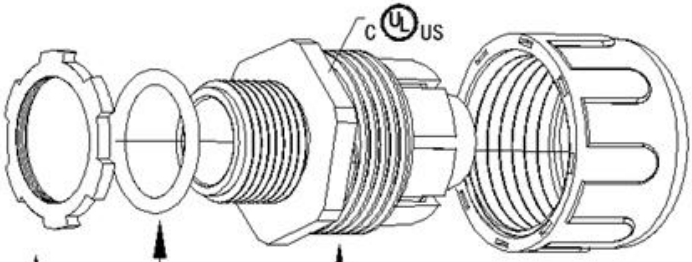

Lock nut,
Material: PA
Color: grey


Nut Material:
carbon steel
Galvanize surface

Seal ring
Material: rubber
Color: black

Centrebody
Material: PA
Color: grey


4.2 Widok złącza 90° w rozłożeniu:

Centrebody
Material: PA
Color: grey

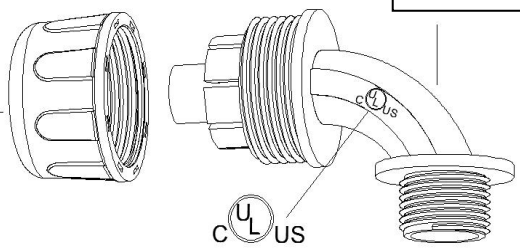


Lock nut,
Material: PA
Color: grey

Seal ring
Material: rubber
Color: black



Nut Material:
carbon steel
Galvanize

4.3 Wodoszczelny, elastyczny profil rurowy z PVC:



40、instrukcja montażu

5.1 Poluzuj nakrętkę
5.2 Włóż przewód w dolną część złącza
5.3 Zablokuj nakrętkę



5.1



5.2



5.3

41、Główna funkcja

Chroń przewody i kable, wodoodporne, odporne na wilgoć, trudnopalne, odporne na zużycie, odporne na ciśnienie, odporne na kurz, odporne na warunki atmosferyczne, miękkie i elastyczne, odporne na olej i tak dalej. Nadaje się do wszystkich rodzajów budynków mieszkalnych i komercyjnych, zakładów przemysłowych i górniczych, okablowania maszyn i innych miejsc.

42、Uwagi:

7.1 Unikaj użytkowania i instalacji poza zakresem temperatur i środowiskiem źródła ognia .

Przed montażem przytnij krawędzie wewnątrz i na zewnątrz kanału kablowego

7.3 Podczas montażu należy spróbować wsunąć przewód w spód złącza i dokręcić nakrętkę.

7.4 Kanały i złącza nadają się wyłącznie do ochrony przewodów i kabli, a nie do innych celów .

Adres : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, szanghaj 200000 CN.

Import do AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Import do USA: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Techniczny Certyfikat wsparcia i e-gwarancji

www.vevor.com/support

VEVOR®

TOUGH TOOLS, HALF PRICE

Technisch Ondersteuning en e-garantiecertificaat

www.vevor.com/support

PVC VLOEISTOFDICHT


Leidinginstructie

We continue to be committed to provide you tools with competitive price.
"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

SPECIFICATIE: PLFNCB- 1/2 , PLFNCB- 3/4 , PLFNCB- 1

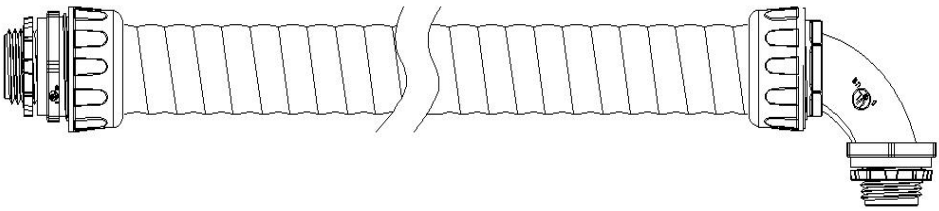

(De afbeelding is alleen ter referentie, raadpleeg het werkelijke object)


NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

43、Tekening

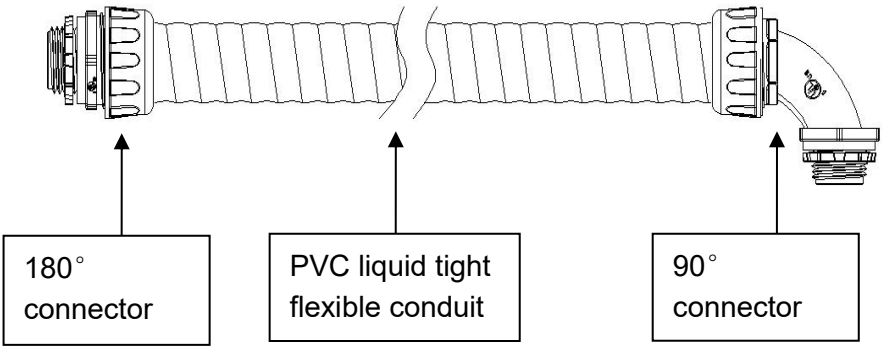

44、Lijst met accessoires


	Accessoire	Aantal	Afbeelding
1	180°-aansluiting	5 STUKS	
2	PVC vloeistofdichte flexibele slang	30,48 M (100 voet)	
3	90°-aansluiting	5 STUKS	

45、Technische specificatie

1	Model	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Duim	1/2”	3/4”	1”
	ID kaart	ID: 15.80 ~ 16.31	ID: 20.83 ~ 21.34	ID: 26.44 ~ 27.08
	O.D	Buitendiameter: 20,83 ~ 21,34	Buitendiameter: 26,16 ~ 26,67	Buitendiameter: 32,77 ~ 33,40
3	Lengte (m)	30,48 (100ft)		
4	Certificaat	UL1660 (NR: E473661)		
5	IK P	IP65		
6	Flexibiliteit	Medium		
7	Brandvertragend	VW-1		
8	Temperatuur bereik	-20℃~60℃		
9	Kleur	Grijs		
10	RoHS	Ja		

46、Materiaallijst

4.1 Explosietekening 180° connector:

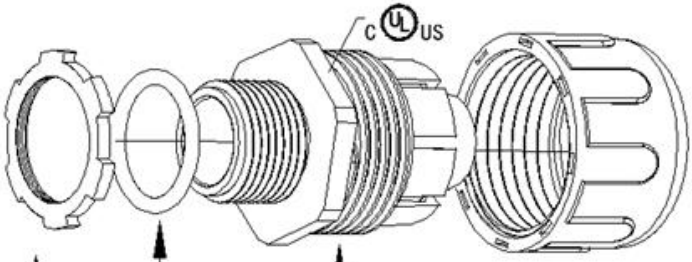


Lock nut,
Material: PA
Color: grey

Nut Material:
carbon steel
Galvanize surface

Seal ring
Material: rubber
Color: black

Centrebody
Material: PA
Color: grey

4.2 Explosietekening 90° connector:

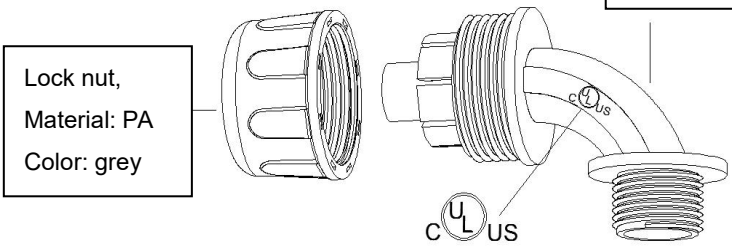


Centrebody
Material: PA
Color: grey

Lock nut,
Material: PA
Color: grey

Seal ring
Material: rubber
Color: black

Nut Material:
carbon steel
Galvanize

4.3 PVC vloeistofdicht flexibel leidingprofiel:



47、montage-instructies

5.1 Maak de moer los
5.2 Steek de kabelbuis in de onderkant van de connector
5.3 Borg de moer



5.1



5.2



5.3

48、Hoofdfunctie

Bescherm draad en kabel, waterdicht, vochtbestendig, vlamvertragend, slijtvast, drukbestendig, stofbestendig, weerbestendig, zacht en flexibel, oliebestendig enzovoort. Geschikt voor alle soorten woon- en commerciële gebouwen, industriële en mijnbouwinstallaties, bedrading van machines en andere plaatsen.

49、Opmerkingen:

7.1 Vermijd gebruik en installatie buiten het temperatuurbereik en de brandhaardomgeving .
7.2 Snij de randen binnen en buiten de leiding af vóór montage

7.3 Probeer bij het monteren de kabelbuis in de onderkant van de connector te steken en de moer vast te zetten.
7.4 Leiding- en connectoren zijn alleen geschikt voor draad- en kabelbescherming, niet voor andere doeleinden .

Adres : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Geïmporteerd naar AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australië
Geïmporteerd naar de VS: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Technisch Ondersteuning en e-garantiecertificaat

www.vevor.com/support

VEVOR®

TOUGH TOOLS, HALF PRICE

Teknisk Support och e-garanticertifikat

www.vevor.com/support

PVC VÄTSKETÄT


C ONDUITINSTRUKTION

We continue to be committed to provide you tools with competitive price.
"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®
TOUGH TOOLS, HALF PRICE

PVC LIQUID TIGHT CONDUIT

SPECIFIKATION: PLFNCB- 1/2 ， PLFNCB- 3/4 ， PLFNCB- 1

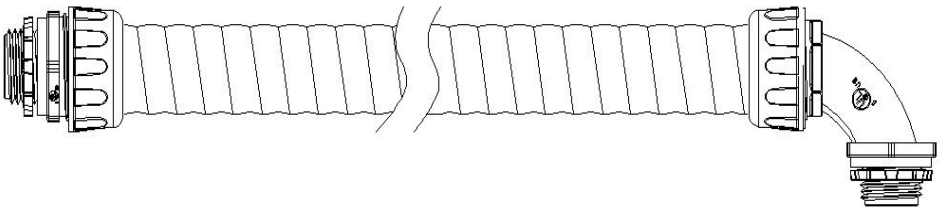

(Bilden är endast för referens, se det faktiska objektet)


NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

50、Teckning

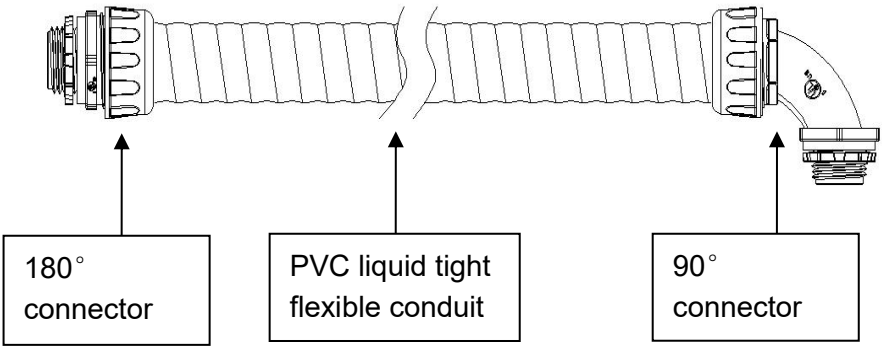

51、Lista över tillbehör


	Tillbehör	Antal	Bild
1	180° kontakt	5 st	
2	PVC Vätsketät flexibel ledning	30,48 M （100 ft）	
3	90° kontakt	5 st	

52、Teknisk specifikation

1	Modell	PLFNCB-1/2	PLFNCB-3/4	PLFNCB-1
2	Tum	1/2"	3/4"	1”
	ID	ID: 15.80~16.31	ID: 20.83~21.34	ID: 26.44~27.08
	OD	OD: 20,83~21,34	OD:26,16~26,67	OD: 32,77~33,40
3	Längd (m)	30,48 （100 fot）		
4	Certifikat	UL1660 (NR: E473661)		
5	IP	IP65		
6	Flexibilitet	Medium		
7	Brandskydds medel	VW-1		
8	Temperaturv ariation	-20℃~60℃		
9	Färg	Grå		
10	RoHS	Ja		

53、Materialförteckning

4.1 180°-kontakt sprängskiss:

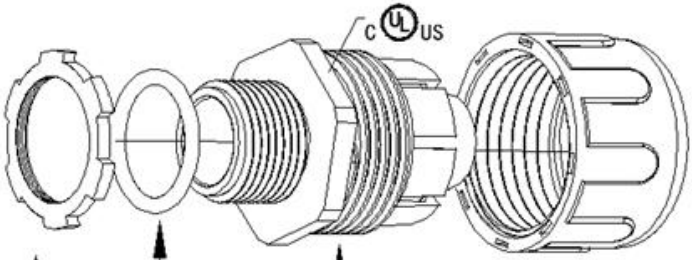

Lock nut,
Material: PA
Color: grey


Nut Material:
carbon steel
Galvanize surface

Seal ring
Material: rubber
Color: black

Centrebody
Material: PA
Color: grey

4.2 90°-kontakt sprängskiss:

Centrebody
Material: PA
Color: grey

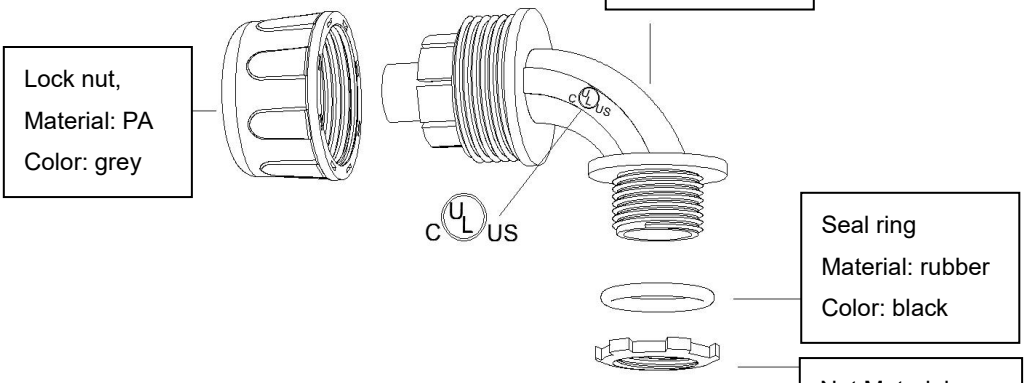


Lock nut,
Material: PA
Color: grey

Seal ring
Material: rubber
Color: black

Nut Material:
carbon steel
Galvanize

4.3 PVC vätsketät flexibel ledningsprofil ：



54、Monteringsanvisning

5.1 Lossa muttern
5.2 Sätt i röret i botten av anslutningen
5.3 Lås muttern



5.1



5.2



5.3

55、Huvudfunktion

Skydda tråd och kabel, vattentät, fuktsäker, flamskyddad, slitstark, tryckbeständig, dammbeständig, väderbeständig, mjuk och flexibel, oljebeständig och så vidare. Lämplig för alla typer av bostäder och kommersiella byggnader, industri- och gruvanläggningar, maskinledningar och andra platser.

56、Anmärkningar:

7.1 Undvik användning och installation utanför temperaturområdet och brandkällans miljö .
7.2 Klipp av kanterna på insidan och utsidan av röret före montering
7.3 Vid montering, försök att föra in röret i botten av anslutningen och låsa muttern.

7.4 Ledningar och anslutningar är endast lämpliga för tråd- och kabelskydd, inte för andra ändamål .

Adress : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Importerad till AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD NSW 2122 Australien
Importerad till USA: Sanven Technology Ltd., Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69, 60329 Frankfurt am Main.

UK	REP

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

VEVOR®

TOUGH TOOLS, HALF PRICE

Teknisk Support och e-garanticertifikat

www.vevor.com/support