VEVOR


Affordable. Reliable. Home Improvement.

PADDLE-BOARD-PUMP
MODEL: HT-708

Technical Support and E-Warranty Certificate
www.vevor.com/support

VEVOR
Affordable. Reliable. Home Improvement.

MODEL: HT-708

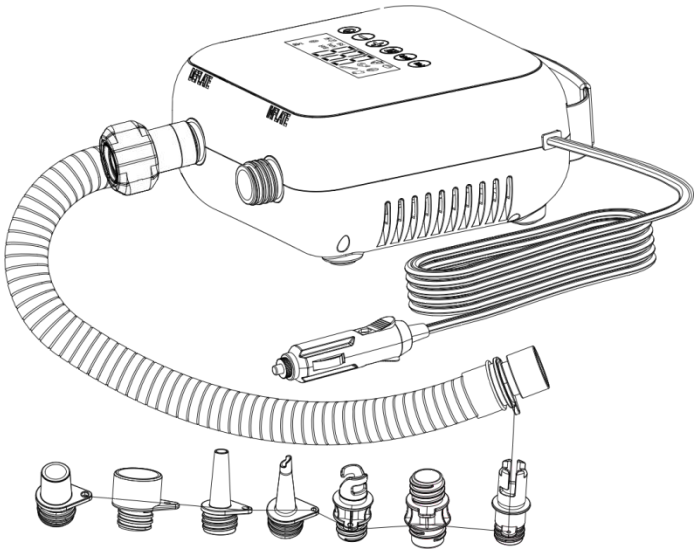

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)This device may not cause harmful interference, and (2)this device must accept any interference received, including interference that may cause undesired operation.
	This product is subject to the provision of European Directive 2012/19/EC. The symbol showing a wheelie bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked as such may not be discarded with normal domestic waste, but must be taken to a collection point for recycling electrical and electronic devices

I. Warnings

*** Warning:** This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.

*** Warning:** Children shall not play with the appliance.

*** Warning:** Cleaning and user maintenance shall not be made by children without supervision.

*** Warning:** Keep the air pump out of reach of children.

*** Warning:** This product shall not be exposed to the rain or immersed in water.

*** Warning:** Before moving, maintaining, repairing or adjusting this product, please first pull out the cigarette lighter plug from the socket.

*** Warning:** Please do not bury the wire in the soil and it shall be place in the safe zone where it won't be damaged by mower or other equipment.

*** Warning:** If the power wire is damaged, the power wire must be changed by the manufacturer or its service agent or the similar authorized personnel, in case of any risk.

*** Warning:** If you are standing in a place with water or your hands are wet, please don't plug or pull the cigarette lighter plug.

*** Warning:** Before inflating, please pay attention to check the maximum bearable pressure of the inflatable product, because the air bag may be damaged upon exceeding the maximum bearable pressure.

*** Warning:** Before using, please check the cigarette lighter socket to make sure that there is no rust or residue inside. The cigarette lighter socket with poor electric conduction may cause overheating of the product or power source, which will damage the product.

*** Warning:** The product can not be used under flammable and explosive environment.

*** Warning:** Please use this equipment at ambient temperature of no more than 40 degrees.

*** Warning:** The pressure line of the product is only suitable for the original wave pipe.

*** Warning:** Do not disassemble the device without authorization. This product does not contain spare parts that can be is assembled/maintained by the user.

*** Warning:** Do not cover or obstruct the product with paper or other objects for fear of affecting heat dissipation and cooling of the product.

*** Warning:** Be sure to check if the wave pipe is broken, and make sure the switch and the pressure screen really work prior to use.

*** Warning:** Keep away from heat source, humidity, dust and direct sunlight.

*** Warning:** The purpose of using this product is limited to the description in the instruction book.

II. Product Introduction

HT-708 is an intelligent DC electric pump with the preset pressure LED screen display with preset pressure value and It can inflate inflatable tents, inflatable beds, canoeing, car, bicycle, ball etc. In addition, it has an

intelligent pressure system. The air pump will automatically stop inflation when pressure reaches the preset pressure value.







This product also can deflate and when the inflatable product is not used, you can use the air pump to empty the air inside for folding and storage.

III. Product Parameters


Pressure	0-40PSI	Input voltage	DC12V

IV. List of Accessories

Please make sure that the following accessories are in the box before using it, if any missing, please contact with the local service agents.

Air pump	Plastic hose	Braided hose
		
Instruction Book	**Sealing ring**	**Shoulder bag**
		

V. Details of Accessories

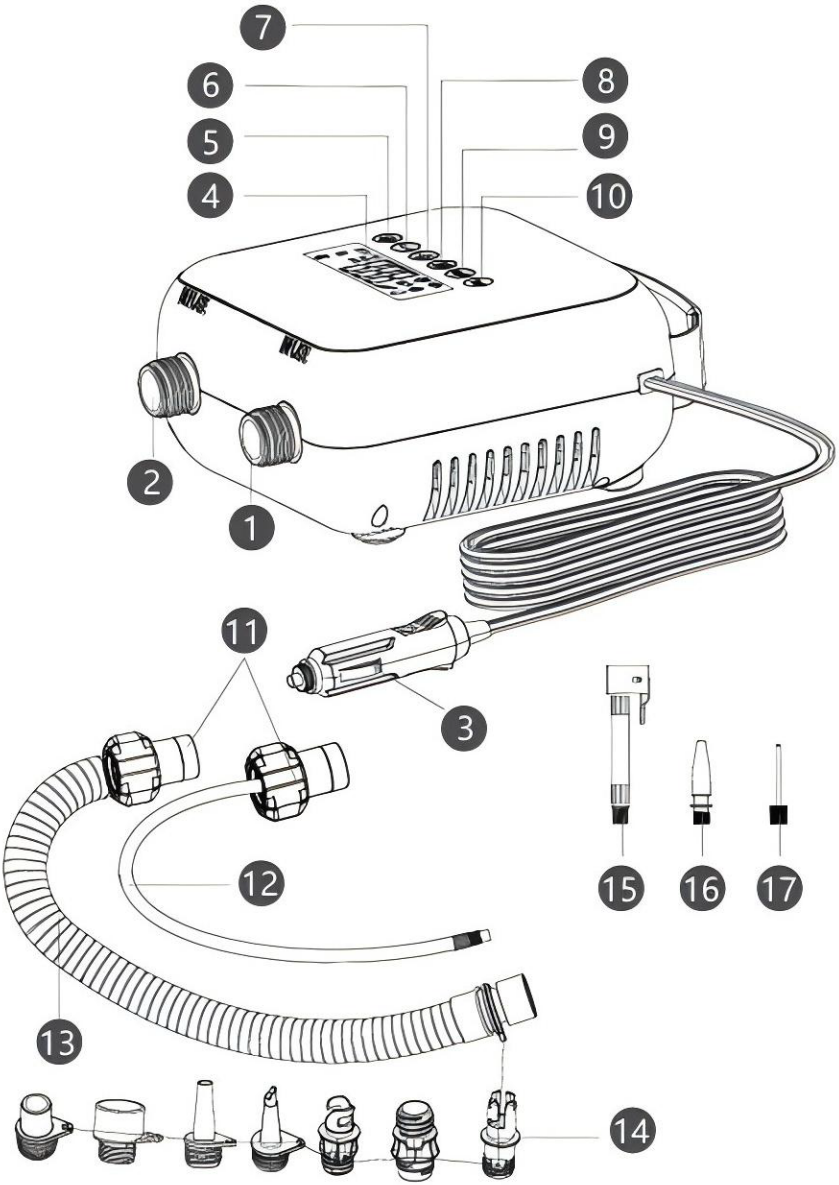
7
6
5
4
8
9
10
2
1
11
3
15
16
17
12
13
14


①	Inflation inlet	⑩	PSI Unit button
②	Deflation outlet	⑪	Flexible conduit adaptor
③	Cigarette lighter plug	⑫	Braided hose
④	LED display	⑬	Plastic hose
⑤	On/off button	⑭	Air nozzle
⑥	Decompressing button	⑮	Hose coupler
⑦	Pressurizing button	⑯	Plastic valve
⑧	Scene switch button	⑰	Ball needle
⑨	BAR Unit button		

VI. Inflation Operation

* Press Scene switch button Ⓜ to switch between the following six inflatable scenes:

- Free mode: adjustable range: 0.5-20PSI
- SUP mode: default 15PSI, adjustable range: 10-20PSI
- Tent mode: default 6PSI, adjustable range: 3-10PSI
- Air bed mode: default 0.5PSI
- Car mode: default 2.5BAR, adjustable range: 1.7-2.75BAR
- Basketball mode: default 8PSI, Adjustable range: 4-16PSI.

INSTRUCTIONS

Product model	Product type	Recommended pressure range
Free 	Other inflatable products	0.5-20PSI
SUP 	SUP surfboard	12-15PSI
Tent 	Air tent	4-7PSI
	Kayak	3-4PSI
	Air kite	6-9PSI
Air bed 	Airbed	0.5PSI
	Air-filled toy	
Car 	Motorcycle and electric motorcycle tires	1.8-2.75BAR
	Small car tires	2.2-2.75BAR
Balls 	Basketball	7-9PSI
	Football	8-16PSI
	Volleybal1	4-5PSI
	Football	12-14PSI


SUP Inflation Operation

* Connect the end with flexible conduit adaptor of the hose with the air pump inflation inlet and twist clockwise to tighten it (Fig 1).


* Connect the other end of the hose with the air nozzle that matches the air bag (Fig 2) and insert the inflation valve of the air bag, turn it clockwise to fix it (Fig 3).

*Plug the cigarette lighter plug into the 12V DC socket (Fig 4), the display will light up.


* Press the scene switch button Ⓜ to select the  inflatable scene.

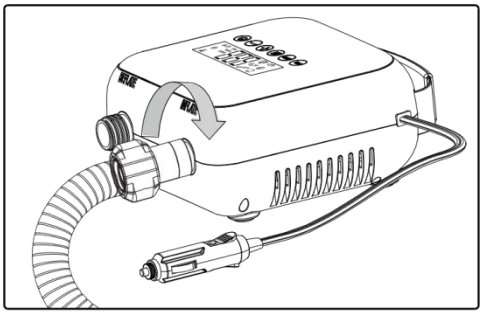


(Fig 1)



(Fig 2)

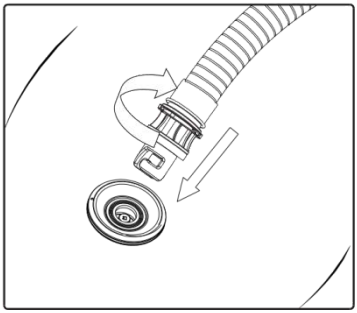

(Fig 3)

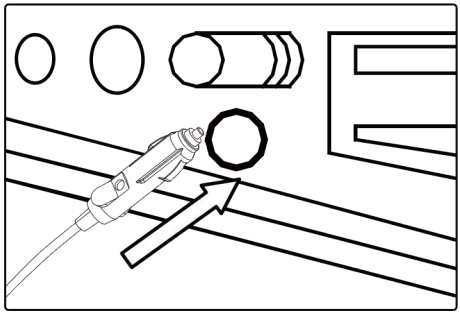


(Fig 4)

* Press the BAR unit button (BAR) or press the PSI unit button (PSI) to select the until you need.


* Press the pressure increase button ⊕ or decompressing button ⊖ to set the desired pressure value. The pressure range is from 0 to 20 PSI (1 PSI = 0.0689 bar = 6.89KPA).

* Upon the completion of the above steps, press the on/off button ⏻ to start inflation (Fig 5).

* During the inflating process, you can press the pressurizing button ⊕ or decompressing button ⊖ to increase or reduce the pressure value, press the BAR unit button (BAR) or press the PSI unit button (PSI) to switch the unit, and press the On/Off button ⏻ to stop.

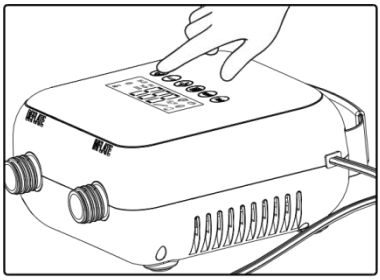

(Fig 5)

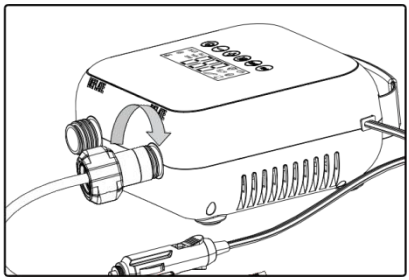

(Fig 6)

Car Inflation Operation

* Connect one end of the fixed head of the braided hose with the air pump inflation port and tighten it clockwise (Fig 6), turn the other end with the plastic air nozzle clockwise (Fig 7) and then insert it into the inflation port of the car tire and fix it (Fig 8).

*Plug the cigarette lighter plug into the 12V DC socket (Fig 4), the display will light up.

* Press the scene switch button (M) to select the  inflatable scene.

INSTRUCTIONS

* Press the BAR unit button (BAR) or press the PSI unit button (PSI) to select the until you need.

* Press the pressure increase button ⊕ or decompressing button ⊖ to set the desired pressure value. The pressure range is from 1.8 to 2.75 BAR (1 PSI = 0.0689 BAR = 6.89KPA).

* Upon the completion of the above steps, press the on/off button o to start inflation.

*During the inflating process, you can press the pressurizing button ⊕ or decompressing button ⊖ to increase or reduce the pressure

value, press the BAR unit button (BAR) or press the PSI unit button (PSI) to switch the unit, and press the On/Off button ⏻ to stop.
*When the pressure reaches the set value, the air pump will stop working automatically.


VII. Deflation Operation
SUP Deflation Operation

*Plug the cigarette lighter plug into the 12V DC socket (Fig 4), the display will light up, press the scene switch button (M) to select the inflatable scene.

* Remove the hose from the inflation inlet; connect the end with flexible conduit adaptor of the hose with the air pump deflation outlet and twist clockwise to tighten it (Fig 9) and the other end shall still be to the airbag.

* Press the on/off button o to start deflation until all the gas is discharged, then the power can be turned off to stop the deflation.

*After the deflation is complete, pull the cigarette lighter plug out of the 12V DC socket; please remove the hose from the air pump and airbag and store it.

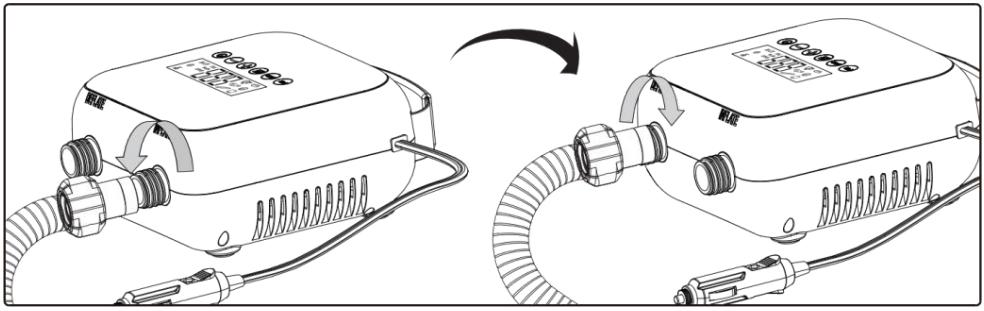

(Fig 9)

VIII. Precautions

* The applied power source must be the 12V DC power source (Fig 4).

* Before inflating, please confirm the air pressure value required by the inflated item to avoid personal injury caused by excessive inflation.

* Do not block the inflation inlet and deflation outlet, and ensure that the inflation inlet and deflation outlet remain smooth at all times.

*Observe the local waste treatment provisions and it is not allowed to throw the air pump away randomly.

* Don't use this product when the hose is damaged, and please change the hose immediately.

*Don't pull out the hose when inflating because the high pressure may hurt the physical body.

* Don't make the air pump work for more than 20 minutes because that motor overheating may cause internal damage and the air pump shall be fully cooled for 30 minutes after continuously working up to 20 minutes.

*  Disposal: Do not dispose of this product as unsorted municipal waste. The waste must be collected separately for special disposal. This product shall not be disposed of with household waste and must be disposed of in an approved location for recycling electrical and electronic products. By collecting and recycling waste, you can help conserve natural resources and ensure that product is treated in an environmentally friendly and healthy way.

* Please don't use this air pump if any part is damaged and please contact with the professional personnel to repair it.

* In order to prevent risk, the inflation inlet shall not be forwarded to face or body.

* Please don't leave while inflating.

* Please start the car when using the product, in case of unnecessary damage.

IX. Fault Handling

Malfunction	Cause	Solution
The air pump cannot be started	1. The power source is not plugged properly. 2. The fuse in Cigarette lighter	1. Make sure that the power wire is plugged in the 12V DC socket. 2. Change the fuse. 3. Cool the motor and restart it.

normally.	plug is burnt out. 3. Overheating or overload causes motor stop.	4. If the problem cannot be solved, please contact local agents or the similar authorized personnel.
Slow or abnormal inflation.	1. Check whether the hose is blocked or cracked. 2. The joint between the hose and air pump or air bag is not installed properly.	1. Change the hose or make it unblocked, and check whether the hose is cracked. 2. Reinstall the hose. 3. If the problem cannot be solved, please contact with the manufacturer or its service agent or the similar authorized personnel.
Hot	Temperature alarm.	Heat dissipation is required.
E3	Shutdown protection without increasing air pressure.	Check for air leaks.
U-L	Low power alarm of power supply (voltage lower than 10.5 V).	1. Power supply voltage is low. 2. Power supply is insufficient. And line has limited current. 3. Power adapter overcurrent protection shall be used, requiring special adapter (120 W without current limit).
U-H	High input voltage alarm (over 17 V).	Standard power supply shall be selected.

LO/HI E6	Motor overcurrent protection.	Check motor for foreign matter stuck or restart air pump, If the problem cannot be solved, please contact local agents or the similar authorized personnel.
E8	Failure of air pressure sensor	Please contact with the manufacturer or its service agent or the similar authorized personnel.
Air pressure does not return to zero	Remove the connecting trachea.	Press and hold the PSI button for more than 3 seconds to return to zero.

XII. Maintenance and Storage

*****After using, or if you want to move, maintain or adjust the product, please first pull out the DC plug from the socket.

*****When it is idle, it shall be properly stored after being fully cooled. ***** It shall not be exposed to the rain or immersed in water.

***** Please store it in the dry and ventilated place.

XIII. Suggestions

* The warranty period of this product is one year, and it is suggested to use the original accessories. For any fault not caused by using the original accessories, it shall be out of the warranty scope.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



Technical Support and E-Warranty Certificate
www.vevor.com/support


Machine Translated by Google

VEVOR

Affordable. Reliable. Home Improvement.

Machine Translated by Google

VEVOR
Affordable. Reliable. Home Improvement.

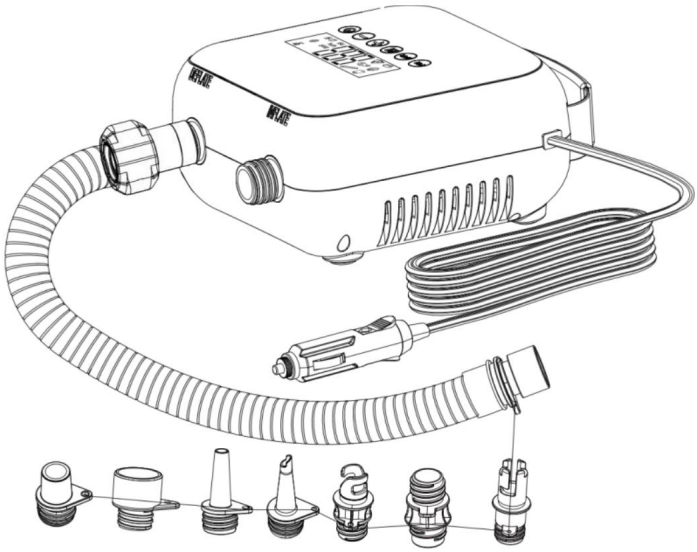

Machine Translated by Google

Machine Translated by Google

Machine Translated by Google

Système de pression intelligent. La pompe à air arrête automatiquement le gonflage.
lorsque la pression atteint la valeur de pression prédéfinie.







Ce produit peut également se dégonfler et lorsque le produit gonflable n'est pas utilisé,
vous pouvez utiliser la pompe à air pour vider l'air à l'intérieur pour le pliage et le stockage.

III. Paramètres du produit

Pression	0-40 PSI	Tension d'entrée	12 V CC


IV. Liste des accessoires

Veuillez vous assurer que les accessoires suivants sont dans la boîte avant de l'utiliser. S'il en manque, veuillez contacter les agents de service locaux.

Pompe à air	tuyau en plastique	Tuyau tressé
		
Manuel d'instructions	**Bague d'étanchéité**	**Sac à bandoulière**
		

V. Détails des accessoires

Machine Translated by Google

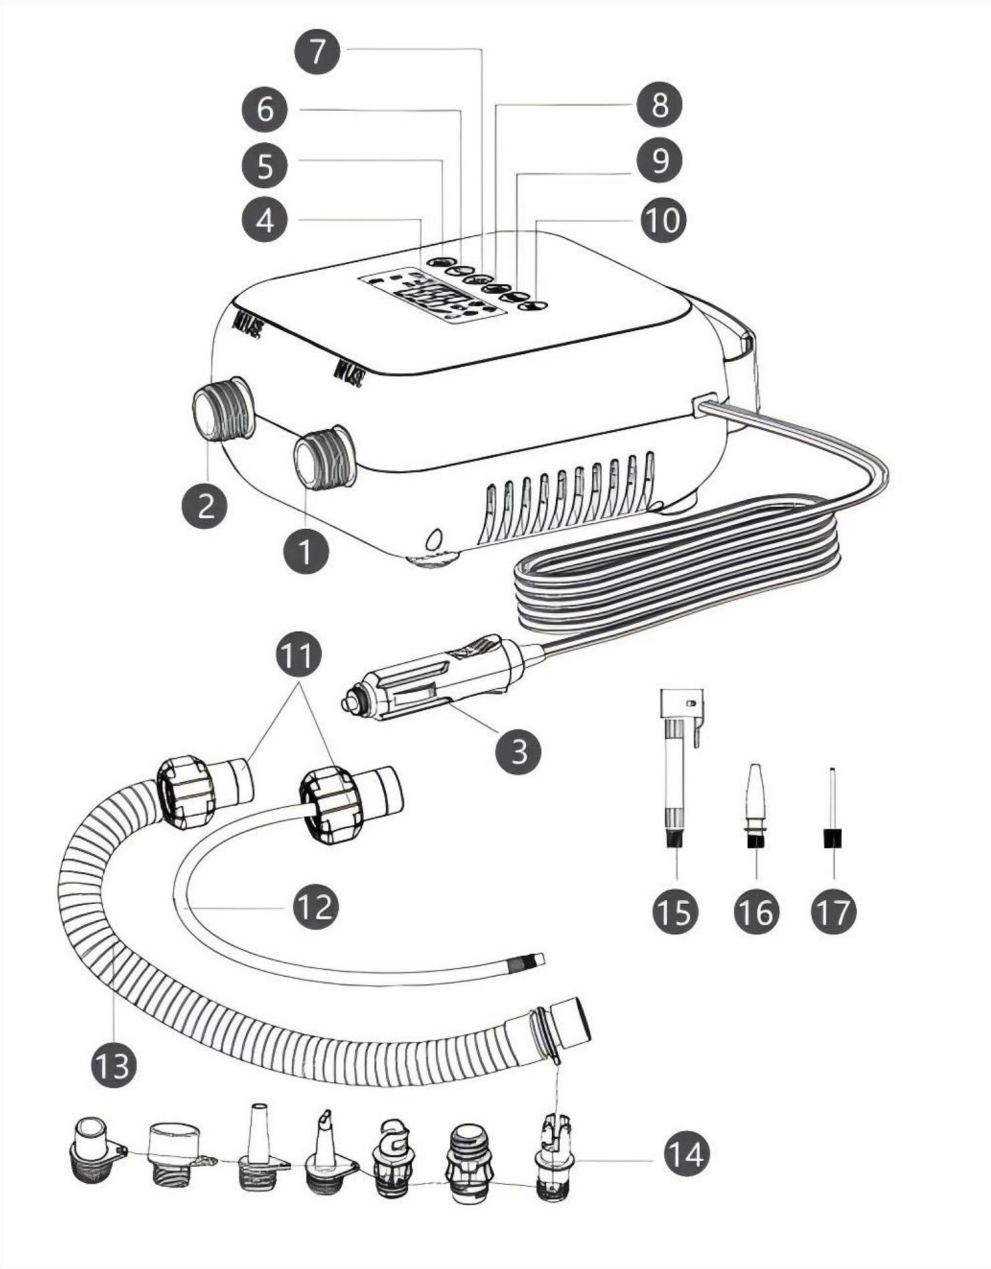

Machine Translated by Google


1	Entrée d'inflation	10	Bouton d'unité PSI
2	Sortie de déflation	11	Adaptateur de conduit flexible
3	Prise allume-cigare	12	Tuyau tressé
4	Affichage LED	13	tuyau en plastique
5	Bouton marche/arrêt	14	buse d'air
6	Bouton de décompression	15	Raccord de tuyau
7	Bouton de pressurisation	16	Valve en plastique
8	Bouton de changement de scène	17	Aiguille à bille
9	Bouton Unité BAR		

VI. Opération d'inflation


* Appuyez sur le bouton de commutation de scène (M) pour basculer entre les six suivants pour obtenir des scènes gonflables :


- Mode libre : plage réglable : 0,5-20 PSI
- Mode SUP : par défaut 15 PSI, plage réglable : 10-20 PSI
- Mode tente : 6 PSI par défaut, plage réglable : 3-10 PSI
- Mode matelas pneumatique : par défaut 0,5 PSI
- Mode voiture : par défaut 2,5 bar, plage réglable : 1,7-2,75 bar
- Mode basket-ball : par défaut 8 PSI, plage réglable : 4-16 PSI.


Machine Translated by Google


		
		
		
		
		
		

Machine Translated by Google

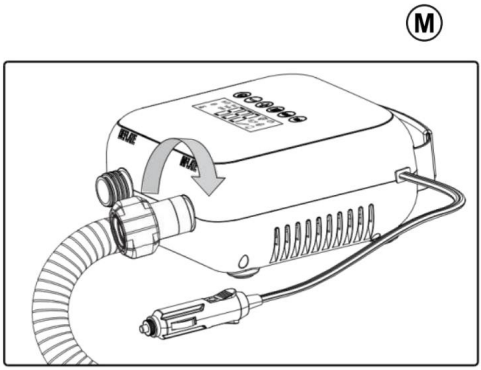



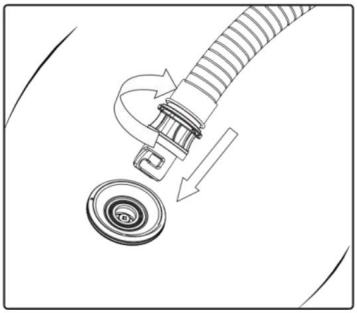


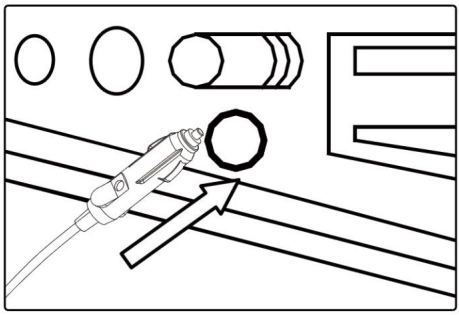


BAR PSI

Machine Translated by Google

BAR PSI

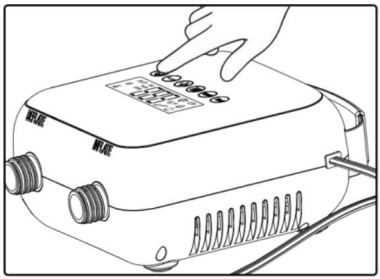

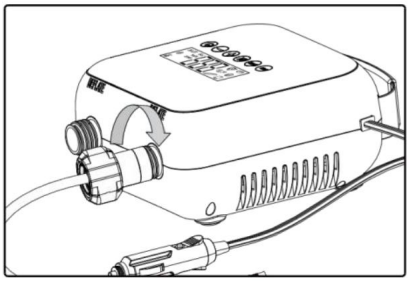


M

BAR PSI

Machine Translated by Google

BAR PSI

M

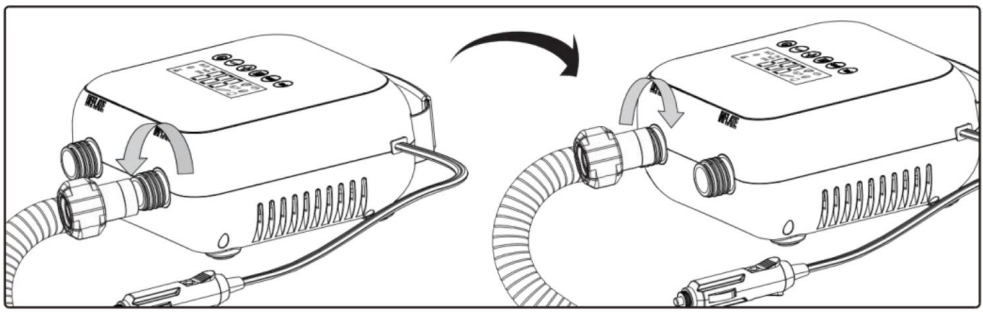


Machine Translated by Google



Machine Translated by Google

Machine Translated by Google

Machine Translated by Google



Machine Translated by Google




Machine Translated by Google

VEVOR

Affordable. Reliable. Home Improvement.

Machine Translated by Google

VEVOR
Affordable. Reliable. Home Improvement.

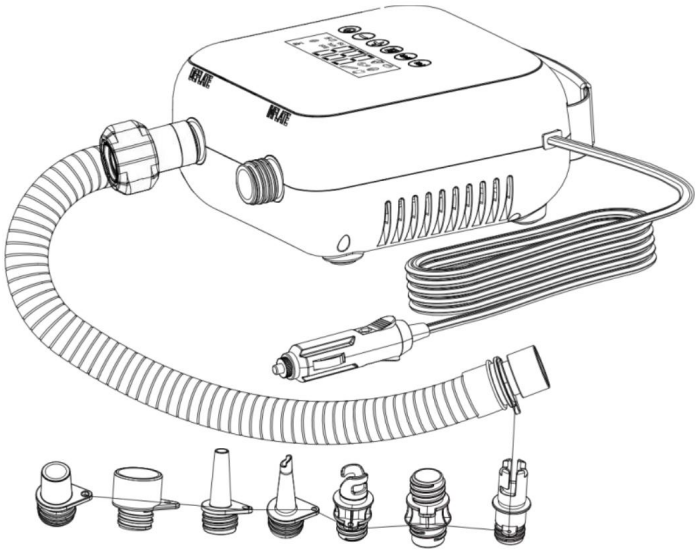

Machine Translated by Google

Machine Translated by Google

Machine Translated by Google

intelligentes Drucksystem. Die Luftpumpe stoppt das Aufpumpen automatisch wenn der Druck den voreingestellten Druckwert erreicht.

Dieses Produkt kann auch Luft ablassen und wenn das aufblasbare Produkt nicht verwendet wird,







Sie können die Luft im Inneren mit der Luftpumpe ablassen, bevor Sie den Rucksack zusammenfalten und verstauen.

III. Produktparameter

Druck	0–40 PSI	Eingangsspannung	DC12V


IV. Zubehörliste

Bitte stellen Sie vor der Verwendung sicher, dass sich das folgende Zubehör in der Verpackung befindet. Falls etwas fehlt, wenden Sie sich bitte an den örtlichen Kundendienst.

Luftpumpe	Kunststoffschlauch	Geflochtener Schlauch
		
Bedienungsanleitung	**Dichtungsring**	**Umhängetasche**
		

V. Zubehördetails

Machine Translated by Google

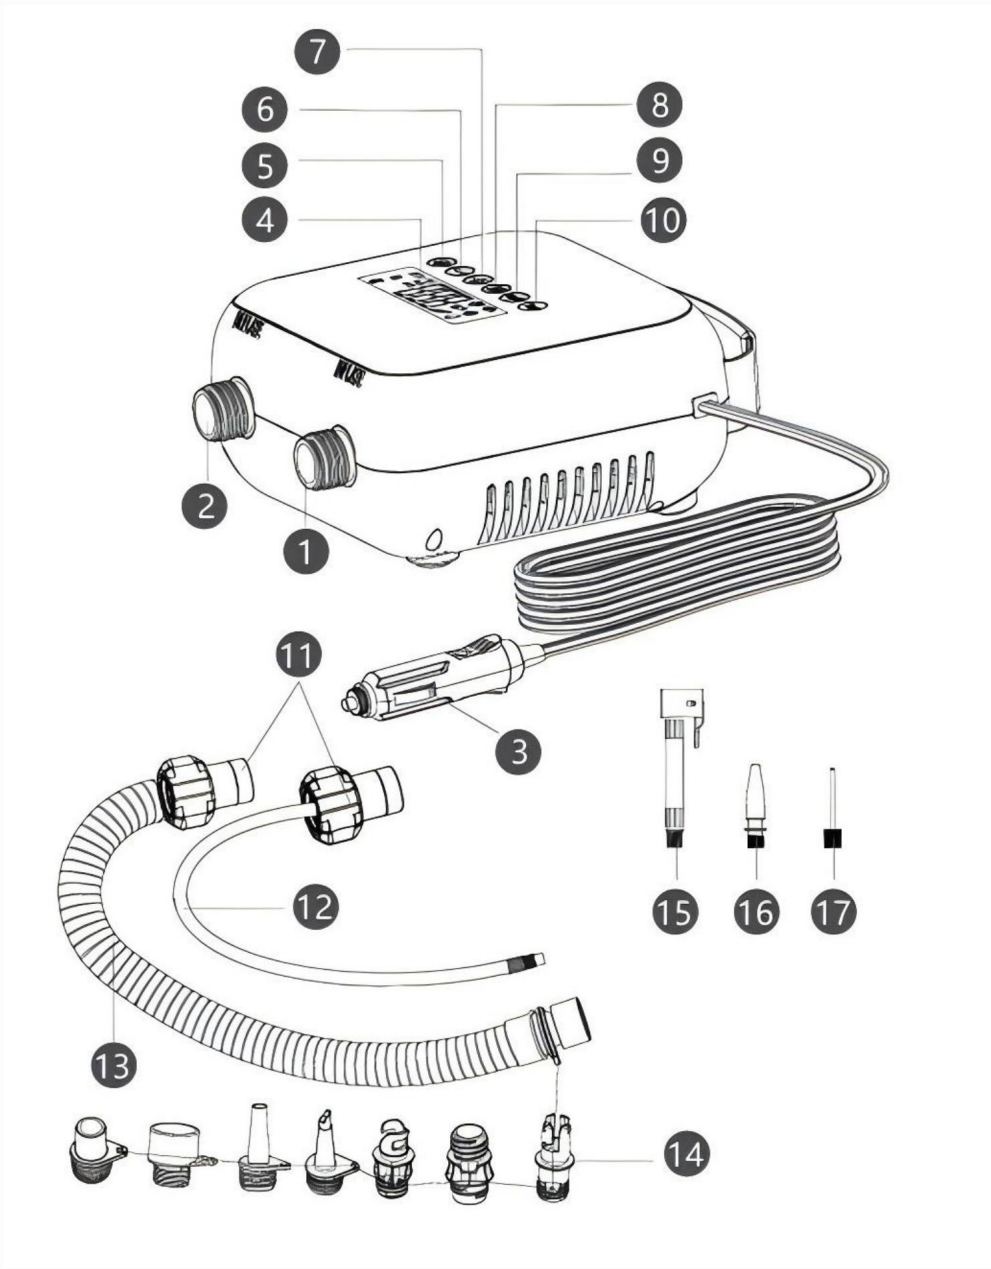

Machine Translated by Google


1	Inflationseinlass	10	Schaltfläche „PSI-Einheit“
2	Entleerungsauslass	11	Flexibler Leitungsadapter
3	Zigarettenanzünderstecker	12	Geflochtener Schlauch
4	LED-Anzeige	13	Kunststoffschlauch
5	Ein-/Aus-Taste	14	Luftdüse
6	Dekomprimierungstaste	15	Schlauchkupplung
7	Druckknopf	16	Kunststoffventil
8	Szenenwechseltaste	17	Ballnadel
9	BAR-Einheitentaste		

VI. Inflationsvorgang


* Drücken Sie die Schaltfläche (M) um zwischen den folgenden sechs Szenenwechsel für aufblasbare Szenen:


- Freier Modus: einstellbarer Bereich: 0,5–20 PSI
- SUP-Modus: Standard 15 PSI, einstellbarer Bereich: 10–20 PSI
- Zeltmodus: Standard 6PSI, einstellbarer Bereich: 3-10PSI
- Luftbettmodus: Standard 0,5 PSI
- Automodus: Standard 2,5 BAR, einstellbarer Bereich: 1,7–2,75 BAR
- Basketballmodus: Standardmäßig 8 PSI, Einstellbereich: 4–16 PSI.


Machine Translated by Google


		
		
		
		
		
		

Machine Translated by Google

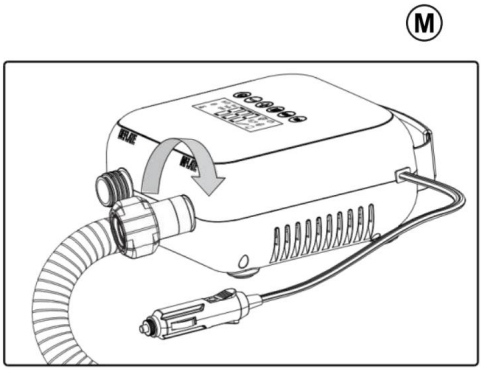



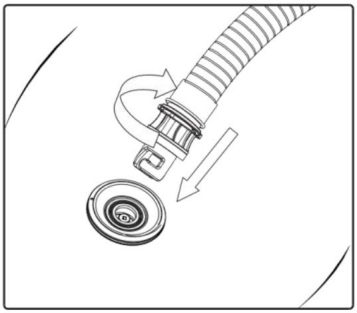


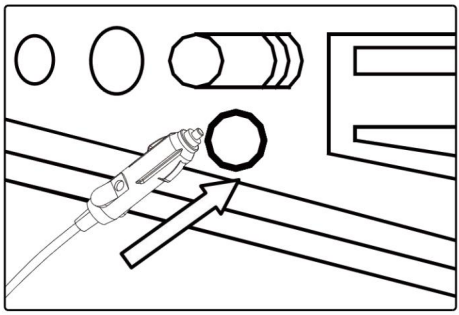


BAR PSI

Machine Translated by Google

BAR PSI

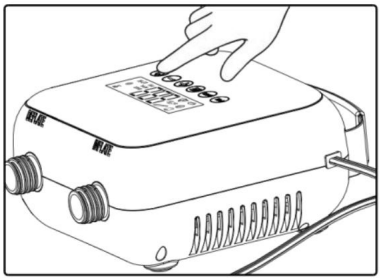

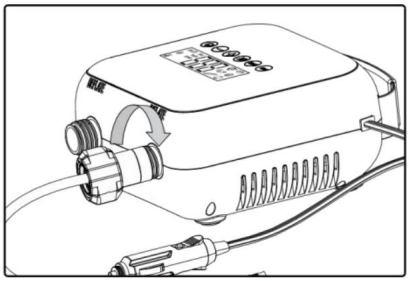


M

BAR PSI

Machine Translated by Google

BAR PSI

M

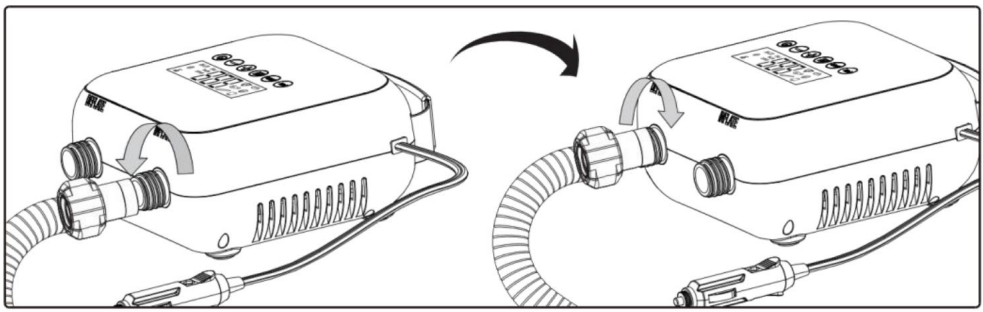


Machine Translated by Google



Machine Translated by Google

Machine Translated by Google

Machine Translated by Google



Machine Translated by Google




Machine Translated by Google

VEVOR

Affordable. Reliable. Home Improvement.

Machine Translated by Google

VEVOR
Affordable. Reliable. Home Improvement.

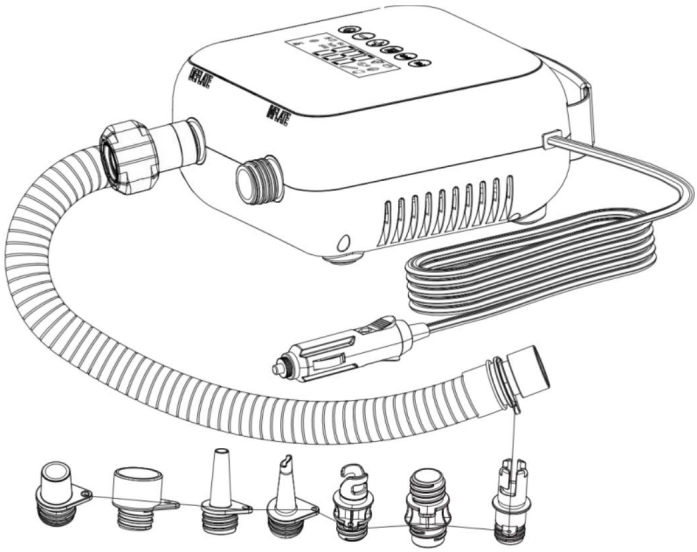

Machine Translated by Google

Machine Translated by Google

Machine Translated by Google

sistema di pressione intelligente. La pompa dell'aria interromperà automaticamente il gonfiaggio quando la pressione raggiunge il valore di pressione preimpostato.







Questo prodotto può anche sgonfiarsi e quando il prodotto gonfiabile non viene utilizzato, è possibile utilizzare la pompa dell'aria per svuotare l'interno e procedere alla piegatura e allo stoccaggio.

III. Parametri del prodotto

Pressione	0-40 PSI	Tensione di ingresso	DC12V


IV. Elenco degli accessori

Prima di utilizzare il prodotto, assicurarsi che nella confezione siano presenti i seguenti accessori; in caso di mancanza di alcuni, contattare il servizio clienti locale.

Pompa ad aria	Tubo di plastica	Tubo flessibile intrecciato
		
Libretto di istruzioni	**Anello di tenuta**	**Borsa a tracolla**
		

V. Dettagli degli accessori

Machine Translated by Google

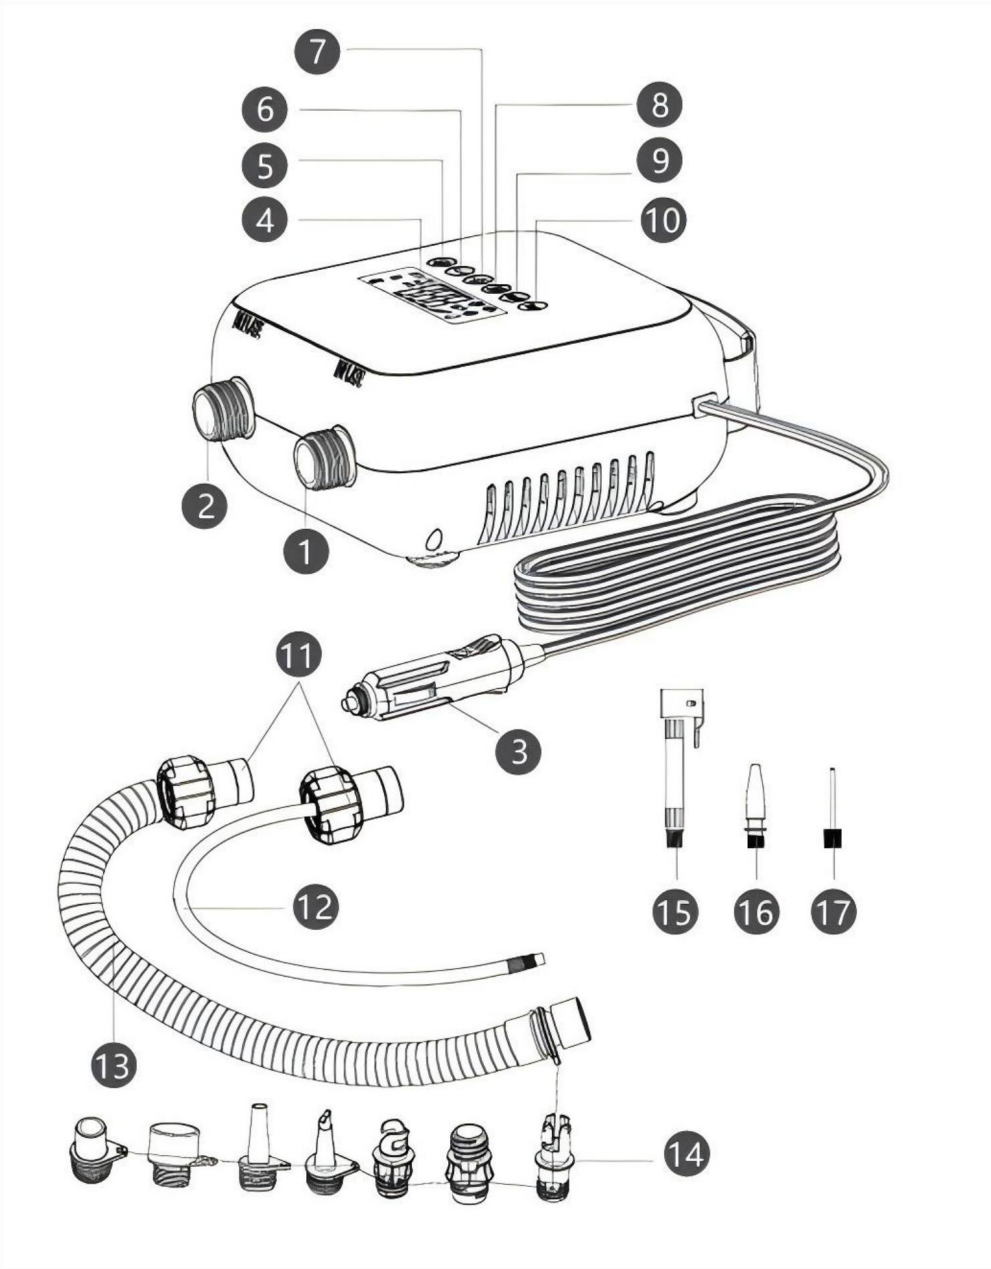

Machine Translated by Google


1	Ingresso di gonfiaggio	10	Pulsante unità PSI
2	Uscita di deflazione	11	Adattatore per condotto flessibile
3	Presa accendisigari	12	Tubo flessibile intrecciato
4	Schermo LED	13	Tubo di plastica
5	Pulsante di accensione/spegnimento	14	Ugello aria
6	Pulsante di decompressione	15	Giunto per tubo flessibile
7	Pulsante di pressurizzazione	16	Valvola di plastica
8	Pulsante di cambio scena	17	Ago a sfera
9	Pulsante Unità BAR		

VI. Operazione di inflazione


* Premere il pulsante di commutazione (M) per passare tra i sei seguenti scena per le scene gonfiabili:


- Modalità libera: intervallo regolabile: 0,5-20 PSI
- Modalità SUP: predefinita 15 PSI, intervallo regolabile: 10-20 PSI
- Modalità tenda: predefinita 6 PSI, intervallo regolabile: 3-10 PSI
- Modalità letto ad aria: predefinito 0,5 PSI
- Modalità auto: predefinita 2,5 BAR, intervallo regolabile: 1,7-2,75 BAR
- Modalità basket: predefinito 8 PSI, intervallo regolabile: 4-16 PSI.


Machine Translated by Google


		
		
		
		
		
		

Machine Translated by Google

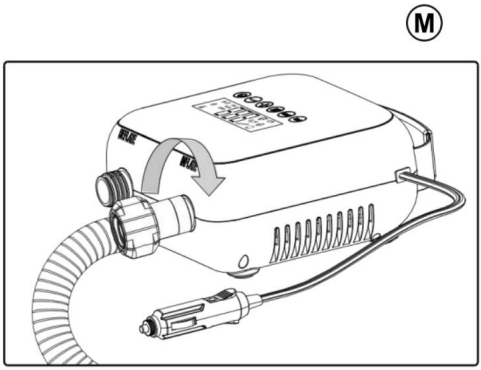



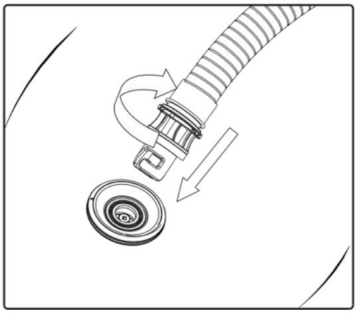


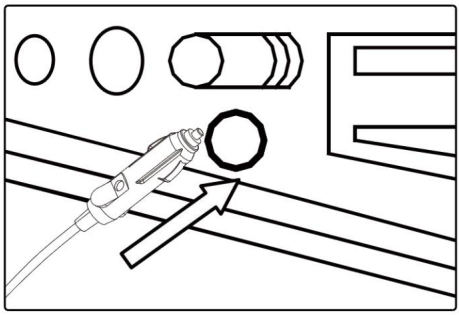


BAR PSI

Machine Translated by Google

BAR PSI

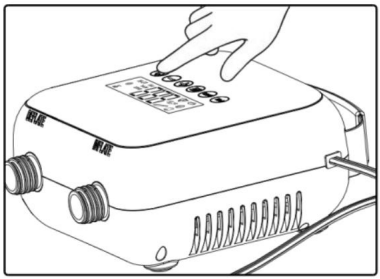

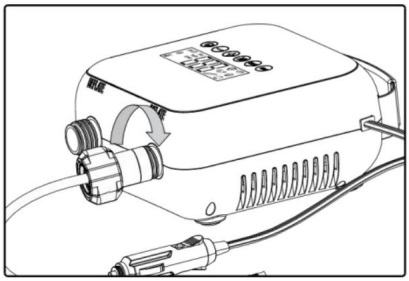


M

BAR PSI

Machine Translated by Google

BAR PSI

M

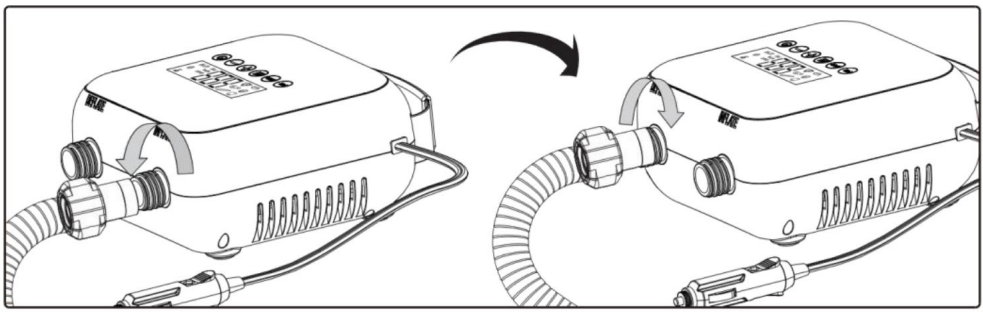


Machine Translated by Google



Machine Translated by Google

Machine Translated by Google

Machine Translated by Google



Machine Translated by Google




Machine Translated by Google

VEVOR

Affordable. Reliable. Home Improvement.

Machine Translated by Google

VEVOR
Affordable. Reliable. Home Improvement.

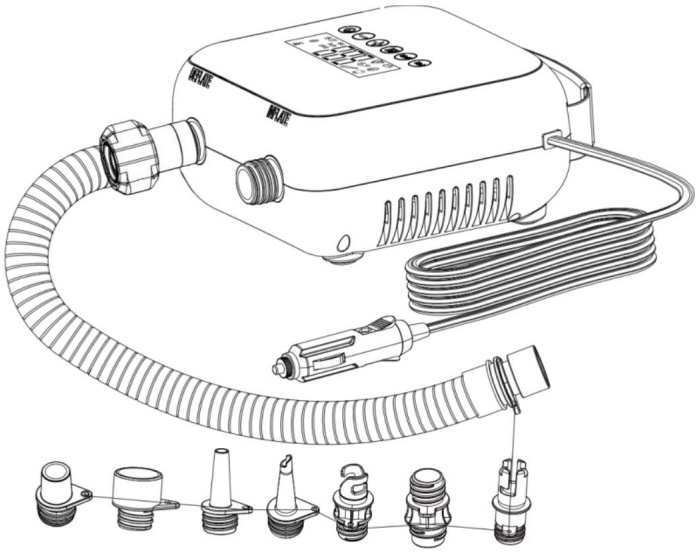

Machine Translated by Google

Machine Translated by Google

Machine Translated by Google

Sistema de presión inteligente. La bomba de aire detendrá automáticamente el inflado.
cuando la presión alcanza el valor de presión preestablecido.







Este producto también se puede desinflar y cuando no se utiliza el producto inflable,
Puedes usar la bomba de aire para vaciar el aire del interior para plegarlo y guardarlo.

III. Parámetros del producto

Presión	0-40 PSI	Voltaje de entrada	12 V CC


IV. Lista de accesorios

Asegúrese de que los siguientes accesorios estén en la caja antes de usarlo. Si falta alguno, comuníquese con los agentes de servicio locales.

Bomba de aire	Manguera de plástico	Manguera trenzada
		
Manual de instrucciones	**Anillo de sellado**	**Bolso de hombro**
		

V. Detalles de los accesorios

Machine Translated by Google

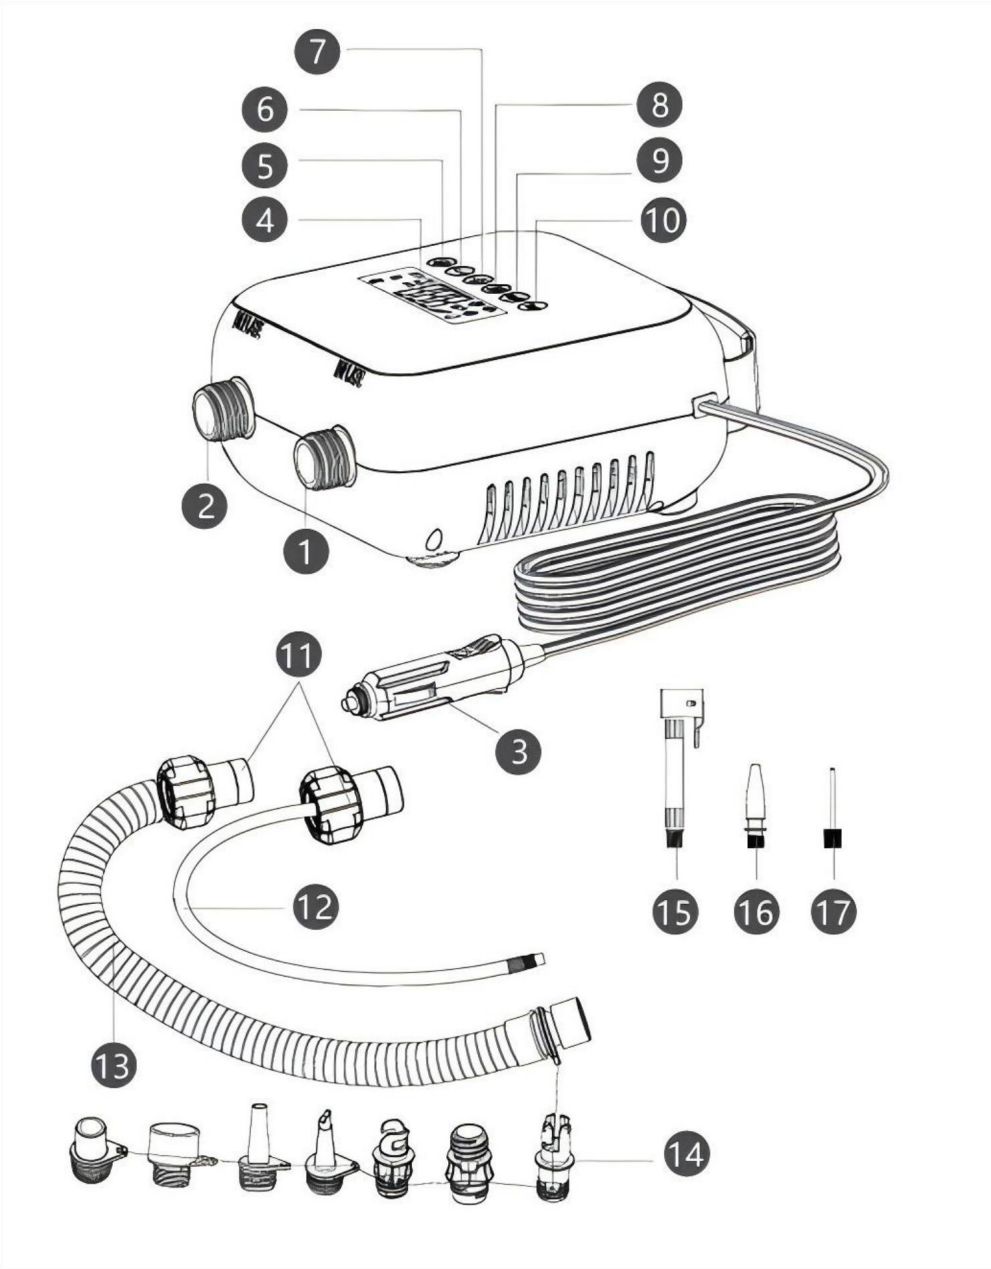

Machine Translated by Google


1	Entrada de inflado	10	Botón de unidad PSI
2	Salida de deflación	11	Adaptador de conducto flexible
3	Enchufe del encendedor de cigarrillos	12	Manguera trenzada
4	Pantalla LED	13	Manguera de plástico
5	Botón de encendido/apagado	14	Boquilla de aire
6	Botón de descompresión	15	Acoplador de manguera
7	Botón de presurización	16	válvula de plástico
8	Botón de cambio de escena	17	Aguja de bola
9	Botón de unidad BAR		

VI. Operación de Inflación


* Presione el botón de cambio de escena (M) para cambiar entre los siguientes seis para escenas inflables:


- Modo libre: rango ajustable: 0,5-20 PSI
- Modo SUP: predeterminado 15 PSI, rango ajustable: 10-20 PSI
- Modo tienda: predeterminado 6 PSI, rango ajustable: 3-10 PSI
- Modo colchón de aire: predeterminado 0,5 PSI
- Modo automóvil: predeterminado 2,5 BAR, rango ajustable: 1,7-2,75 BAR
- Modo baloncesto: predeterminado 8 PSI, rango ajustable: 4-16 PSI.


Machine Translated by Google


		
		
		
		
		
		

Machine Translated by Google

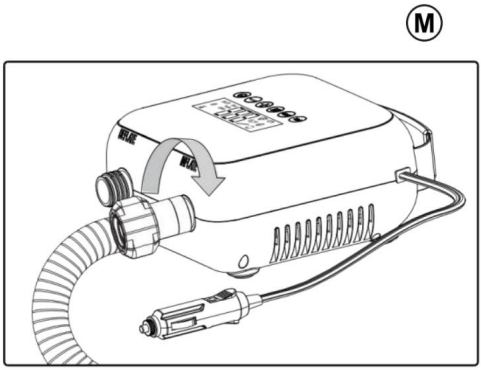



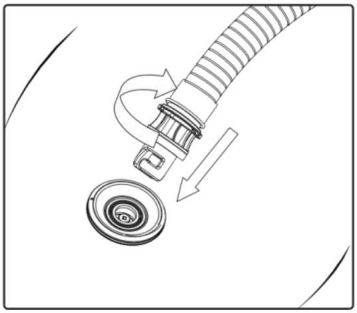


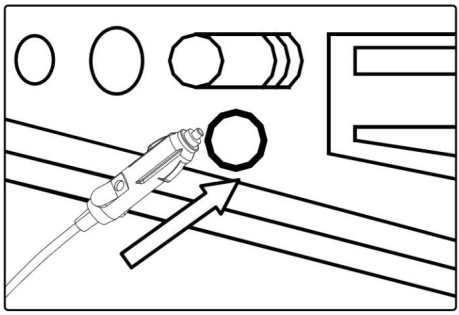


BAR PSI

Machine Translated by Google

BAR PSI

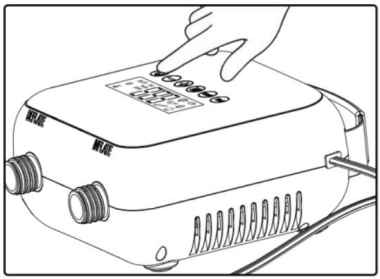

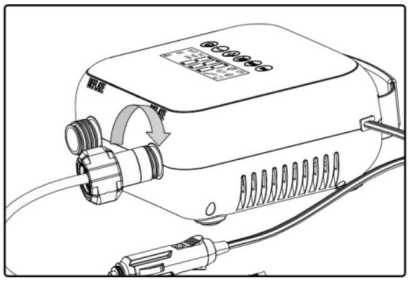


M

BAR PSI

Machine Translated by Google

BAR PSI

M

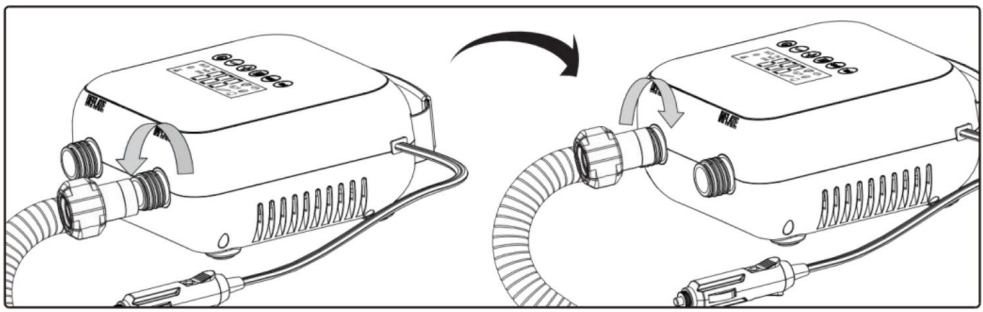


Machine Translated by Google



Machine Translated by Google

Machine Translated by Google

Machine Translated by Google



Machine Translated by Google




Machine Translated by Google

VEVOR

Affordable. Reliable. Home Improvement.

Machine Translated by Google

VEVOR
Affordable. Reliable. Home Improvement.

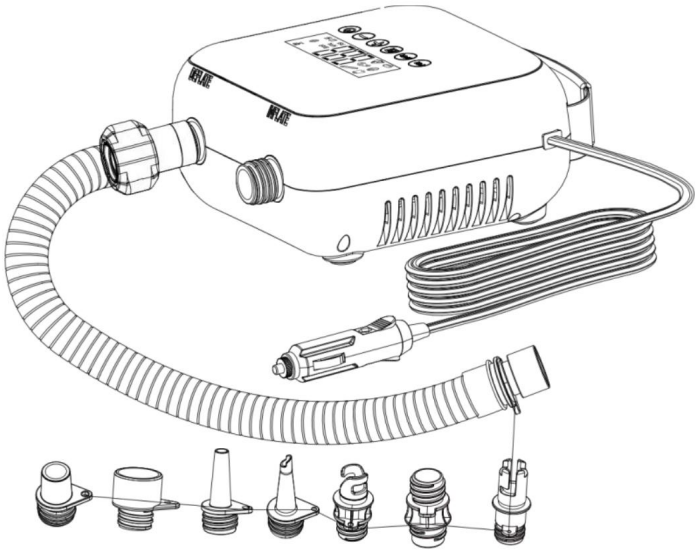

Machine Translated by Google

Machine Translated by Google

Machine Translated by Google

inteligentny system ciśnieniowy. Pompa powietrza automatycznie zatrzyma pompowanie gdy ciśnienie osiągnie zadaną wartość.







Produkt ten można również opróżnić, jeśli nie jest nadmuchiwany,
Za pomocą pompki można opróżnić wnętrze z powietrza, co ułatwi składanie i przechowywanie.

III. Parametry produktu

Ciśnienie	0-40PSI	Napięcie wejściowe	Prąd stały 12 V


IV. Lista akcesoriów

Przed użyciem należy sprawdzić, czy w pudełku znajdują się następujące akcesoria. W razie braku któregokolwiek z nich prosimy o kontakt z lokalnym przedstawicielem serwisu.

Pompa powietrza	Wąż plastikowy	Wąż pleciony
		
Instrukcja obsługi	**Pierścień uszczelniający**	**Torba na ramię**
		

V. Szczegóły dotyczące akcesoriów

Machine Translated by Google

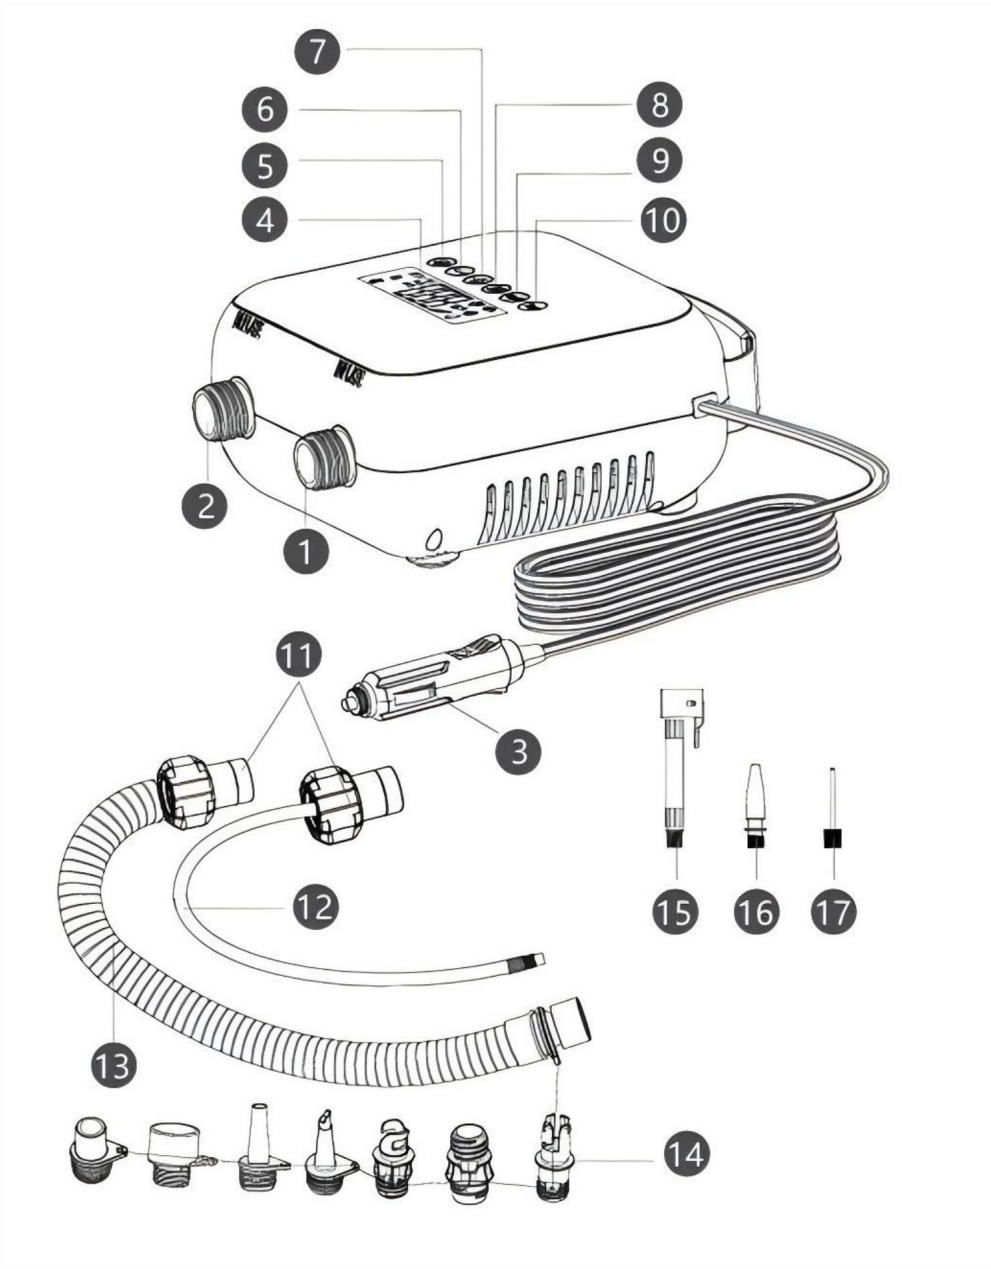

Machine Translated by Google

①	Wlot do pompowania	⑩	Przycisk jednostki PSI
②	Wylot deflacji	⑪	Elastyczny adapter do rur
③	Wtyczka zapalniczki samochodowej	⑫	Wąż pleciony
④	Wyświetlacz LED	⑬	Wąż plastikowy
⑤	Przycisk włączania/wyłączania	⑭	Dysza powietrza
⑥	Przycisk dekompresji	⑮	Złącze węża
⑦	Przycisk dociskowy	⑯	Zawór plastikowy
⑧	Przycisk przełączania scen	⑰	Igła do piłek
⑨	Przycisk jednostki BAR		

VI. Operacja inflacyjna

* Naciśnij przycisk przełączania scen Ⓜ aby przełączać się między następującymi sześcioma nadmuchiwanych:

Tryb swobodny: zakres regulacji: 0,5-20 PSI

Tryb SUP: domyślnie 15 PSI, zakres regulacji: 10-20 PSI


Tryb namiotu: domyślnie 6 PSI, zakres regulacji: 3-10 PSI

Tryb łóżka powietrznego: domyślnie 0,5 PSI


Tryb samochodowy: domyślnie 2,5 BAR, zakres regulacji: 1,7-2,75 BAR


Tryb koszykówki: domyślny 8 PSI, zakres regulacji: 4-16 PSI.


Machine Translated by Google


		
		
		
		
		
		

Machine Translated by Google

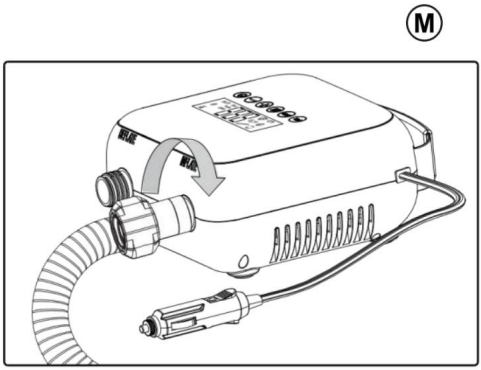



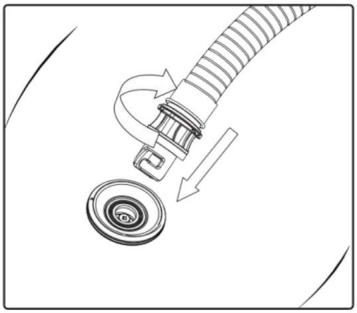


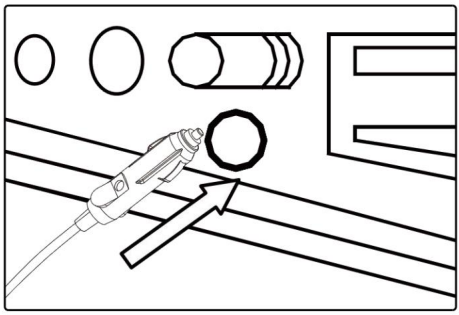


BAR PSI

Machine Translated by Google

BAR PSI

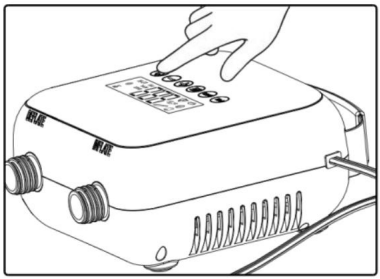

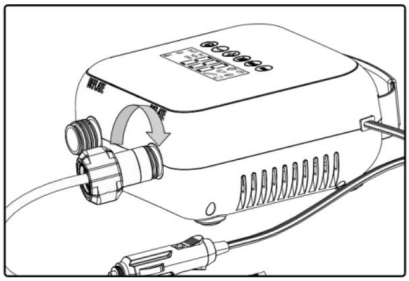


M

BAR PSI

Machine Translated by Google

BAR PSI

M

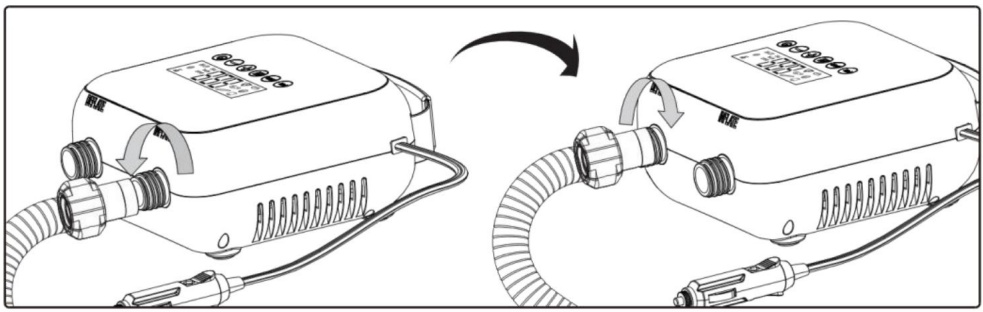


Machine Translated by Google



Machine Translated by Google

Machine Translated by Google

Machine Translated by Google



Machine Translated by Google




Machine Translated by Google

VEVOR

Affordable. Reliable. Home Improvement.

Machine Translated by Google

VEVOR
Affordable. Reliable. Home Improvement.

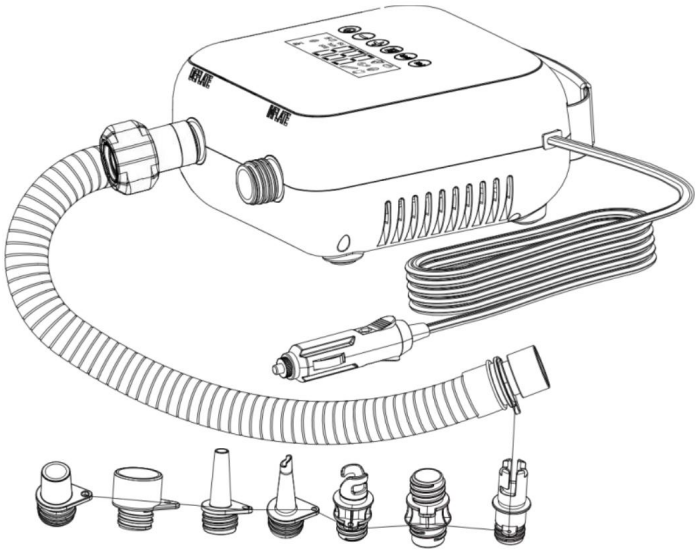

Machine Translated by Google

Machine Translated by Google

Machine Translated by Google

intelligent trycksystem. Luftpumpen stoppar automatiskt uppblåsningen när trycket når det förinställda tryckvärdet.







Denna produkt kan också tömmas och när den uppblåsbara produkten inte används, du kan använda luftpumpen för att tömma luften inuti för hopfällning och förvaring.

III. Produktparametrar

Tryck	0-40PSI	Ingångsspänning	DC12V


IV. Lista över tillbehör

Se till att följande tillbehör finns i kartongen innan du använder dem, om några saknas, kontakta den lokala servicerepresentanten.

Luftpump	Plastslang	Flätad slang
		
Instruktionsbok	**Tätningsring**	**Axelväska**
		

V. Detaljer om tillbehör

Machine Translated by Google

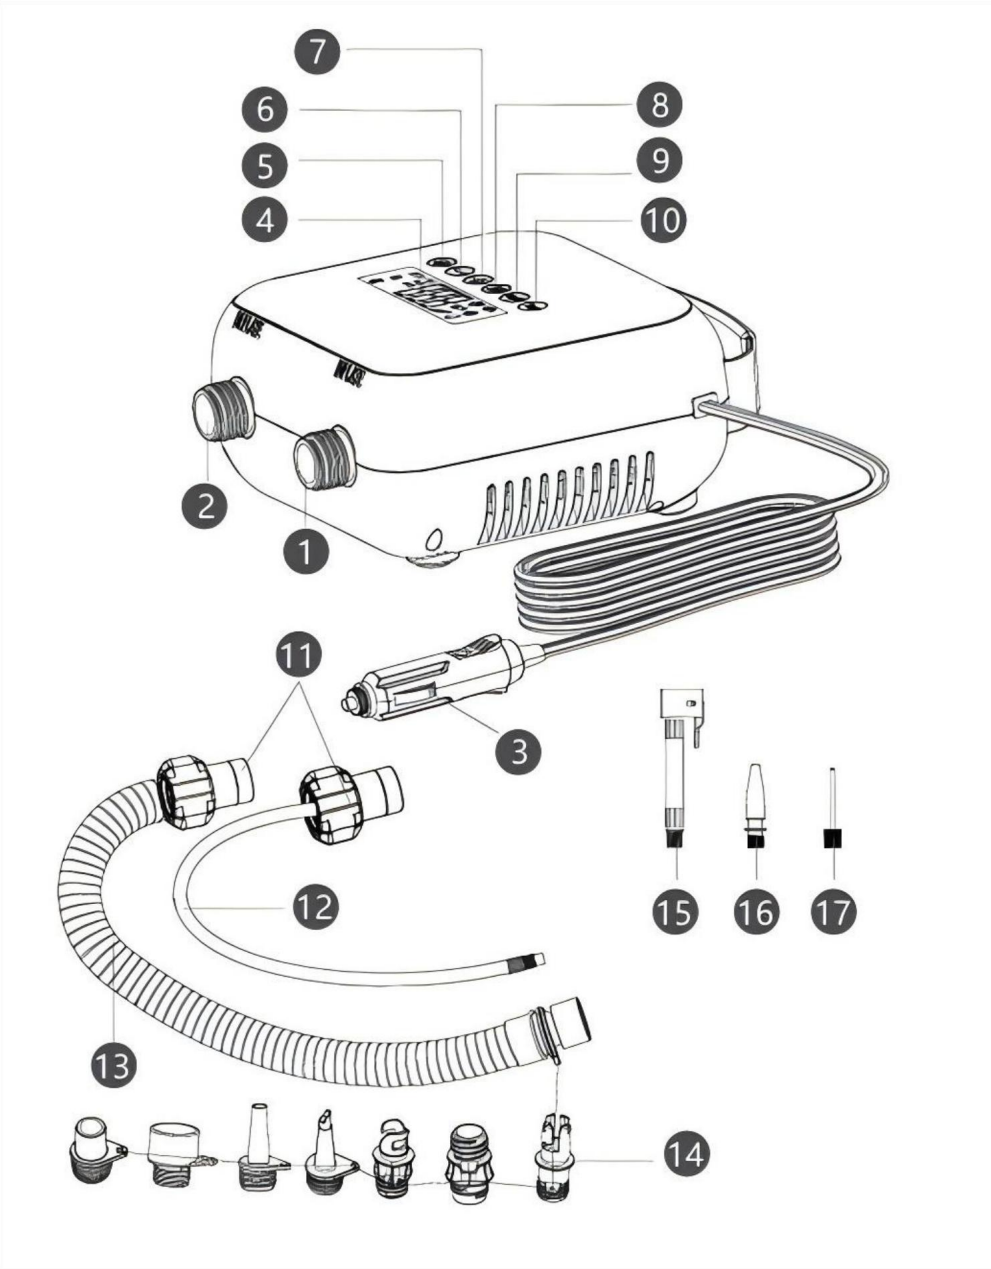

Machine Translated by Google

1	Inflationsinlopp	10	PSI-enhetsknapp
2	Deflationsuttag	11	Flexibel ledningsadapter
3	Cigarettändaruttag	12	Flätad slang
4	LED display	13	Plastslang
5	På/av-knapp	14	Luftmunstycke
6	Dekomprimeringsknapp	15	Slangkoppling
7	Tryckknapp	16	Plastventil
8	Scenomkopplarknapp	17	Kulnål
9	BAR-enhetsknapp		

VI. Inflationsoperation

* Tryck på Scene switch-knappen (M) för att växla mellan följande sex uppblåsbara scener:


Fritt läge: justerbart område: 0,5-20PSI


SUP-läge: standard 15PSI, justerbart område: 10-20PSI



Tältläge: standard 6PSI, justerbart område: 3-10PSI


Luftbäddsläge: standard 0,5PSI



Billäge: standard 2,5BAR, justerbart område: 1,7-2,75BAR



Basketläge: standard 8PSI, Justerbart område: 4-16PSI.


Machine Translated by Google


		
		
		
		
		
		

Machine Translated by Google

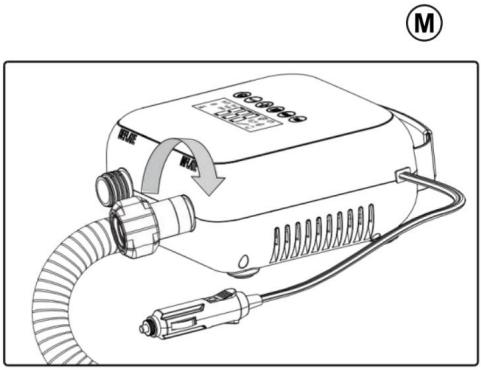



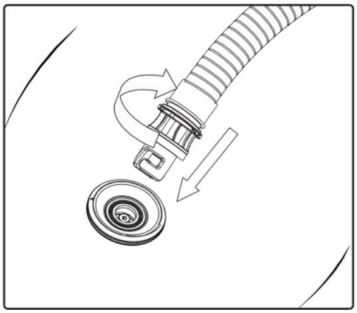


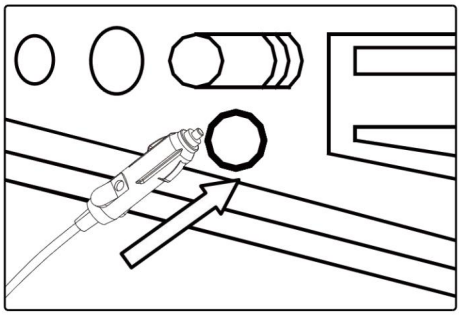


BAR PSI

Machine Translated by Google

BAR PSI

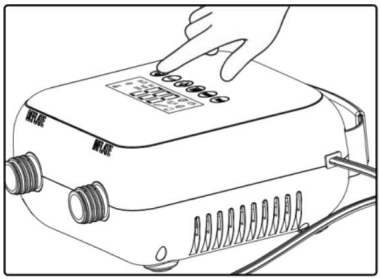

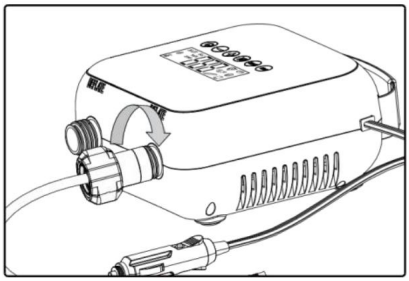


M

BAR PSI

Machine Translated by Google

BAR PSI

M

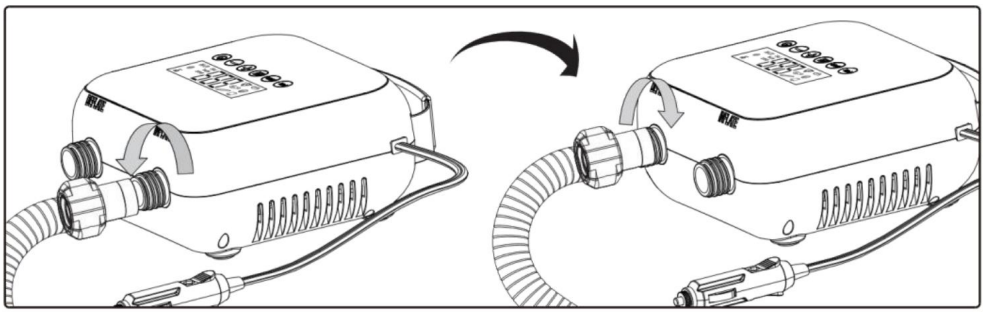


Machine Translated by Google



Machine Translated by Google

Machine Translated by Google

Machine Translated by Google



Machine Translated by Google




Machine Translated by Google

VEVOR

Affordable. Reliable. Home Improvement.

Machine Translated by Google

VEVOR
Affordable. Reliable. Home Improvement.

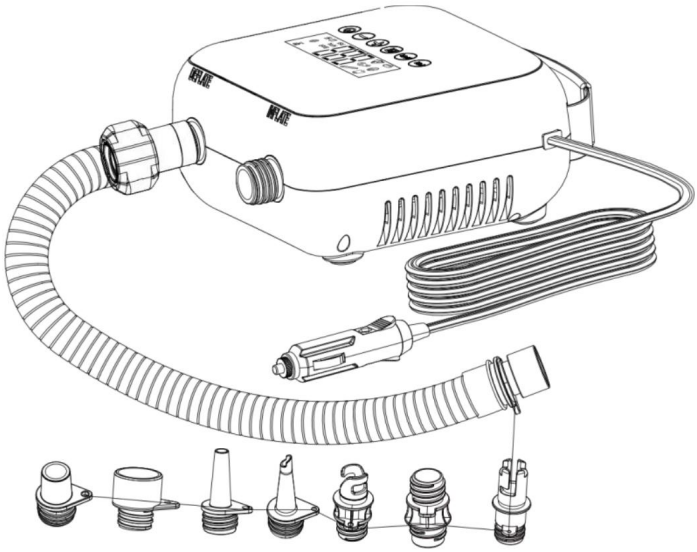

Machine Translated by Google

Machine Translated by Google

Machine Translated by Google

intelligent druksysteem. De luchtpomp stopt automatisch met opblazen wanneer de druk de vooraf ingestelde drukwaarde bereikt.







Dit product kan ook leeglopen en wanneer het opblaasbare product niet wordt gebruikt, Met de luchtpomp kunt u de lucht eruit pompen, zodat u de tas kunt opvouwen en opbergen.

III. Productparameters

Druk	0-40PSI	Ingangsspanning	DC12V


IV. Lijst met accessoires

Controleer of de volgende accessoires in de doos zitten voordat u het apparaat gebruikt. Als er accessoires ontbreken, neem dan contact op met de plaatselijke servicedienst.

Luchtpomp	Kunststof slang	Gevlochten slang
		
Instructieboek	**Afdichtring**	**Schoudertas**
		

V. Details van accessoires

Machine Translated by Google

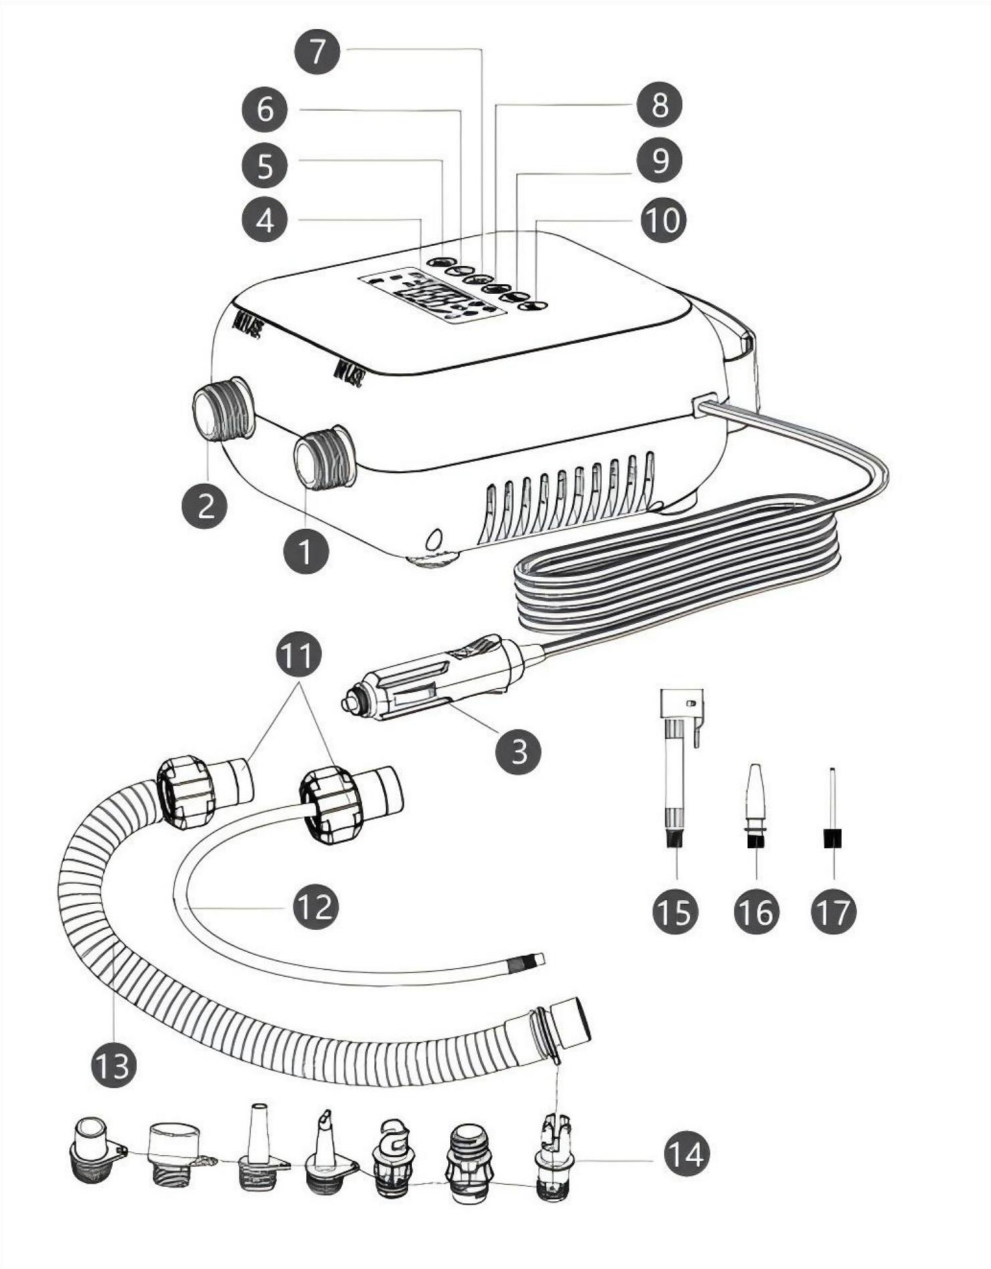

Machine Translated by Google


1	Inflatie-inlaat	10	PSI-eenheidknop
2	Deflatie uitlaat	11	Flexibele leidingadapter
3	Sigarettenaanstekerplug	12	Gevlochten slang
4	LED-scherm	13	Kunststof slang
5	Aan/uitknop	14	Luchtmondstuk
6	Decompressieknop	15	Slangkoppeling
7	Drukknop	16	Kunststof klep
8	Knop voor scènewissel	17	Balnaald
9	BAR-eenheidsknop		

VI. Inflatie-operatie


* Druk op de knop Scène-schakelaar (M) om te schakelen tussen de volgende zes opblaasbare scènes:


- Vrije modus: instelbaar bereik: 0,5-20 PSI
- SUP-modus: standaard 15PSI, instelbaar bereik: 10-20PSI
- Tentmodus: standaard 6PSI, instelbaar bereik: 3-10PSI
- Luchtbedmodus: standaard 0,5 PSI
- Automodus: standaard 2,5BAR, instelbaar bereik: 1,7-2,75BAR
- Basketbalmodus: standaard 8PSI, instelbaar bereik: 4-16PSI.


Machine Translated by Google


		
		
		
		
		
		

Machine Translated by Google

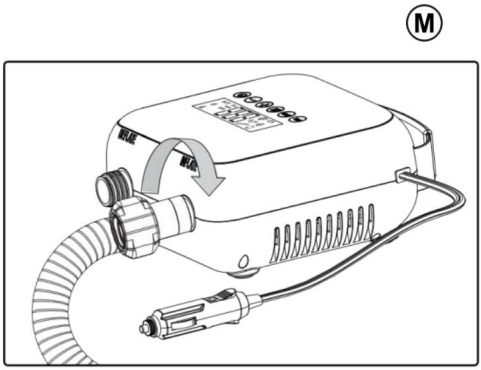



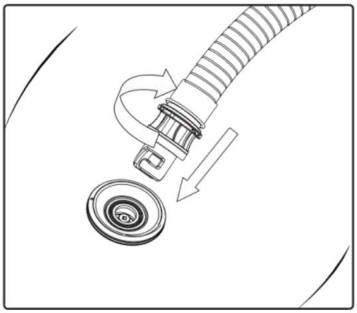


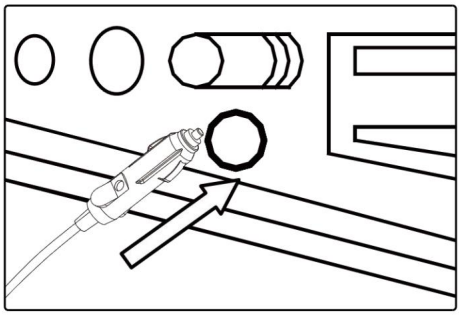


BAR PSI

Machine Translated by Google

BAR PSI

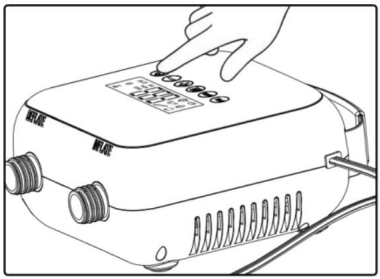

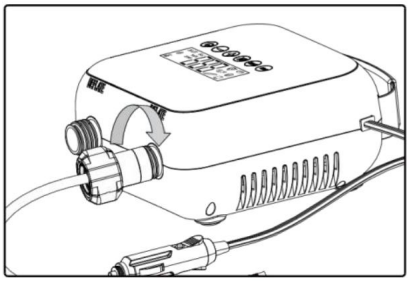


M

BAR PSI

Machine Translated by Google

BAR PSI

M

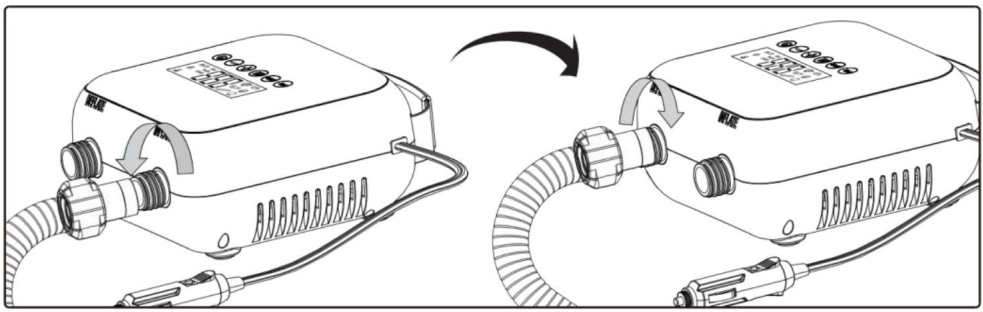


Machine Translated by Google



Machine Translated by Google

Machine Translated by Google

Machine Translated by Google



Machine Translated by Google

