VEVOR

Upgrade · The Home Creator Way

Sliding Door Track


MODEL: XC39SF-6FT

Video of installation

VEVOR
Upgrade·The Home Creator Way

Sliding Door Track

MODEL: XC39SF-6FT

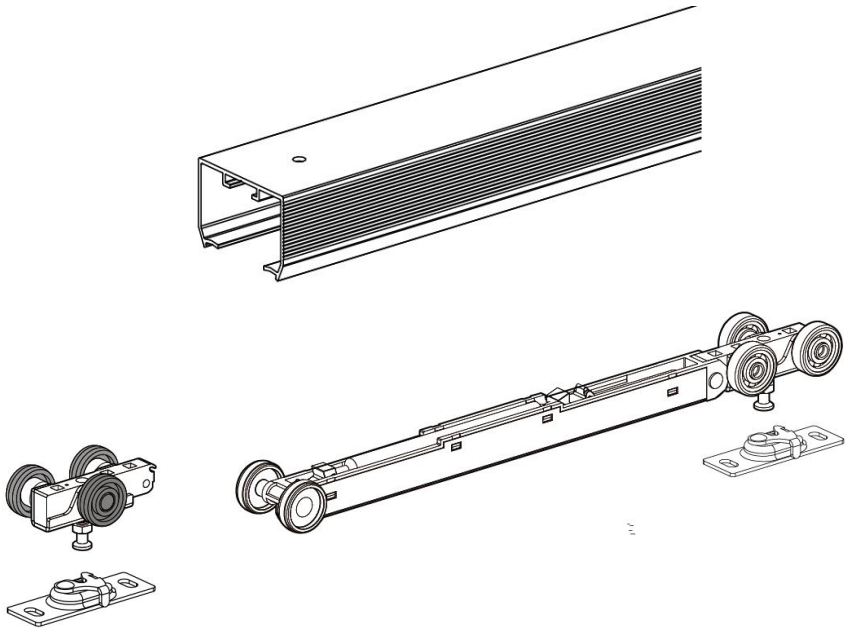

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

INSTRUCTIONS

Thank you very much for choosing this Sliding Door Track**.**

- Please read all of the instructions before using it. The information will help you achieve the best possible results.

The products carried in this catalog may be different in color than the actual item.

SAVE THESE INSTRUCTIONS

WARNING:

Ensure Health and Safety, local authority and general workshop practice regulations are adhered to when using tools.

***** DO NOT use tools if damaged.

***** Maintain tools in good and clean condition for best and safest performance.

***** Wear suitable clothing to avoid snagging. Do not wear loose jewellery and tie back long hair.

***** Account for all tools and parts being used.

***** If working off the vehicle, ensure that the workplace is secure and stable.

***** Do Not use these tools if you are tired or under the influence of alcohol, drugs or intoxicating medication.

***** PERSONAL SAFE TY WARNING!

Always Wear personal protective equipment.

*PERSONA L PROTECTIVE EQUIPMENT

1. Always wear impact safety goggles that provide front and side protection for the eyes. Eye protection equipment should comply with CSA Z94.3-07 or ANSI Z87.1 standards based on the type of work performed.
2. Wear gloves that provide protection based on the work materials or to reduce the effects of tool vibration.

CE

Conforms to relevant EU regulatory (CPR)305/2011 requirements.


Technical Parameters and Parts List

Technical Parameters	
Name	Sliding Door Track
Model	XC39SF-6FT
Track Classification	Single Track
Sliding Door Specification	6ft (Single Track, Single Set)
Track Dimensions	68.74"(1746mm)
Soft Close	Yes
Load Capacity	88LBS(40kg)
Appearance Color	Silver

(XC39SF-6FT) Parts List			
Name	Specification	Qty（pcs）	Notes
Track	/	1	Single
User Manual	/	1	
Hanger(Wheel Assembly)	/	1	With Soft Close
	/	1	Without Soft Close
Trigger	/	2	Supplied Installation Screws
Floor guide	/	2	
Bumper	/	1	
Wrench	/	1	
Allen wrench	/	1	
Wall-mounting Screws	/	10	9 for actual use, 1 extra from manufacturer
Hanger Wheel Screws	/	5	4 for actual use, 1 extra from manufacturer
Anti-Sway Device Screws	/	3	2 for actual use, 1 extra from manufacturer
Door Stop Screws	/	2	1 for actual use, 1 extra from manufacturer


Installation Manual

TOOLS REQUIRED

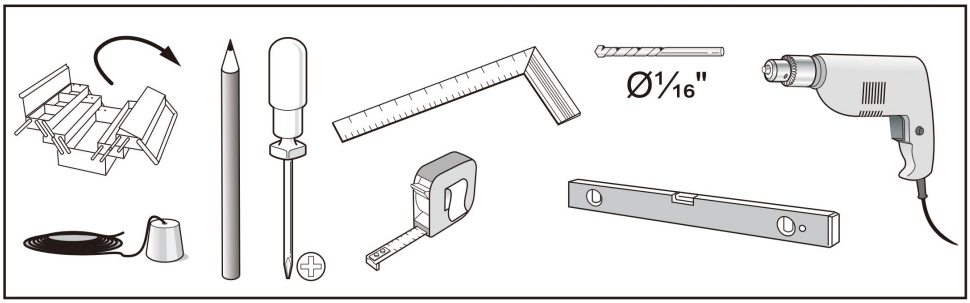

HARDWARE INCLUDED

1 Track




(x1)



ST4.2x32 (×9)

2

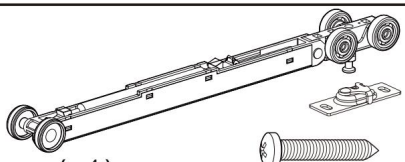


(x1)

ST5.5x32(x2)

3 Hanger



ST5.5x32(x2)



(x1)

4 Trigger



(x2)



M5x7 (x4)

5 Floor guide



ST4.2x13 (x2)




(x2)

6 Bumper




(x1)



ST4.2x32 (x1)

7 Wrench



(x1)

8 Allen wrench




2.5MM

Installation

1 **CONSTRUCT ROUGH OPENING**


1. Header must be SQUARE and PLUMB with tube and LEVEL.
2. Minimum Height is door height plus 3 ¼"(83MM).
3. Width is 2 X Door width plus 1"(25MM).
4. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
5. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

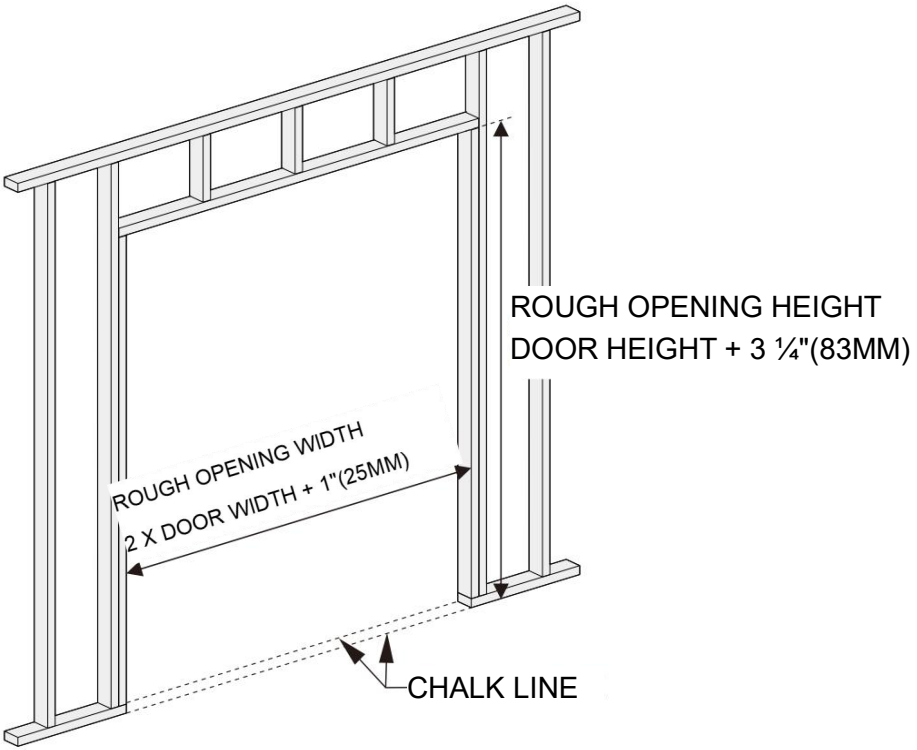

Installation


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

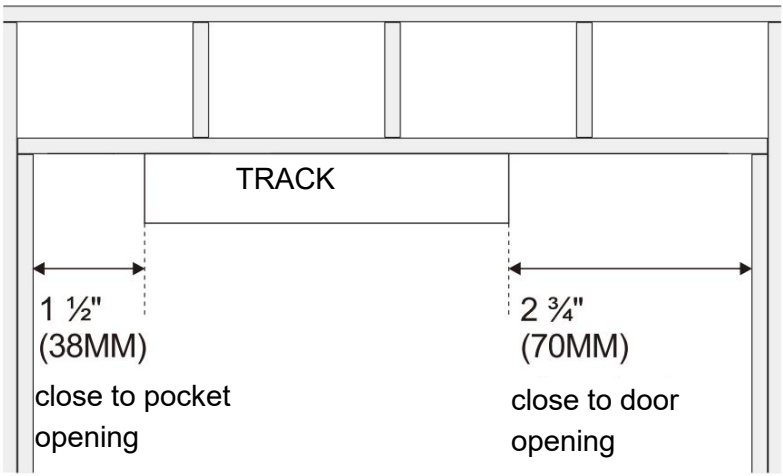

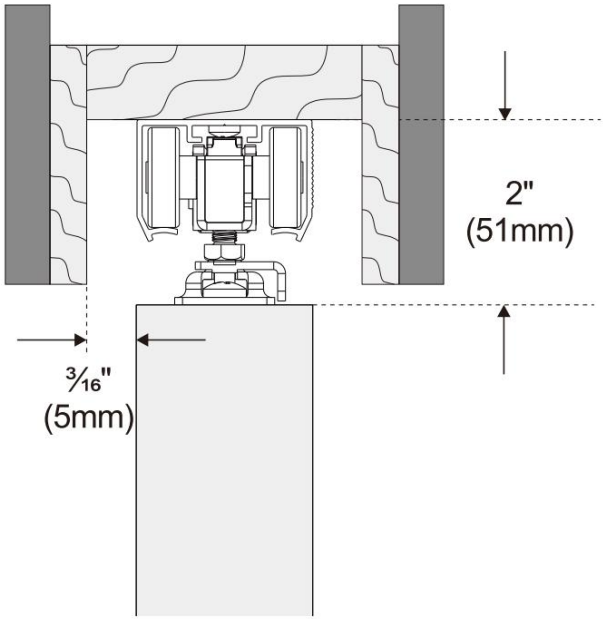


Installation

4 Using a pencil to mark the holes on the wall.

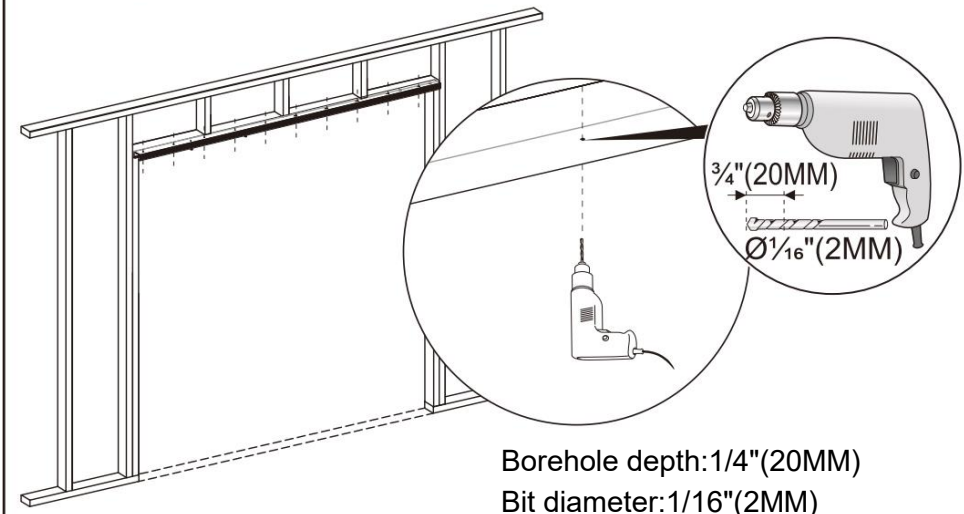


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

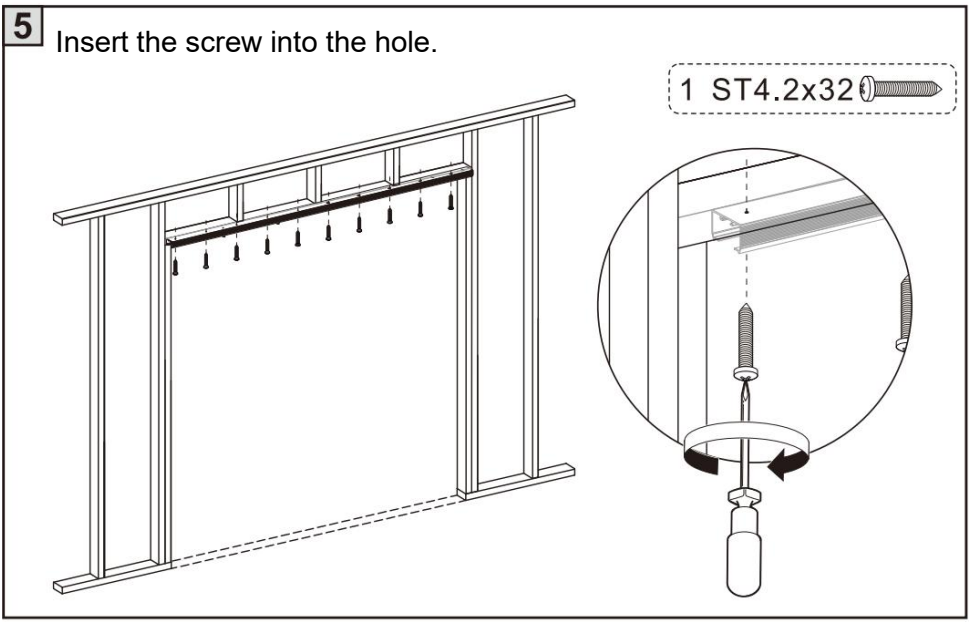

Installation


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

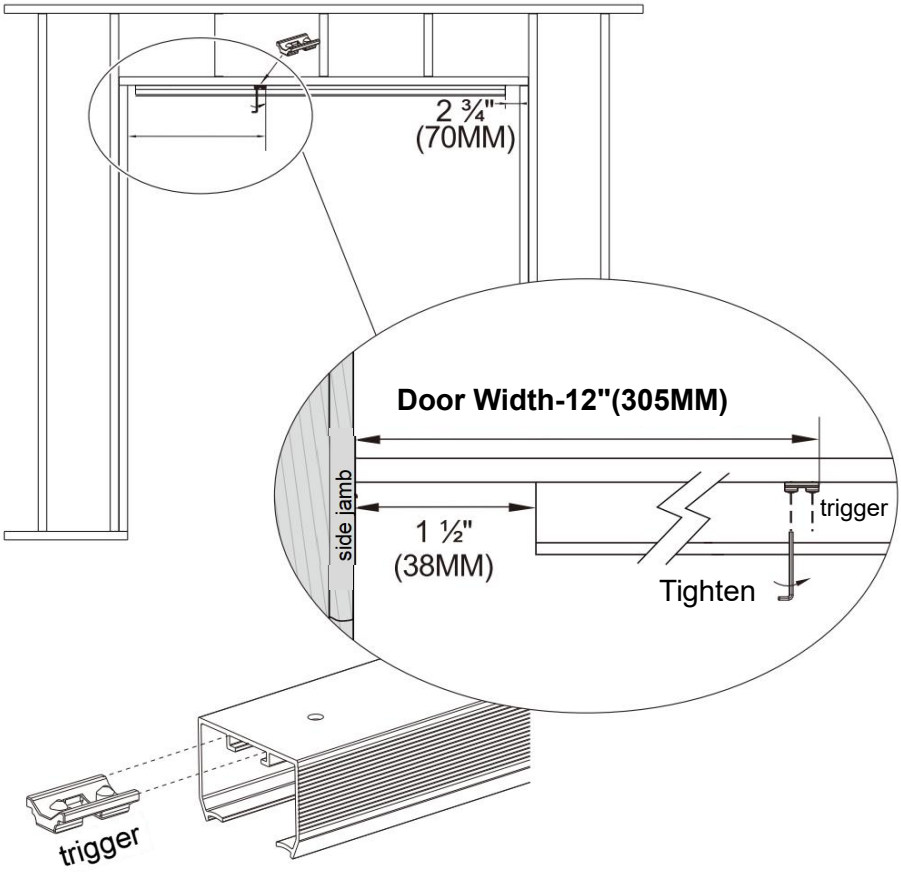

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Installation


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

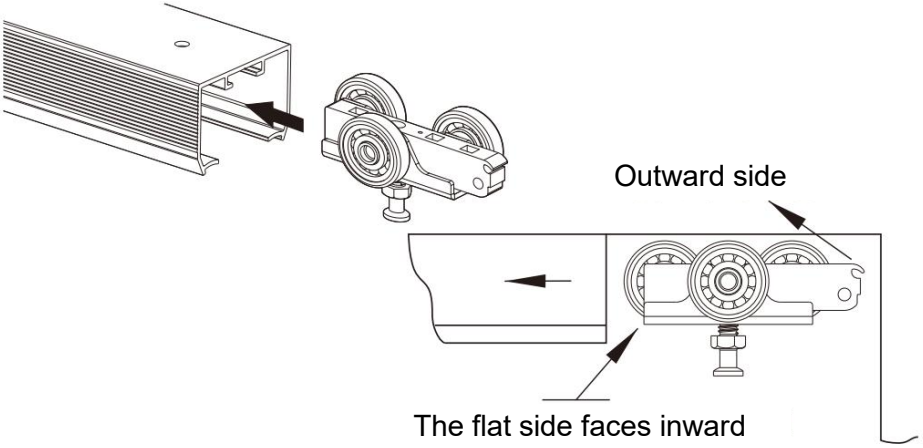

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

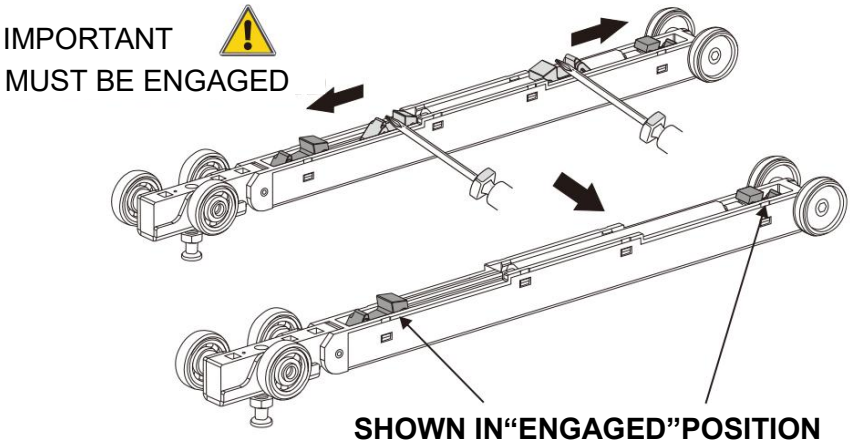


Installation

9

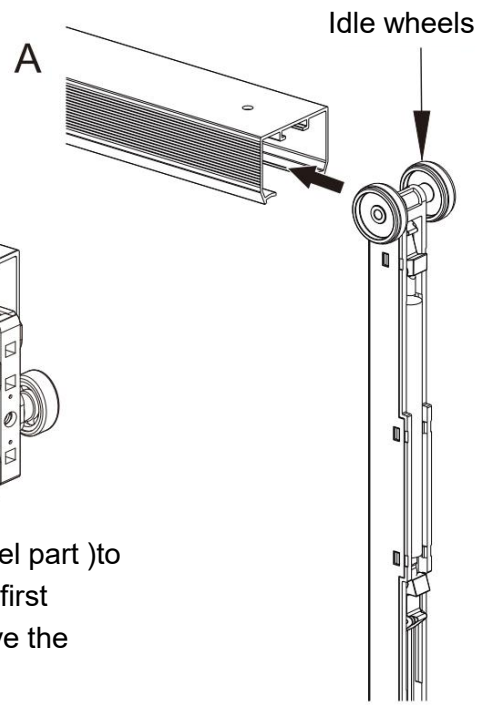

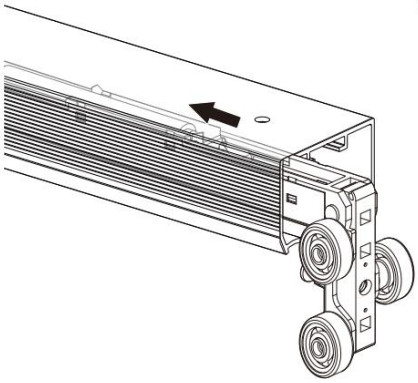


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

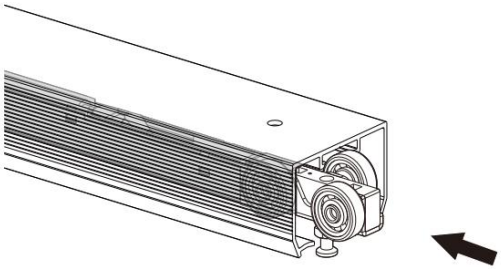





Installation

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

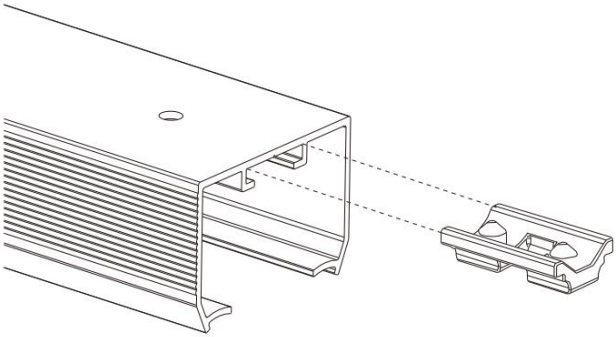

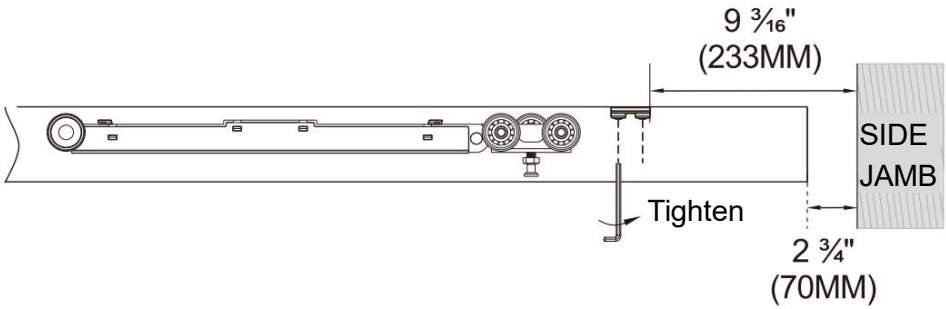




Installation

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

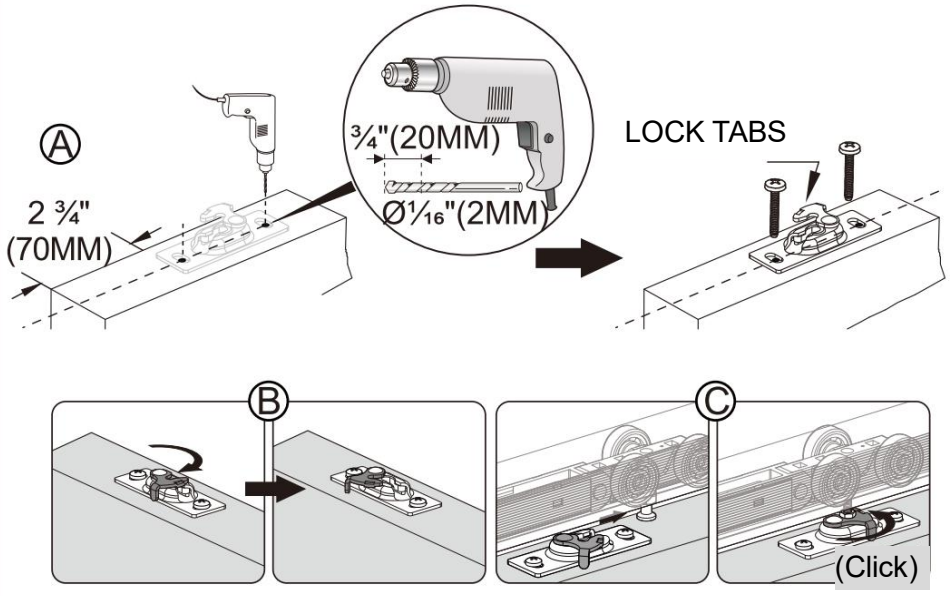

Use spanner to adjust door height.


Installation

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

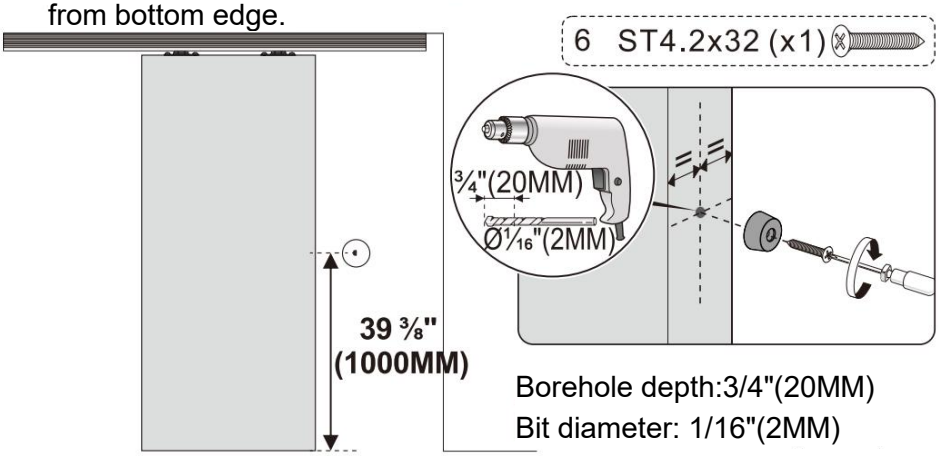

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

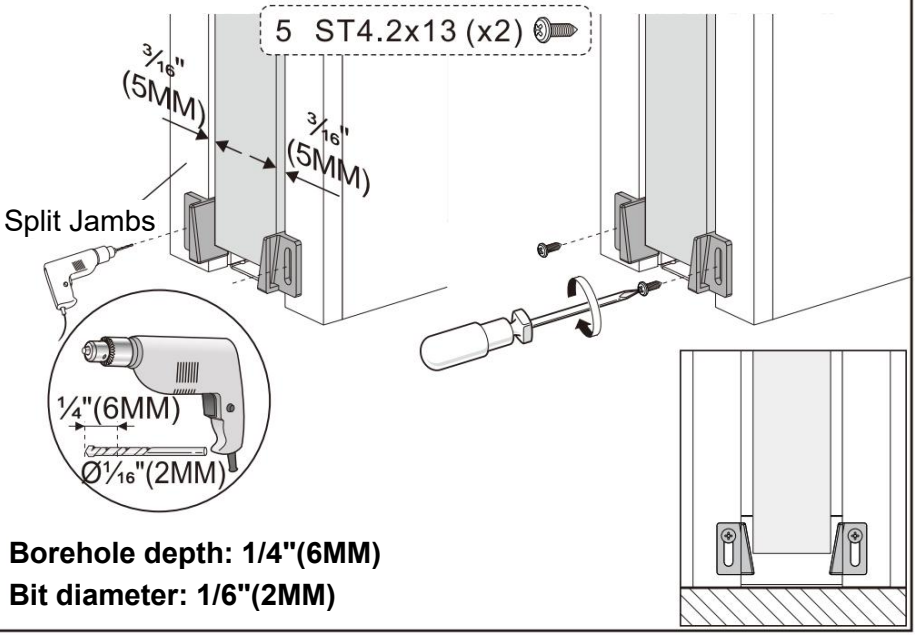

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

1. Avoid prolonged exposure to the sun to avoid aging.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Upgrade · The Home Creator Way

Riel para puerta corrediza


MODELO: XC39SF- 6 PIES

Vídeo de instalación

VEVOR
Upgrade·The Home Creator Way

Sliding Door Track

MODELO: XC39SF-6FT

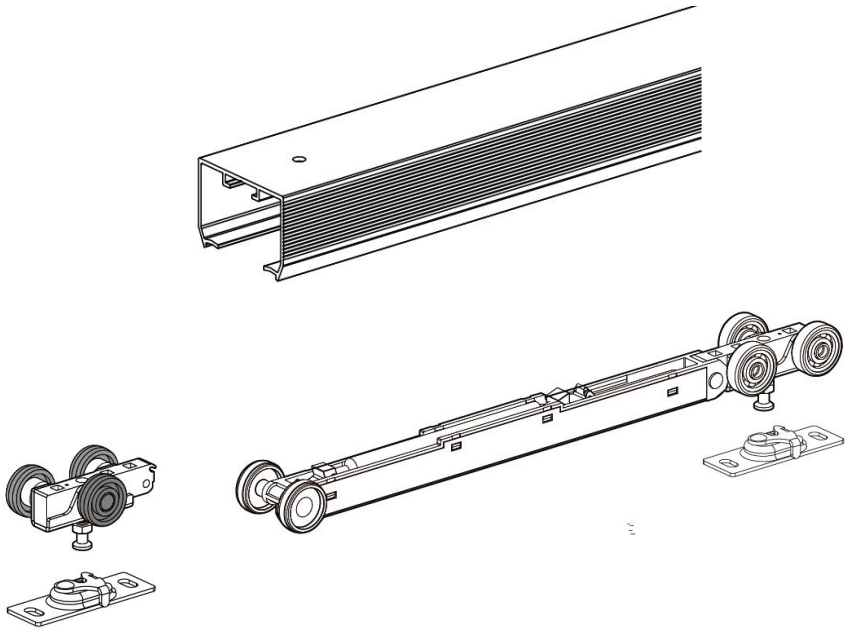

Estas son las instrucciones originales; lea atentamente todas las instrucciones del manual antes de utilizarlo. VEVOR se reserva el derecho de interpretar su manual de usuario. La apariencia del producto dependerá del producto que haya recibido. Le rogamos que nos disculpe si no le informamos de nuevo si hay actualizaciones tecnológicas o de software en nuestro producto.

INSTRUCTIONS

Muchas gracias por elegir este soporte para riel de puerta corrediza **.**
Lea todas las instrucciones antes de usarlo. Esta información le ayudará a obtener los mejores resultados posibles.
Los productos que aparecen en este catálogo pueden ser de color diferente al artículo real .

GUARDE ESTAS INSTRUCCIONES
ADVERTENCIA:
Garantizar la salud y la seguridad, las autoridades locales y las prácticas generales del taller.
Se respetan las normas al utilizar herramientas.
***** NO utilice herramientas si están dañadas.
***** Mantenga las herramientas en buenas condiciones y limpias para un rendimiento mejor y más seguro.
***** Use ropa adecuada para evitar enganches. No lleve joyas sueltas ni recoja el cabello largo.
***** Tenga en cuenta todas las herramientas y piezas que se utilizan.
***** Si trabaja fuera del vehículo, asegúrese de que el lugar de trabajo sea seguro y estable.
***** No utilice estas herramientas si está cansado o bajo la influencia de alcohol, drogas o medicamentos intoxicantes.
***** SEGURIDAD PERSONAL ¡ADVERTENCIA!
Use siempre equipo de protección personal.
***** EQUIPO DE PROTECCIÓN PERSONAL
1. Use siempre gafas de seguridad contra impactos que protejan los ojos frontal y lateralmente. El equipo de protección ocular debe cumplir con las normas CSA Z94.3-07 o ANSI Z87.1, según el tipo de trabajo realizado.
2. Use guantes que proporcionen protección según los materiales de trabajo o para reducir los efectos de la vibración de la herramienta.

CE

Cumple con los requisitos reglamentarios pertinentes de la UE (CPR)

305/2011 .

Parámetros técnicos y lista de piezas


Parámetros técnicos	
Nombre	Riel para puerta corrediza
Modelo	XC39SF-6FT
Clasificación de pistas	Pista única
Especificaciones de la puerta corrediza	6 pies (vía única, juego único)
Dimensiones de la pista	68,74 " (1746 mm)
Cierre suave	Sí
Capacidad de carga	88 libras (40 kg)
Apariencia Color	Plata

(XC39SF-6FT **) Lista de piezas**			
Nombre	Especificación	Cantidad (uds.)	Notas
Pista	/	1	Soltero
Manual del usuario	/	1	
Percha (conjunto de ruedas)	/	1	Con cierre suave
	/	1	Sin cierre suave
Desencadenar	/	2	Tornillos de instalación suministrados
Guía de suelo	/	2	
Parachoques	/	1	
Llave inglesa	/	1	
Allen llave inglesa	/	1	
Tornillos para montaje en pared	/	10	9 para uso real, 1 adicional del fabricante
Tornillos para ruedas de suspensión	/	5	4 para uso real, 1 adicional del fabricante
Tornillos del dispositivo antibalanceo	/	3	2 para uso real, 1 adicional del fabricante

Tornillos de tope de puerta	/	2	1 para uso real, 1 adicional del fabricante


Manual de instalación

HERRAMIENTAS REQUERIDO

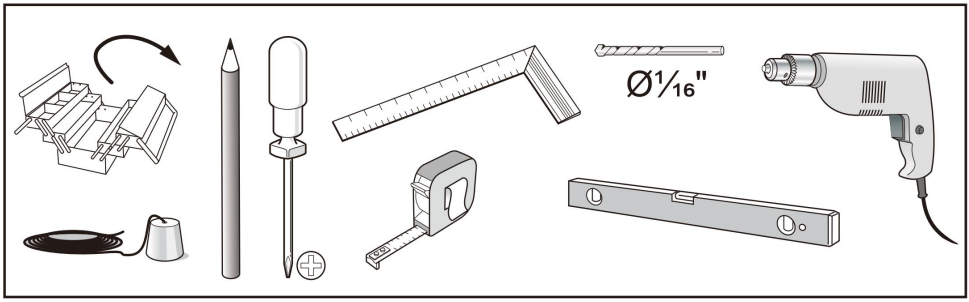

HARDWARE INCLUIDO

1 Track




(x1)



ST4.2x32 (×9)

2

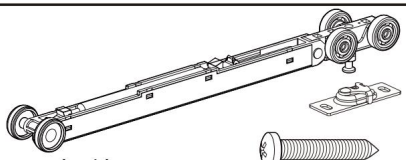


(x1)

ST5.5x32(x2)

3 Hanger



ST5.5x32(x2)



(x1)

4 Trigger



(x2)



M5x7 (x4)

5 Floor guide



ST4.2x13 (x2)




(x2)

6 Bumper




(x1)



ST4.2x32 (x1)

7 Wrench



(x1)

8 Allen wrench




2.5MM

Instalación

1 **CONSTRUCT ROUGH OPENING**


6. Header must be SQUARE and PLUMB with tube and LEVEL.
7. Minimum Height is door height plus 3 ¼"(83MM).
8. Width is 2 X Door width plus 1"(25MM).
9. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
10. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

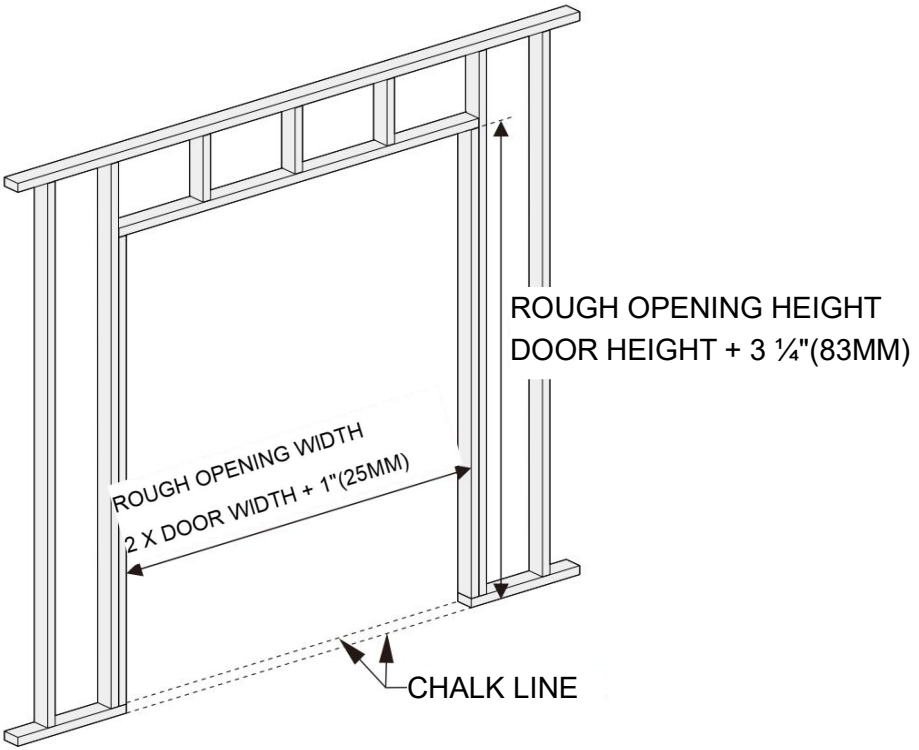

Instalación


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

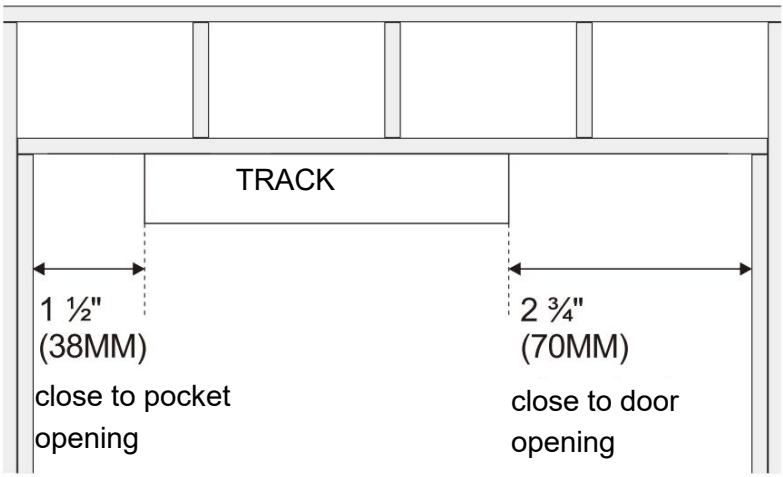

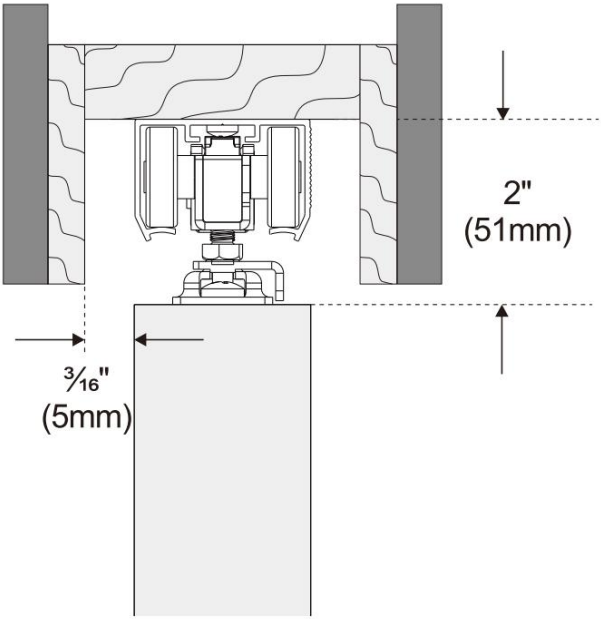


Instalación

4 Using a pencil to mark the holes on the wall.

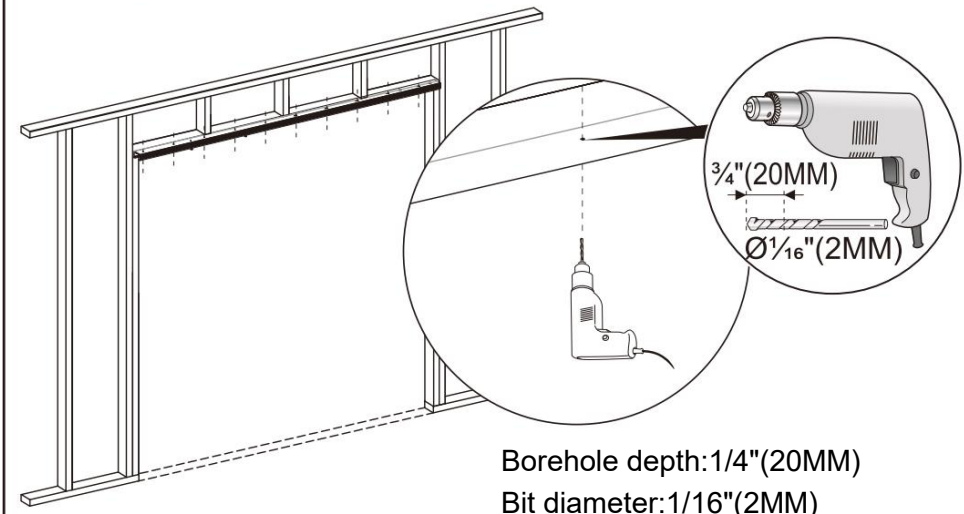


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

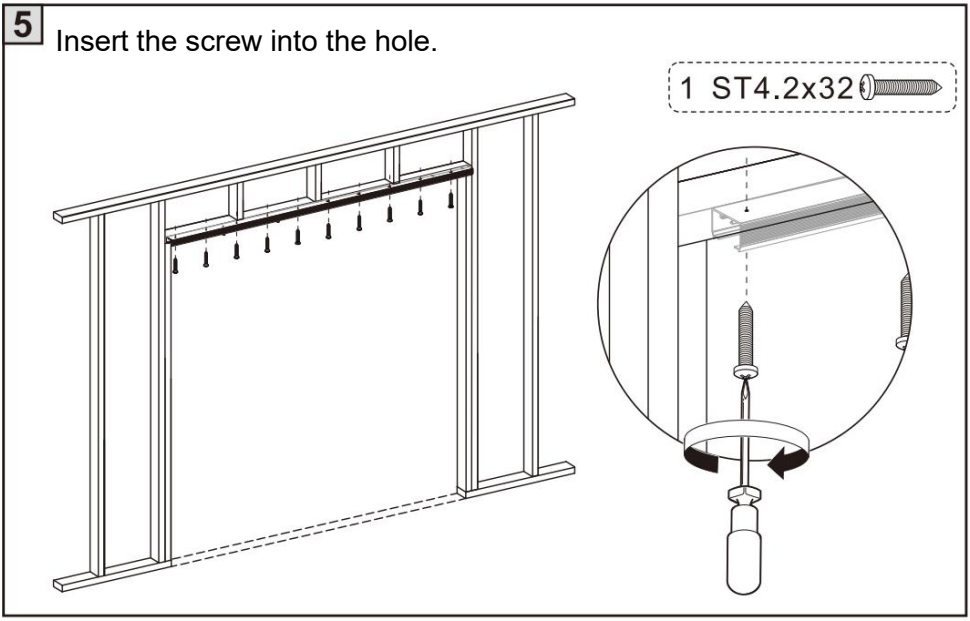

Instalación


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

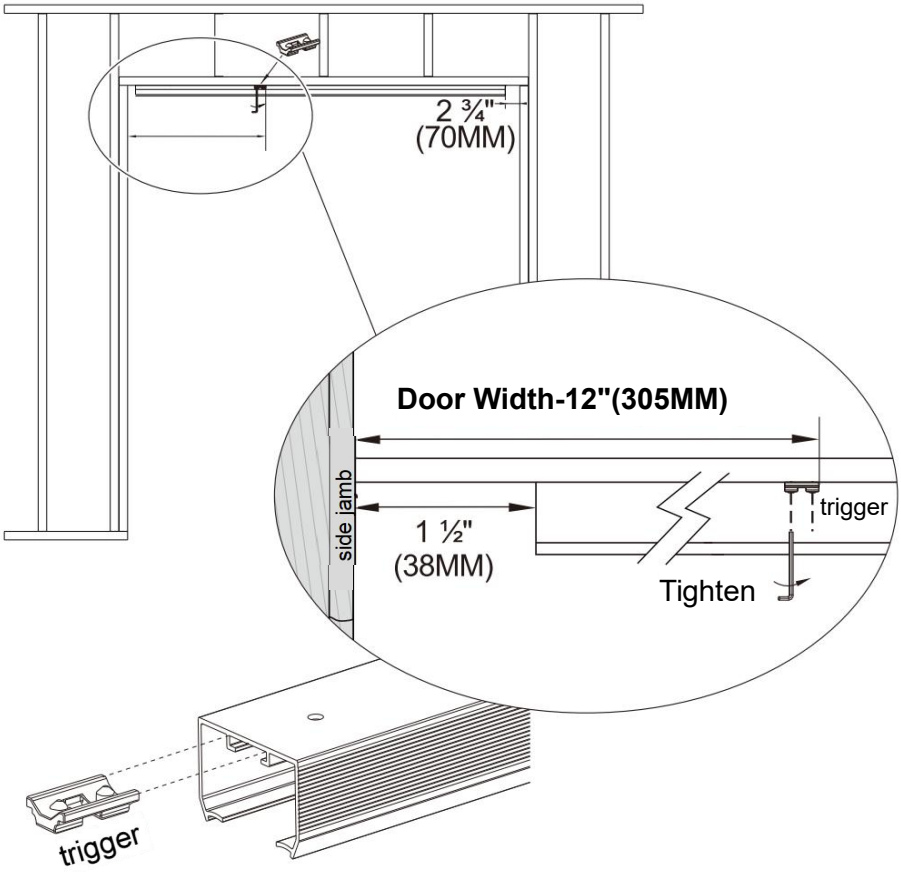

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Instalación


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

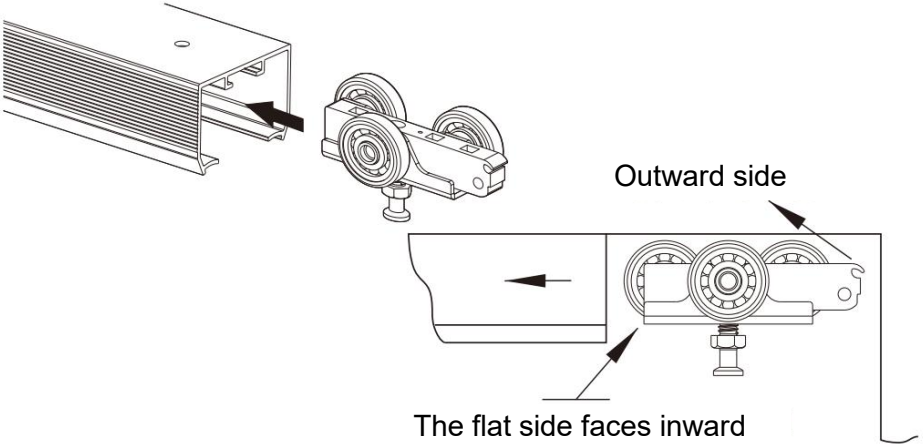

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

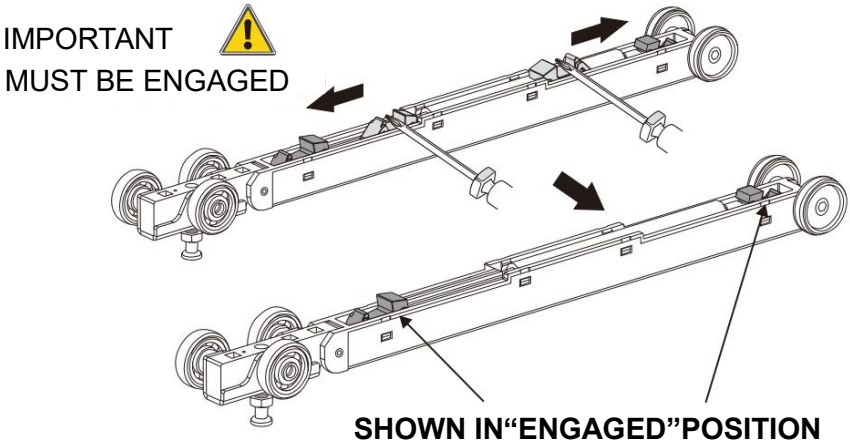


Instalación

9

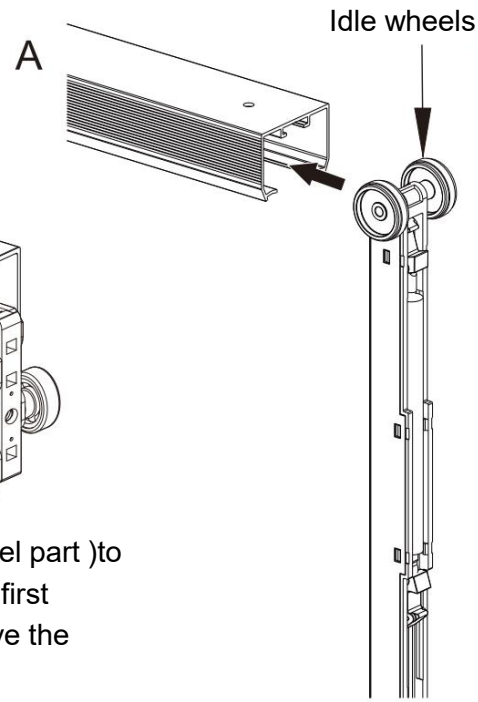

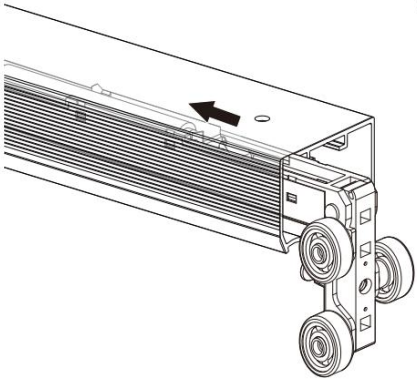


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

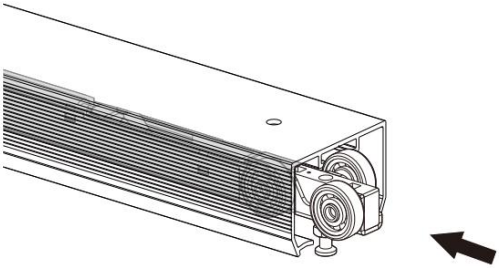





Instalación

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

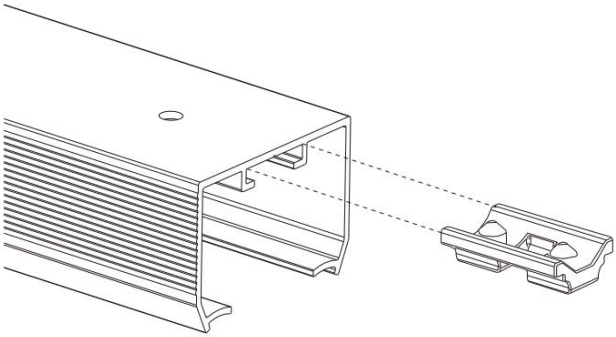

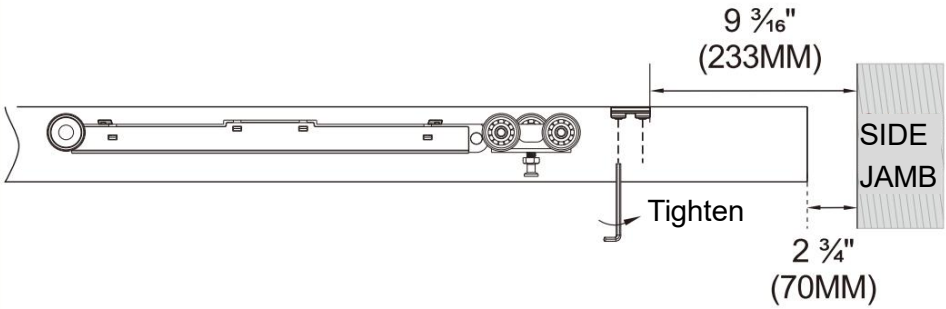




Instalación

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

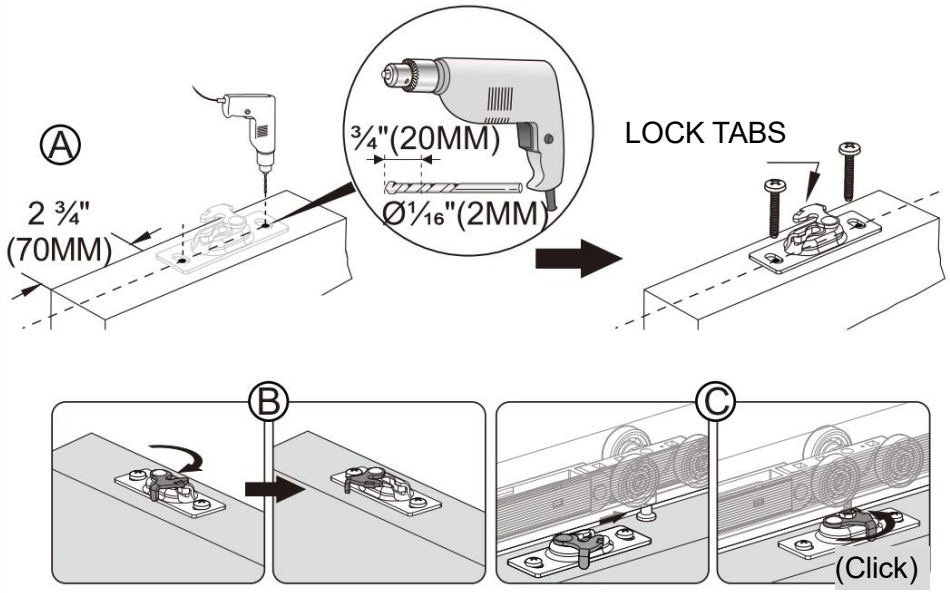

Use spanner to adjust door height.


Instalación

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

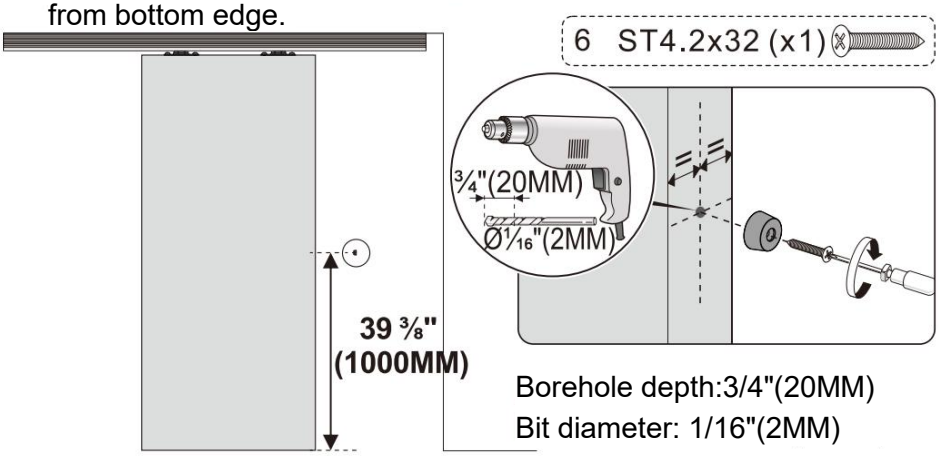

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

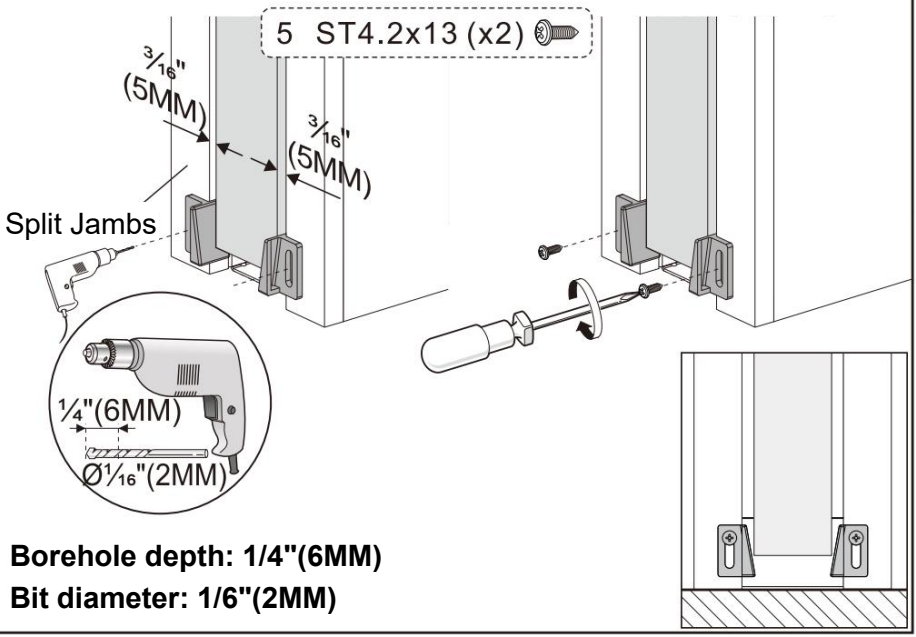

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

2. Evite la exposición prolongada al sol para evitar el envejecimiento.

Fabricante: Shanghaimuxinmuyeyouxiangongsi
Dirección: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghái 200000 CN.
Importado a AUS: SIHAO PTY LTD. 1 ROKEVA STREET EASTWOOD NSW 2122 Australia
Importado a EE. UU.: Sanven Technology Ltd. Suite 250, 9166 Anaheim Lugar, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Upgrade · The Home Creator Way


Skjutdörrspår

MODELL: XC39SF - 1,8 METER

Video av installationen

Sliding Door Track

MODELL: XC39SF-6FT

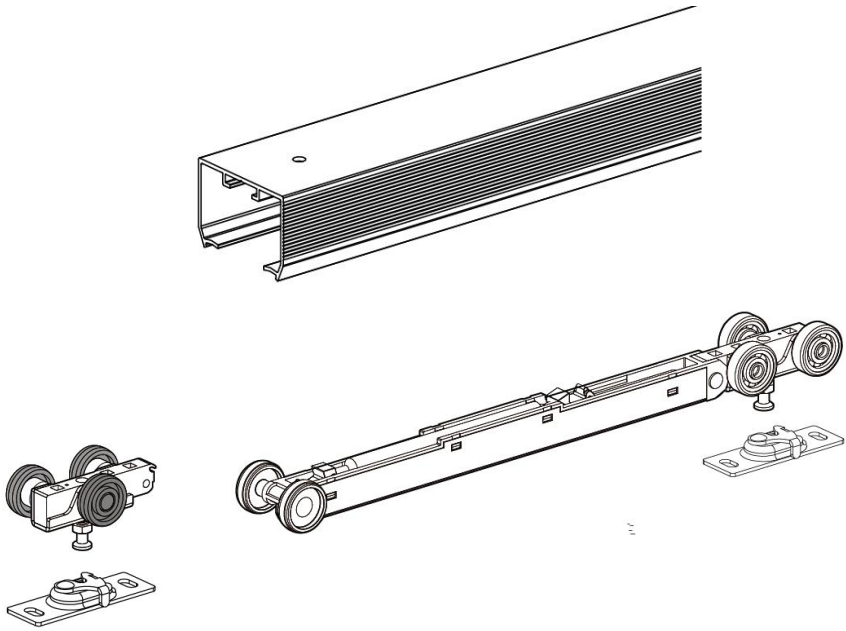

Detta är originalinstruktionerna, vänligen läs alla instruktioner noggrant innan du använder produkten. VEVOR förbehåller sig en tydlig tolkning av vår användarmanual. Produktens utseende ska vara beroende av den produkt du mottagit. Vi ber om ursäkt för att vi inte kommer att informera dig igen om det finns några teknik- eller programuppdateringar för vår produkt.

INSTRUCTIONS

Tack så mycket för att du valde **detta** skjutdörrsskenställ .

- Läs igenom alla instruktioner innan du använder den. Informationen hjälper dig att uppnå bästa möjliga resultat.

Produkterna i den här katalogen kan ha en annan färg än den faktiska varan .

SPARA DESSA INSTRUKTIONER

VARNING:

Säkerställ hälsa och säkerhet, lokala myndigheters och allmän verkstadspraxis
föreskrifter följs vid användning av verktyg.

***** ANVÄND INTE verktyg om de är skadade.

***** Håll verktygen i gott och rent skick för bästa och säkraste prestanda.

***** Använd lämpliga kläder för att undvika att fastna. Bär inte lösa smycken och sätt inte upp långt hår.

***** Redovisa alla verktyg och delar som används.

***** Om du arbetar utanför fordonet, se till att arbetsplatsen är säker och stabil.

***** Använd inte dessa verktyg om du är trött eller påverkad av alkohol, droger eller berusande läkemedel.

***** PERSONLIG SÄKERHET VARNING!

Använd alltid personlig skyddsutrustning.

***** PERSONLIG SKYDDSUTRUSTNING

1. Använd alltid skyddsglasögon som ger skydd för ögonen framifrån och från sidan. Ögonskydd ska uppfylla standarderna CSA Z94.3-07 eller ANSI Z87.1 baserat på vilken typ av arbete som utförs.
2. Använd handskar som ger skydd baserat på arbetsmaterialet eller för att minska effekterna av verktygsvibrationer.

CE

Uppfyller relevanta EU-förordningar (CPR) 305/2011 .


Tekniska parametrar och reservdelslista

Tekniska parametrar	
Namn	Skjutdörrsspår
Modell	XC39SF-6FT
Banklassificering	Enkelspår
Skjutdörrsspecifikation	1,8 meter (enkelspår, enkel uppsättning)
Spårmått	68,74 tum (1746 mm)
Mjuk stängning	Ja
Lastkapacitet	40 kg
Utseende Färg	Silver

(XC39SF-6FT) **Dellista**			
Namn	Specifikation	Antal (st)	Anteckningar
Spåra	/	1	Enda
Användarmanual	/	1	
Hängare (hjulmontering)	/	1	Med mjuk stängning
	/	1	Utan mjukstängning
Utlösare	/	2	Medföljande installationsskruvar
Golvguide	/	2	
Stötfångare	/	1	
Rycka	/	1	
Allen rycka	/	1	
Väggmonteringsskruvar	/	10	9 för faktisk användning, 1 extra från tillverkaren
Hjulskruvar för hängare	/	5	4 för faktisk användning, 1 extra från tillverkaren
Skruvar för antisvängningsanordning	/	3	2 för faktisk användning, 1 extra från tillverkaren
Dörrstoppsskruvar	/	2	1 för faktisk användning, 1 extra från tillverkaren


Installationsmanual

VERKTYG NÖDVÄNDIG

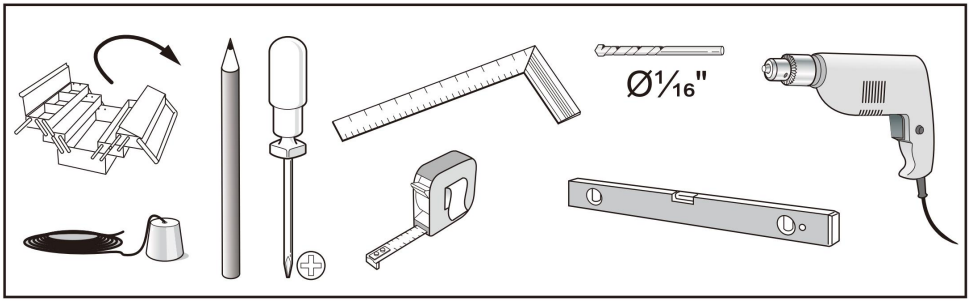

HÅRDVARA INGÅR

1 Track




(x1)



ST4.2x32 (×9)

2

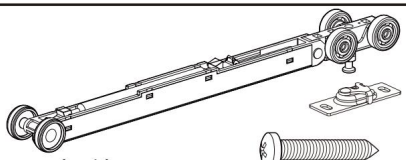


(x1)

ST5.5x32(x2)

3 Hanger



ST5.5x32(x2)



(x1)

4 Trigger



(x2)



M5x7 (x4)

5 Floor guide



ST4.2x13 (x2)




(x2)

6 Bumper




(x1)



ST4.2x32 (x1)

7 Wrench



(x1)

8 Allen wrench




2.5MM

Installation

1 **CONSTRUCT ROUGH OPENING**


11. Header must be SQUARE and PLUMB with tube and LEVEL.
12. Minimum Height is door height plus 3 ¼"(83MM).
13. Width is 2 X Door width plus 1"(25MM).
14. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
15. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

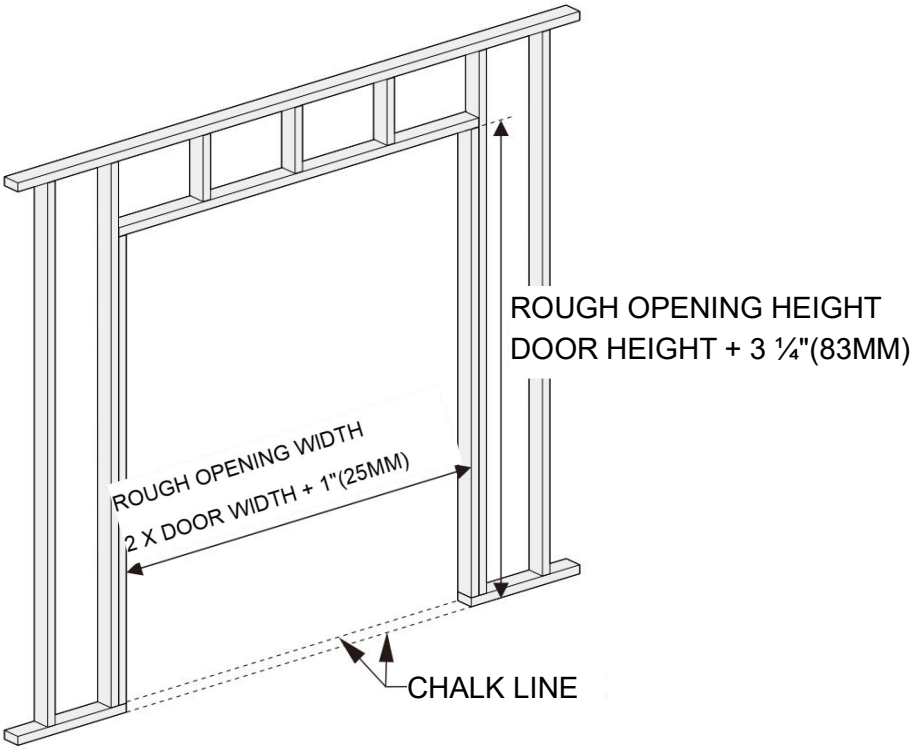

Installation


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

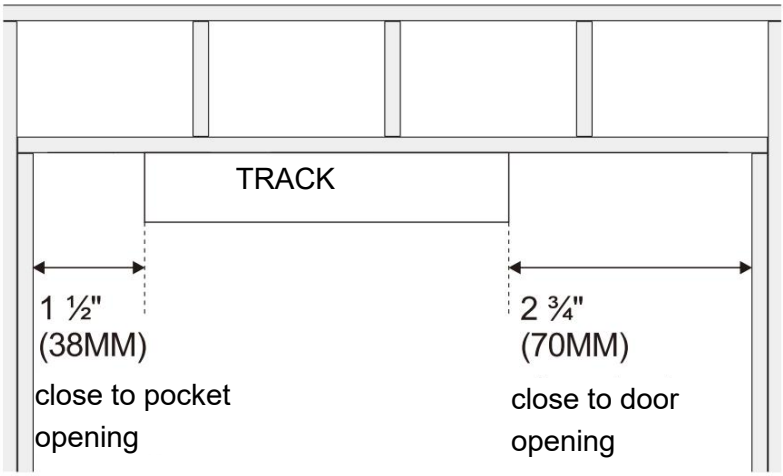

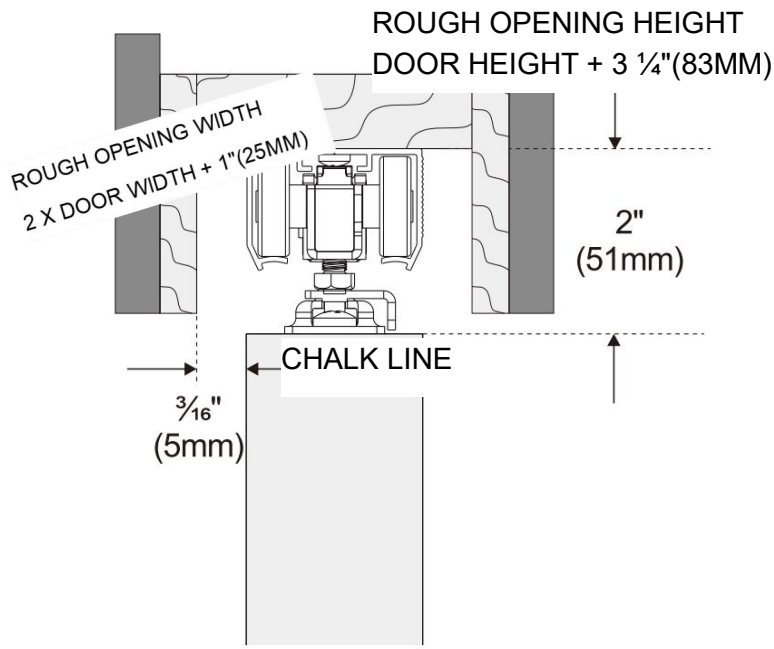


Installation

4 Using a pencil to mark the holes on the wall.

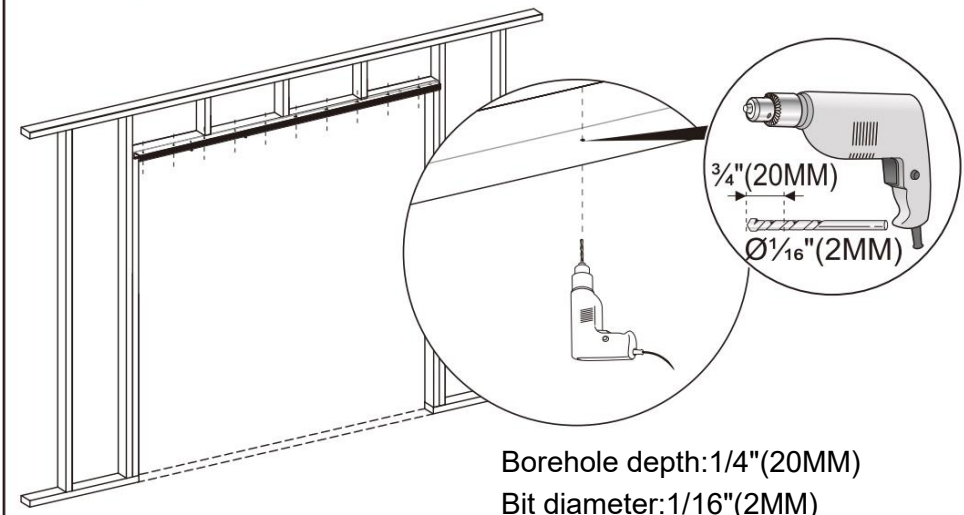


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

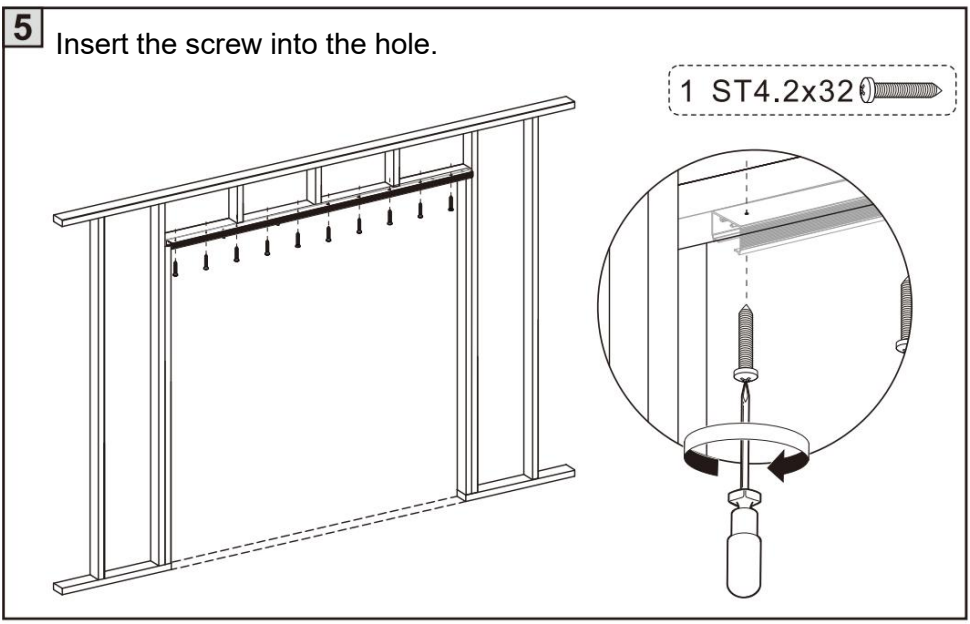

Installation


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

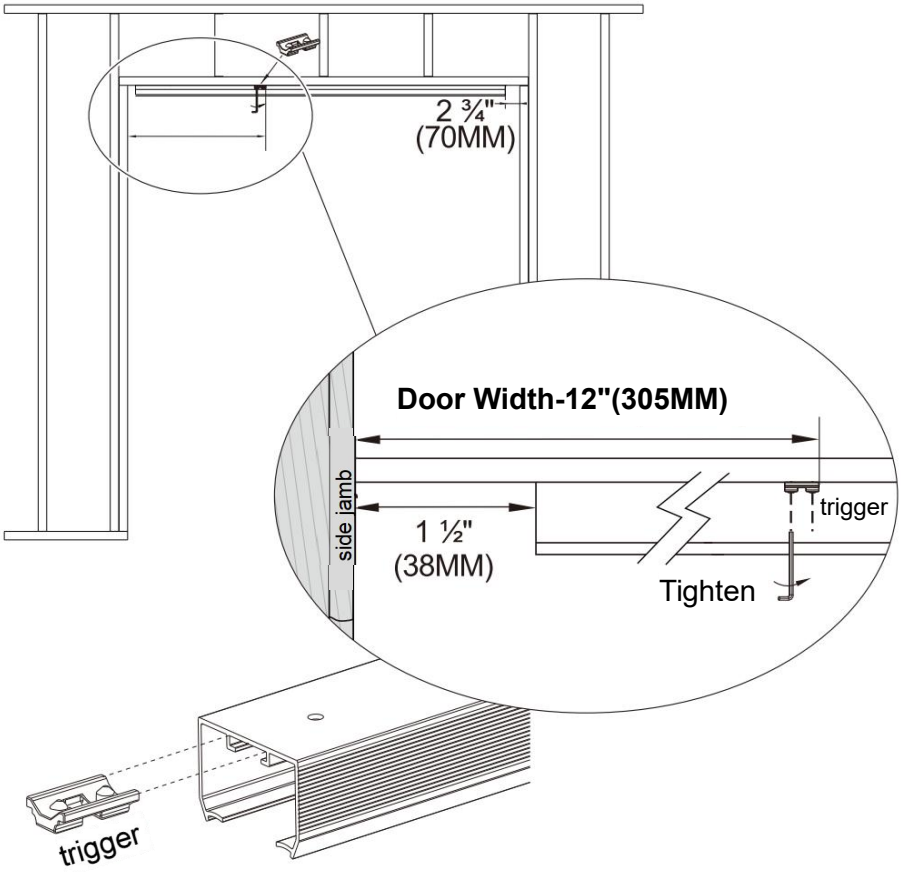

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Installation


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

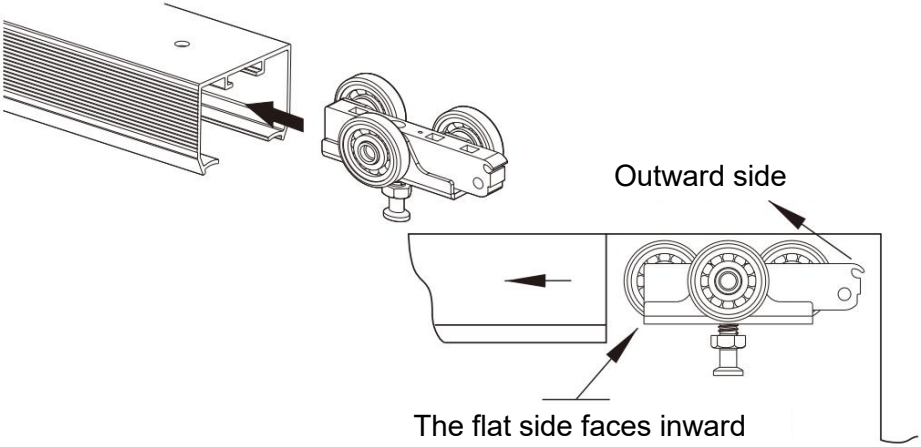

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

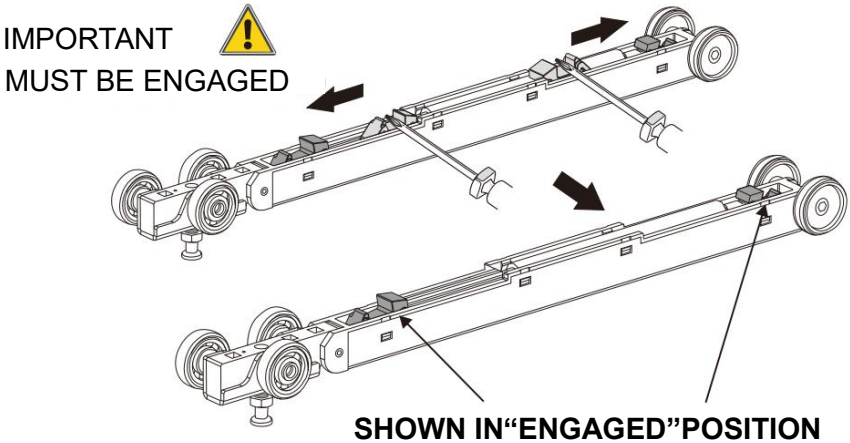


Installation

9

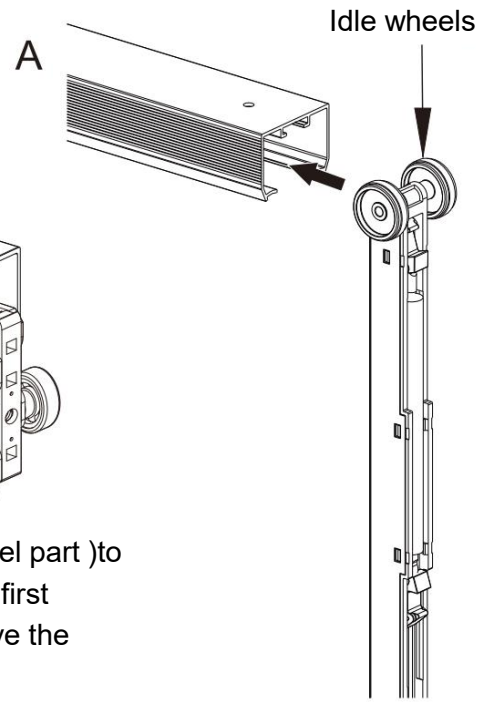

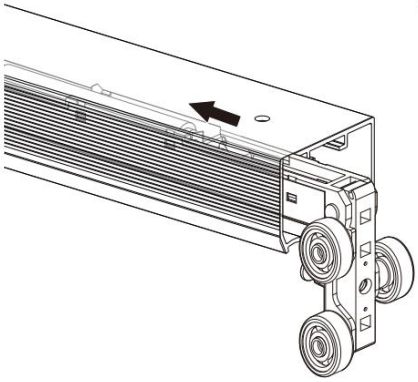


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

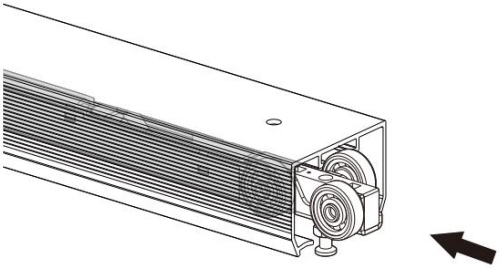





Installation

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

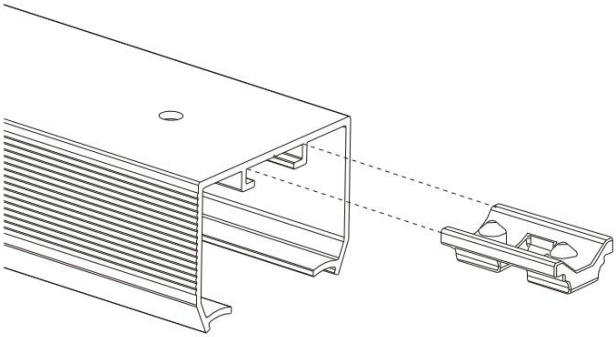

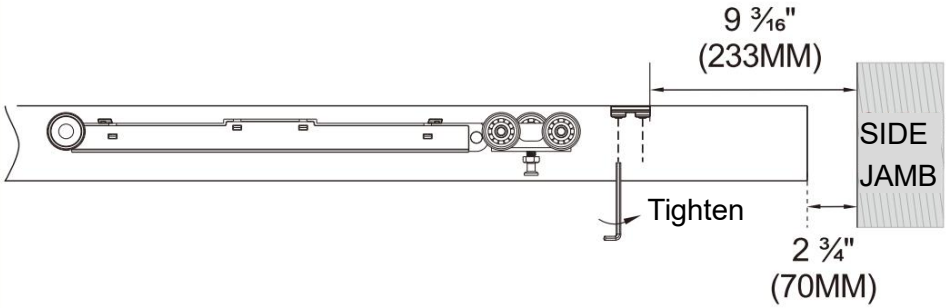




Installation

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

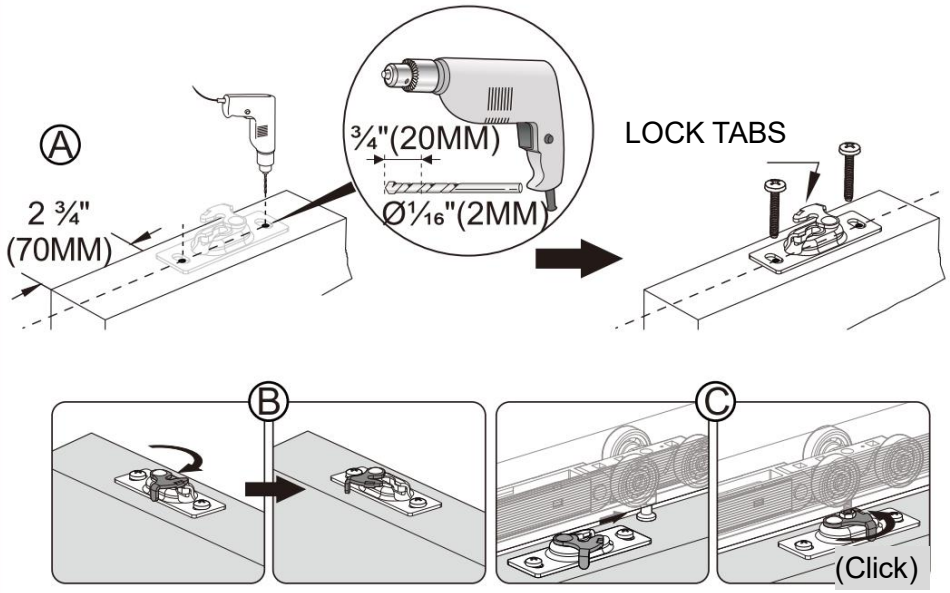

Use spanner to adjust door height.


Installation

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

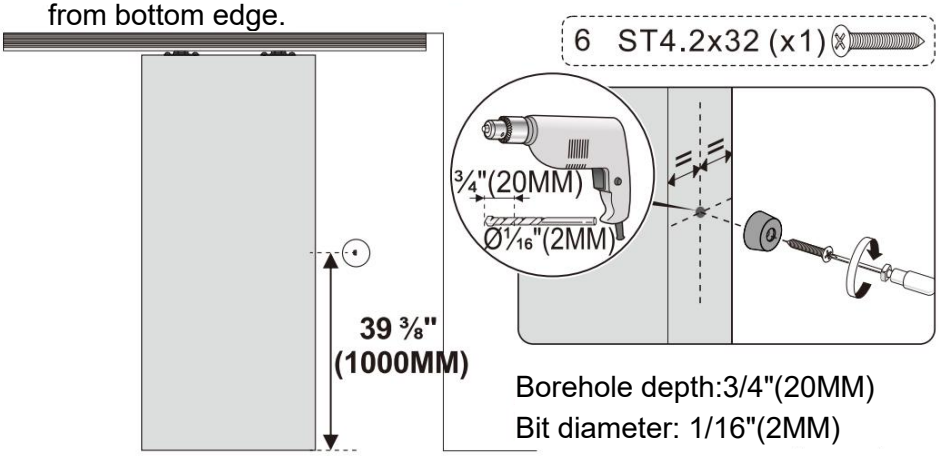

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

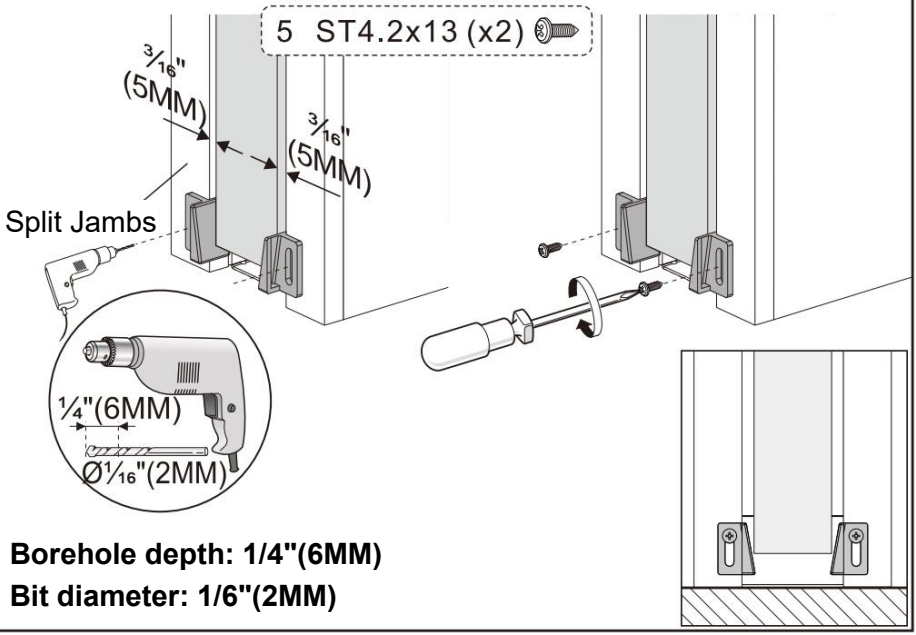

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

3. Undvik långvarig exponering för solen för att förhindra åldrande.

Tillverkare: Shanghaimuxinmuyeyouxiangongsi
Adress: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghai 200 000 kanadensiska republiken.
Importerad till Australien: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD
NSW 2122 Australien
Importerad till USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Plats, Rancho Cucamonga, Kalifornien 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Upgrade · The Home Creator Way

Schuifdeurrail


MODEL: XC39SF- 6 FT

Video van de installatie

VEVOR
Upgrade·The Home Creator Way

Sliding Door Track

MODEL: XC39SF-6FT

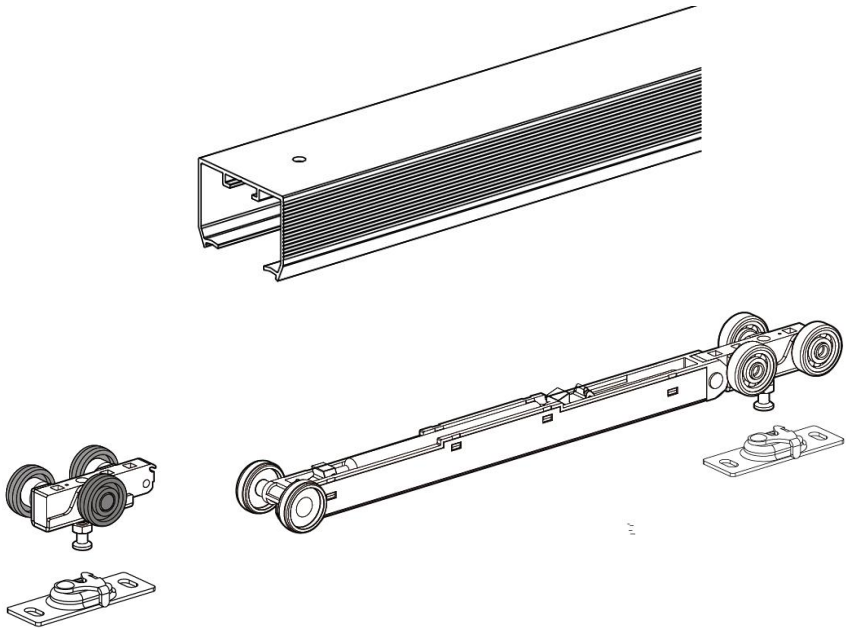

Dit is de originele handleiding. Lees alle instructies zorgvuldig door voordat u het product gebruikt. VEVOR behoudt zich het recht voor om de gebruiksaanwijzing duidelijk te interpreteren. Het uiterlijk van het product is afhankelijk van het product dat u hebt ontvangen. Neemt u het ons niet kwalijk dat we u niet meer op de hoogte stellen van eventuele technologische of software-updates voor ons product.

INSTRUCTIONS

Hartelijk dank dat u voor deze schuifdeurrail hebt **gekozen** .

- Lees alle instructies aandachtig door voordat u het product gebruikt. Deze informatie helpt u de best mogelijke resultaten te behalen.

De in deze catalogus vermelde producten kunnen qua kleur afwijken van het daadwerkelijke artikel .

BEWAAR DEZE INSTRUCTIES

WAARSCHUWING:

Zorg voor gezondheid en veiligheid, lokale autoriteiten en algemene werkplaatspraktijken
bij het gebruik van gereedschap worden de voorschriften in acht genomen.

***** GEBRUIK GEEN gereedschap als het beschadigd is.

***** Zorg ervoor dat het gereedschap in goede en schone staat verkeert voor de beste en veiligste prestaties.

***** Draag geschikte kleding om vasthaken te voorkomen. Draag geen losse sieraden en bind lang haar vast.

***** Houd bij welke gereedschappen en onderdelen u gebruikt.

***** Als u buiten het voertuig werkt, zorg er dan voor dat de werkplek veilig en stabiel is.

*** Gebruik** deze hulpmiddelen niet als u moe bent of onder invloed bent van alcohol, drugs of bedwelmende medicijnen.

***** PERSOONLIJKE VEILIGHEIDSWAARSCHUWING!

Draag altijd persoonlijke beschermingsmiddelen.

***** PERSOONLIJKE BESCHERMINGSMIDDELEN

1. Draag altijd een veiligheidsbril die de ogen aan de voor- en zijkant beschermt. Oogbescherming moet voldoen aan de CSA Z94.3-07- of ANSI Z87.1-normen, afhankelijk van het soort werk dat wordt uitgevoerd.
2. Draag handschoenen die bescherming bieden op basis van het materiaal waarmee wordt gewerkt of om de effecten van gereedschapstrillingen te verminderen.

CE

Voldoet aan de relevante EU-regelgeving (CPR) 305/2011 .

Technische parameters en onderdelenlijst


Technische parameters	
Naam	Schuifdeurrail
Model	XC39SF-6FT
Spoorclassificatie	Enkel spoor
Schuifdeur specificatie	6ft (Enkel spoor, enkele set)
Spoorafmetingen	68,74 inch (1746 mm)
Zacht sluiten	Ja
Laadvermogen	40 kg
Uiterlijk Kleur	Zilver

(XC39SF-6FT **)** **Onderdelenlijst**			
Naam	Specificatie	Aantal (stuks)	Notities
Spoor	/	1	Enkel
Gebruikershandleiding	/	1	
Hanger (wielmontage)	/	1	Met Soft Close
	/	1	Zonder softclose
Trekker	/	2	Meegeleverde installatieschroeven
Vloergids	/	2	
Bumper	/	1	
Moersleutel	/	1	
Allen moersleutel	/	1	
Schroeven voor wandmontage	/	10	9 voor daadwerkelijk gebruik, 1 extra van de fabrikant
Schroeven voor het ophangwiel	/	5	4 voor daadwerkelijk gebruik, 1 extra van de fabrikant
Schroeven voor anti-sway-apparaat	/	3	2 voor daadwerkelijk gebruik, 1 extra van de fabrikant

Deurstopschroeven	/	2	1 voor daadwerkelijk gebruik, 1 extra van de fabrikant


Installatiehandleiding

HULPMIDDELEN VEREIST

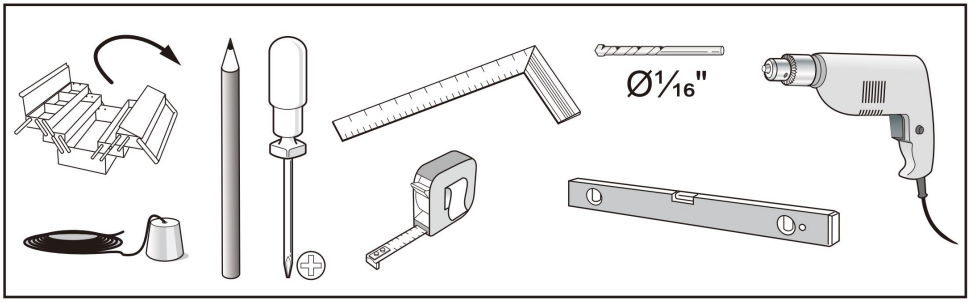

HARDWARE INBEGREPEN

1 Track




(x1)



ST4.2x32 (×9)

2

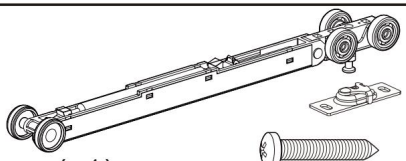


(x1)

ST5.5x32(x2)

3 Hanger



ST5.5x32(x2)



(x1)

4 Trigger



(x2)



M5x7 (x4)

5 Floor guide



ST4.2x13 (x2)




(x2)

6 Bumper




(x1)



ST4.2x32 (x1)

7 Wrench



(x1)

8 Allen wrench




2.5MM

Installatie

1 **CONSTRUCT ROUGH OPENING**


16. Header must be SQUARE and PLUMB with tube and LEVEL.
17. Minimum Height is door height plus 3 ¼"(83MM).
18. Width is 2 X Door width plus 1"(25MM).
19. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
20. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

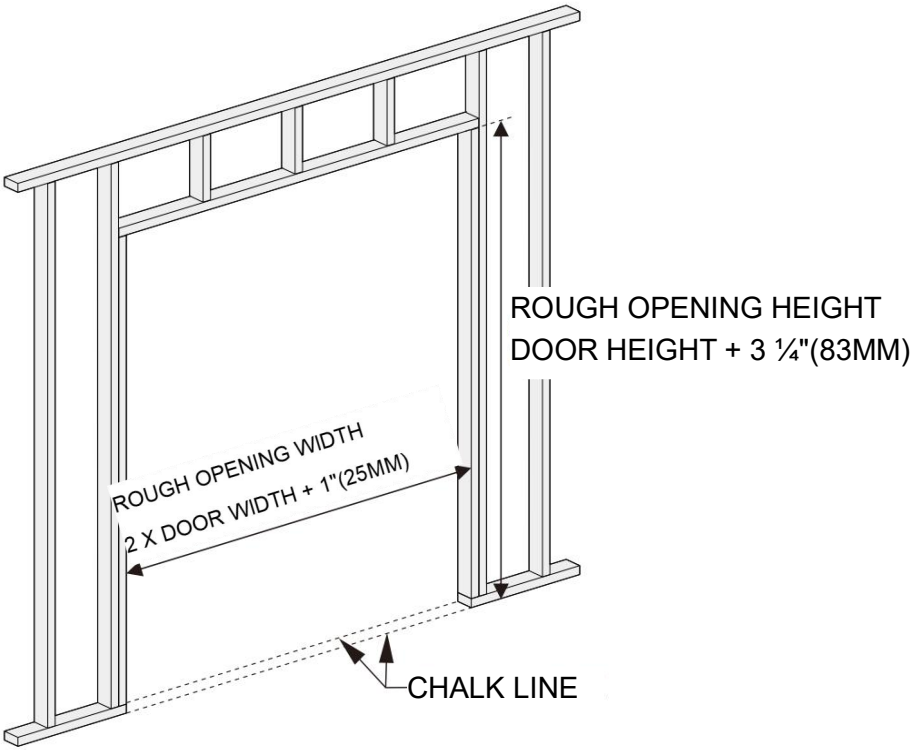

Installatie


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

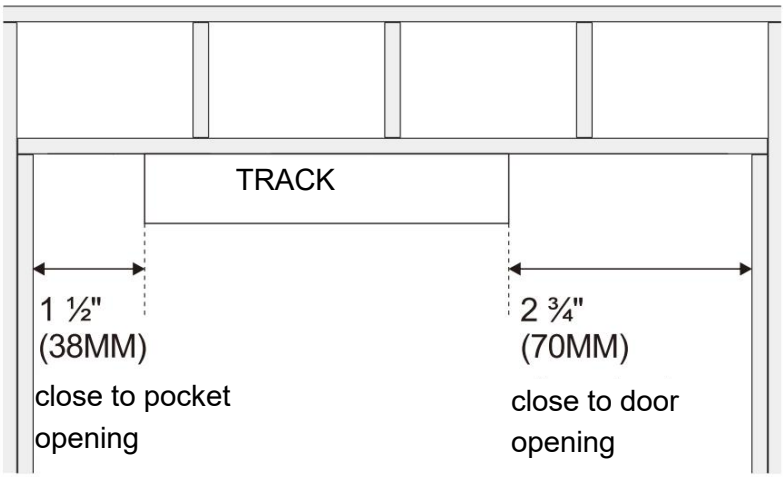

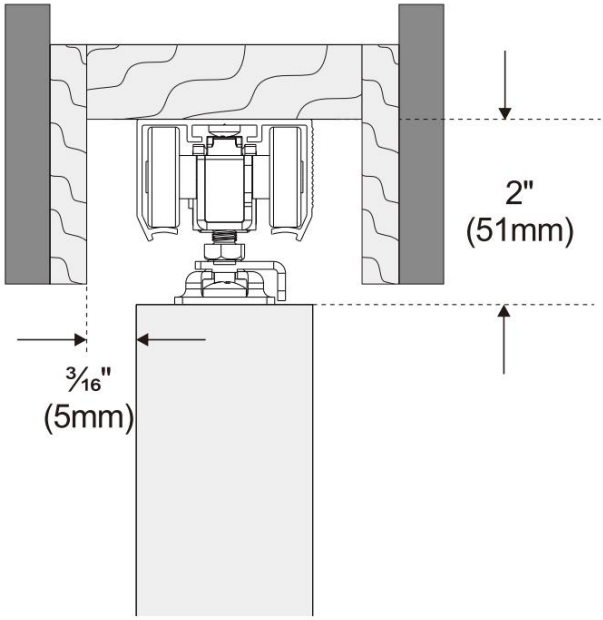


Installatie

4 Using a pencil to mark the holes on the wall.

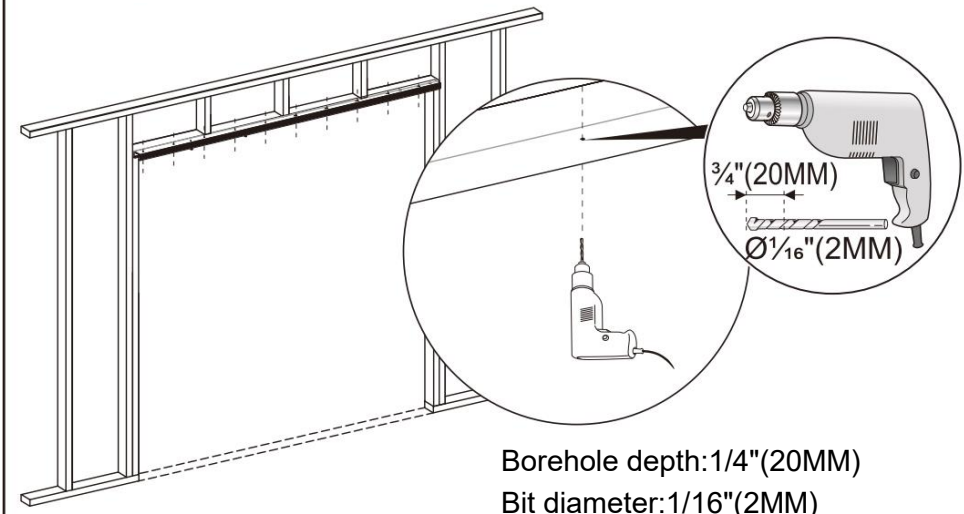


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

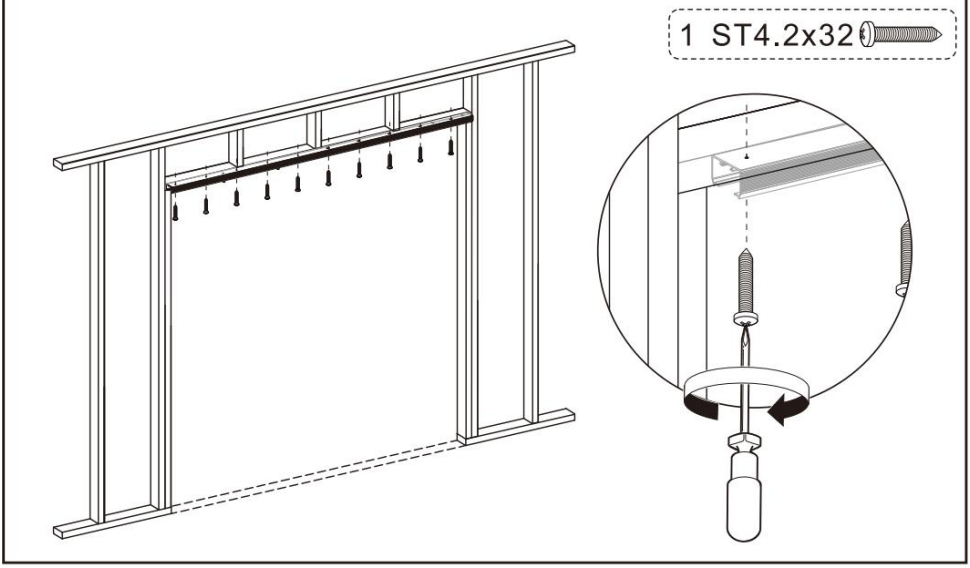

Installatie


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

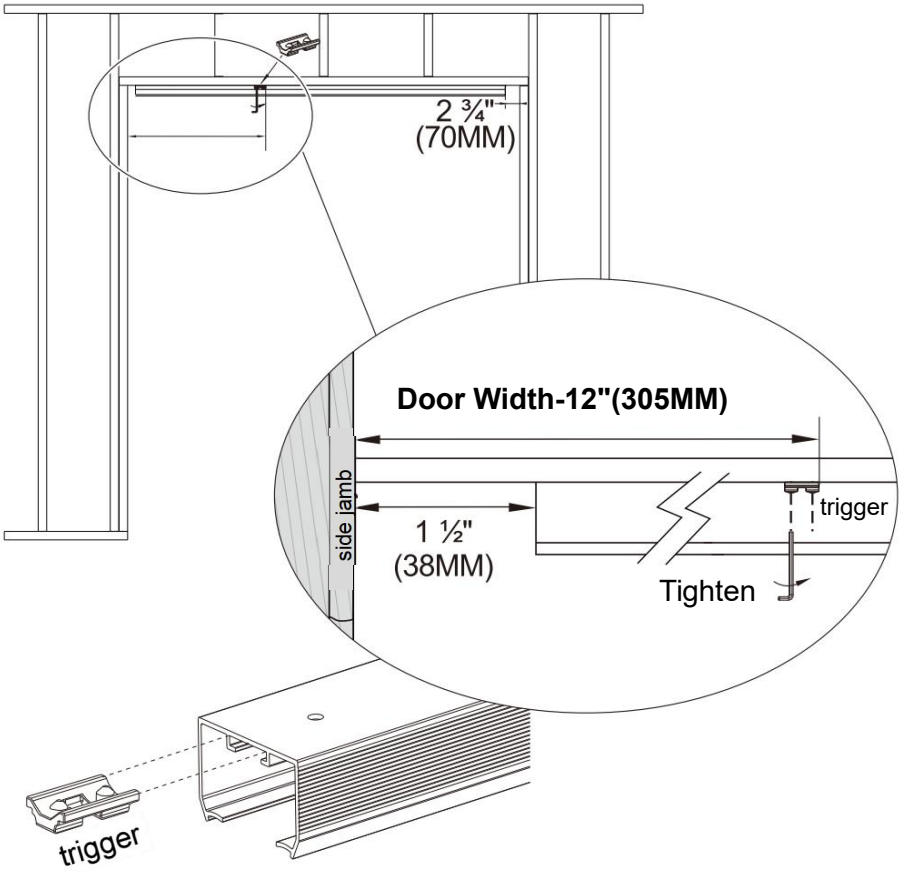

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Installatie


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

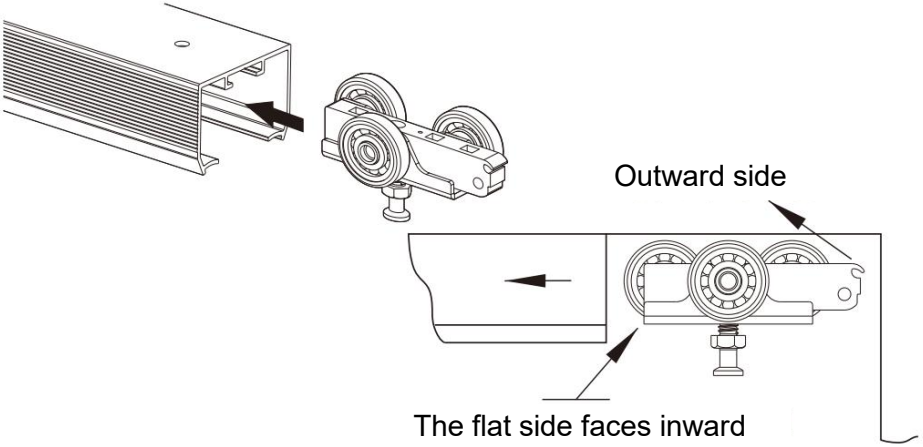

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

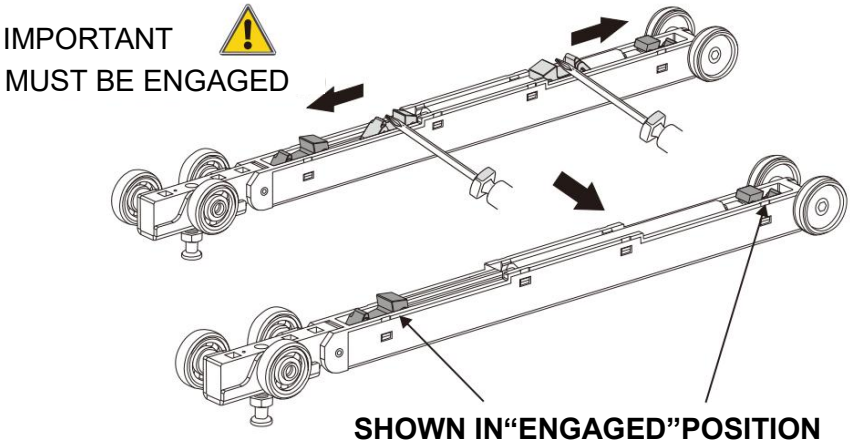


Installatie

9

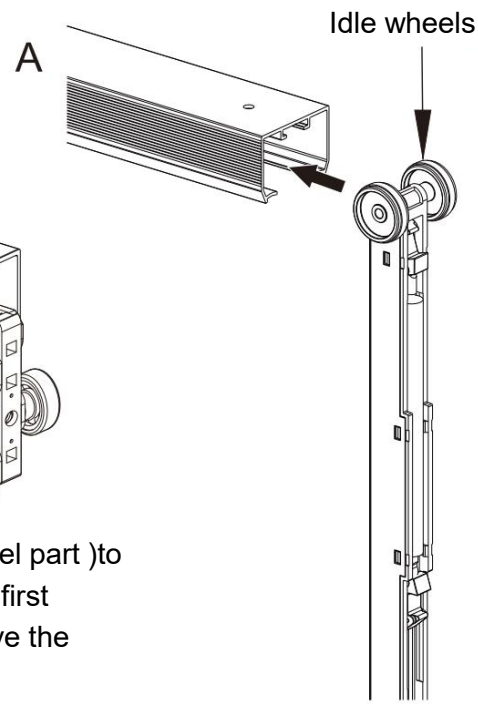

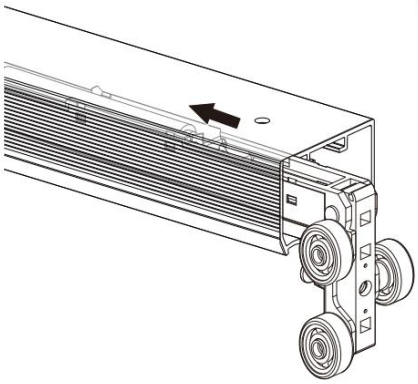


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

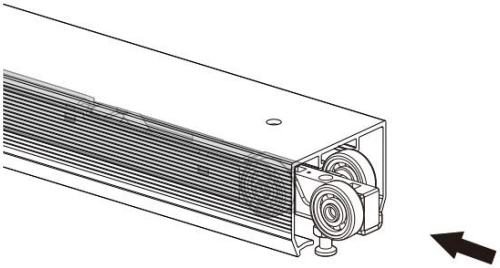





Installatie

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

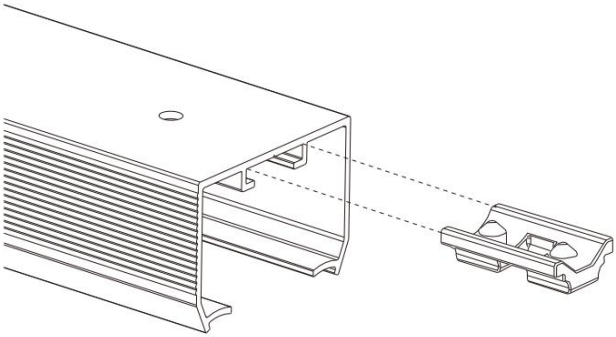

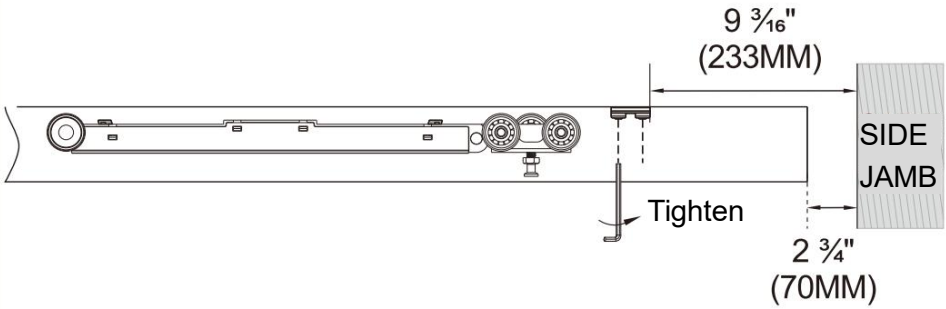




Installatie

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

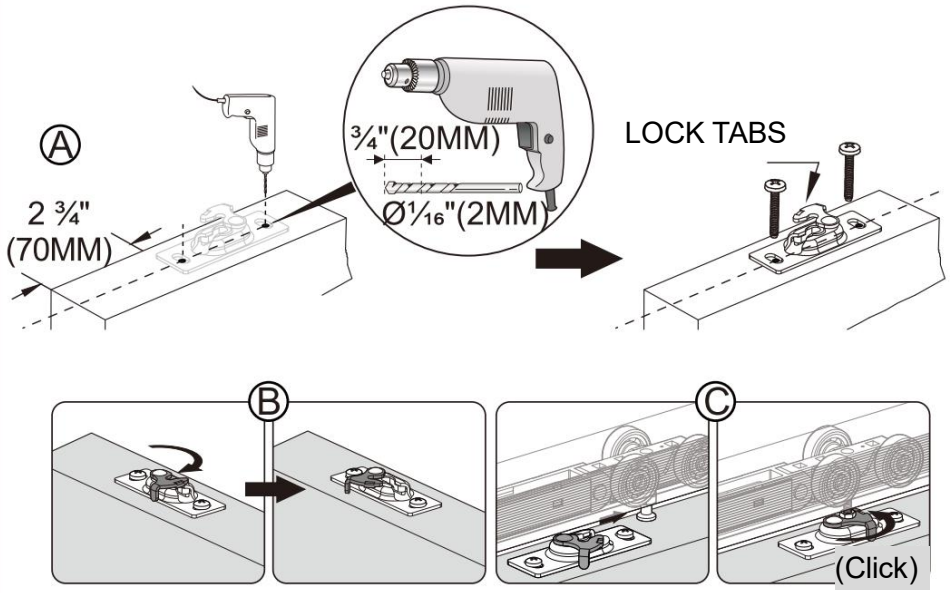

Use spanner to adjust door height.


Installatie

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

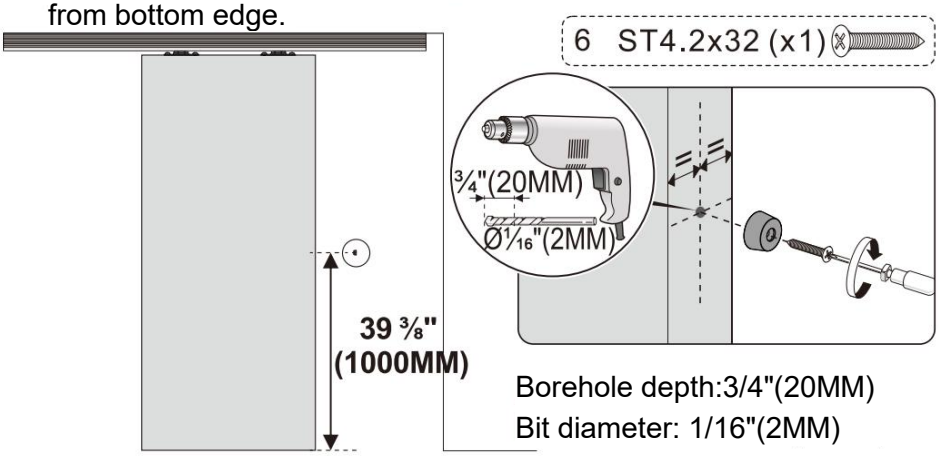

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

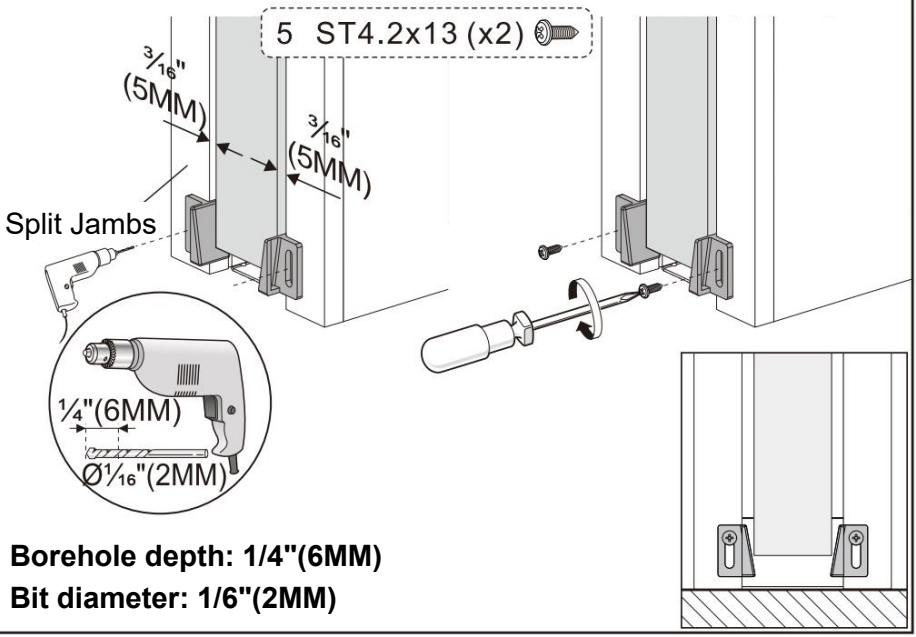

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

4. Vermijd langdurige blootstelling aan de zon om veroudering te

voorkomen.

Fabrikant: Shanghaimuxinmuyeyouxiangongsi
Adres: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Geïmporteerd naar AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD
NSW 2122 Australië
Geïmporteerd naar de VS: Sanven Technology Ltd. Suite 250, 9166 Anaheim
Plaats, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.

